

1 Products affected

Product hierarchy no. *				Part no.	SBU	Type / Description	Customer part no.
SBU	PG	PUG	Type				
01	002	060	0000000660	0853.0571	Circuit protection	OGN-SMD cover black	n/a
				0853.0573		OGN-SMD cover black	n/a
				0853.0573.G		OGN cover black with clamp	n/a
				0853.0576			

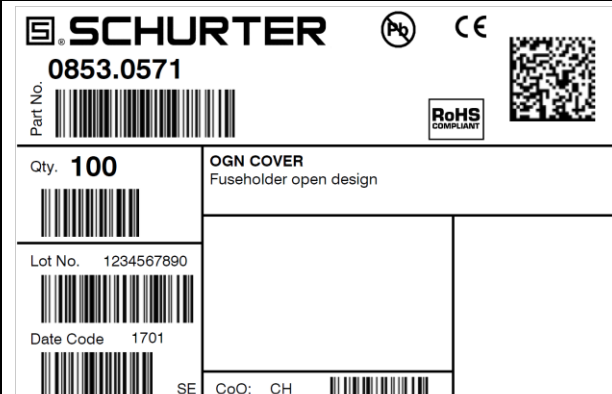
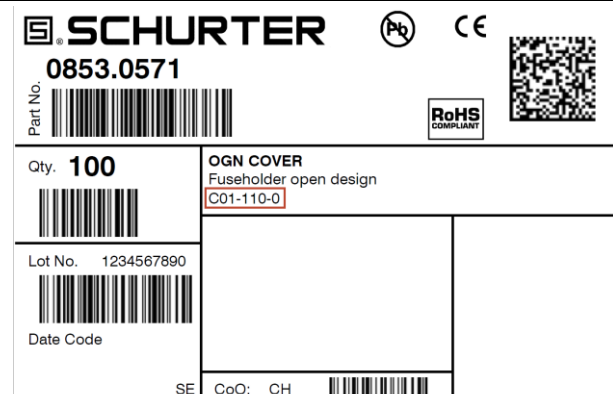
*SBU (2-digit) / PG (3-digit) / PUG (3-digit) / Type (10-digit)

2 Type of change

- Change of material
- Modified label

3 Detailed description of change

The new material fulfil the glow wire requirements given in IEC60127-6:2014 and is free of halogenated flame retardant and red phosphorus. The new material achieves reflow solderability acc. JEDEC JSTD020E (Moisture sensitivity level 1)

Old label		New label	
			

4 Reason of change

Product improvement to fulfil the enhanced glow wire requirements according to the updated standard IEC 60127-6:2014 and the standard IEC 60335-1 for appliances in unattended use.

5 Release date

The change will be rolled-out starting ww 11/2017 and lasts approx. 6 months.

6 Impact of change

Form	Yes	Inscription on socket and isolation material changed
Fit	No	No change for dimension
Function	Yes	Moisture sensitivity level 1 acc. JEDEC J-STD020E
Manufacturing	No	No change for manufacturing site
Label	Yes	Configuration code on label
Packaging	No	No change in packaging

7 Reference Documents / Attachments

Kind of document	Remarks
Data sheet	

Product Change Notification					OGN-SMD Cover isolation material change		
owner	creation date	release date	released by	change order no	rev	page	D10-011-082
dislercy	2016-11-23	2017-02-01	nowakfr	2011797	A	1 of 1	