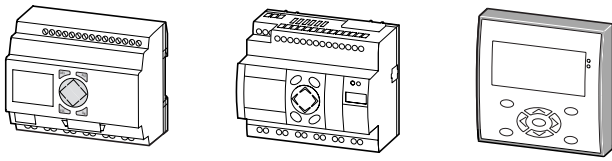




# EASY control relay

EASY control relay



**Contents**  
EASY control relay

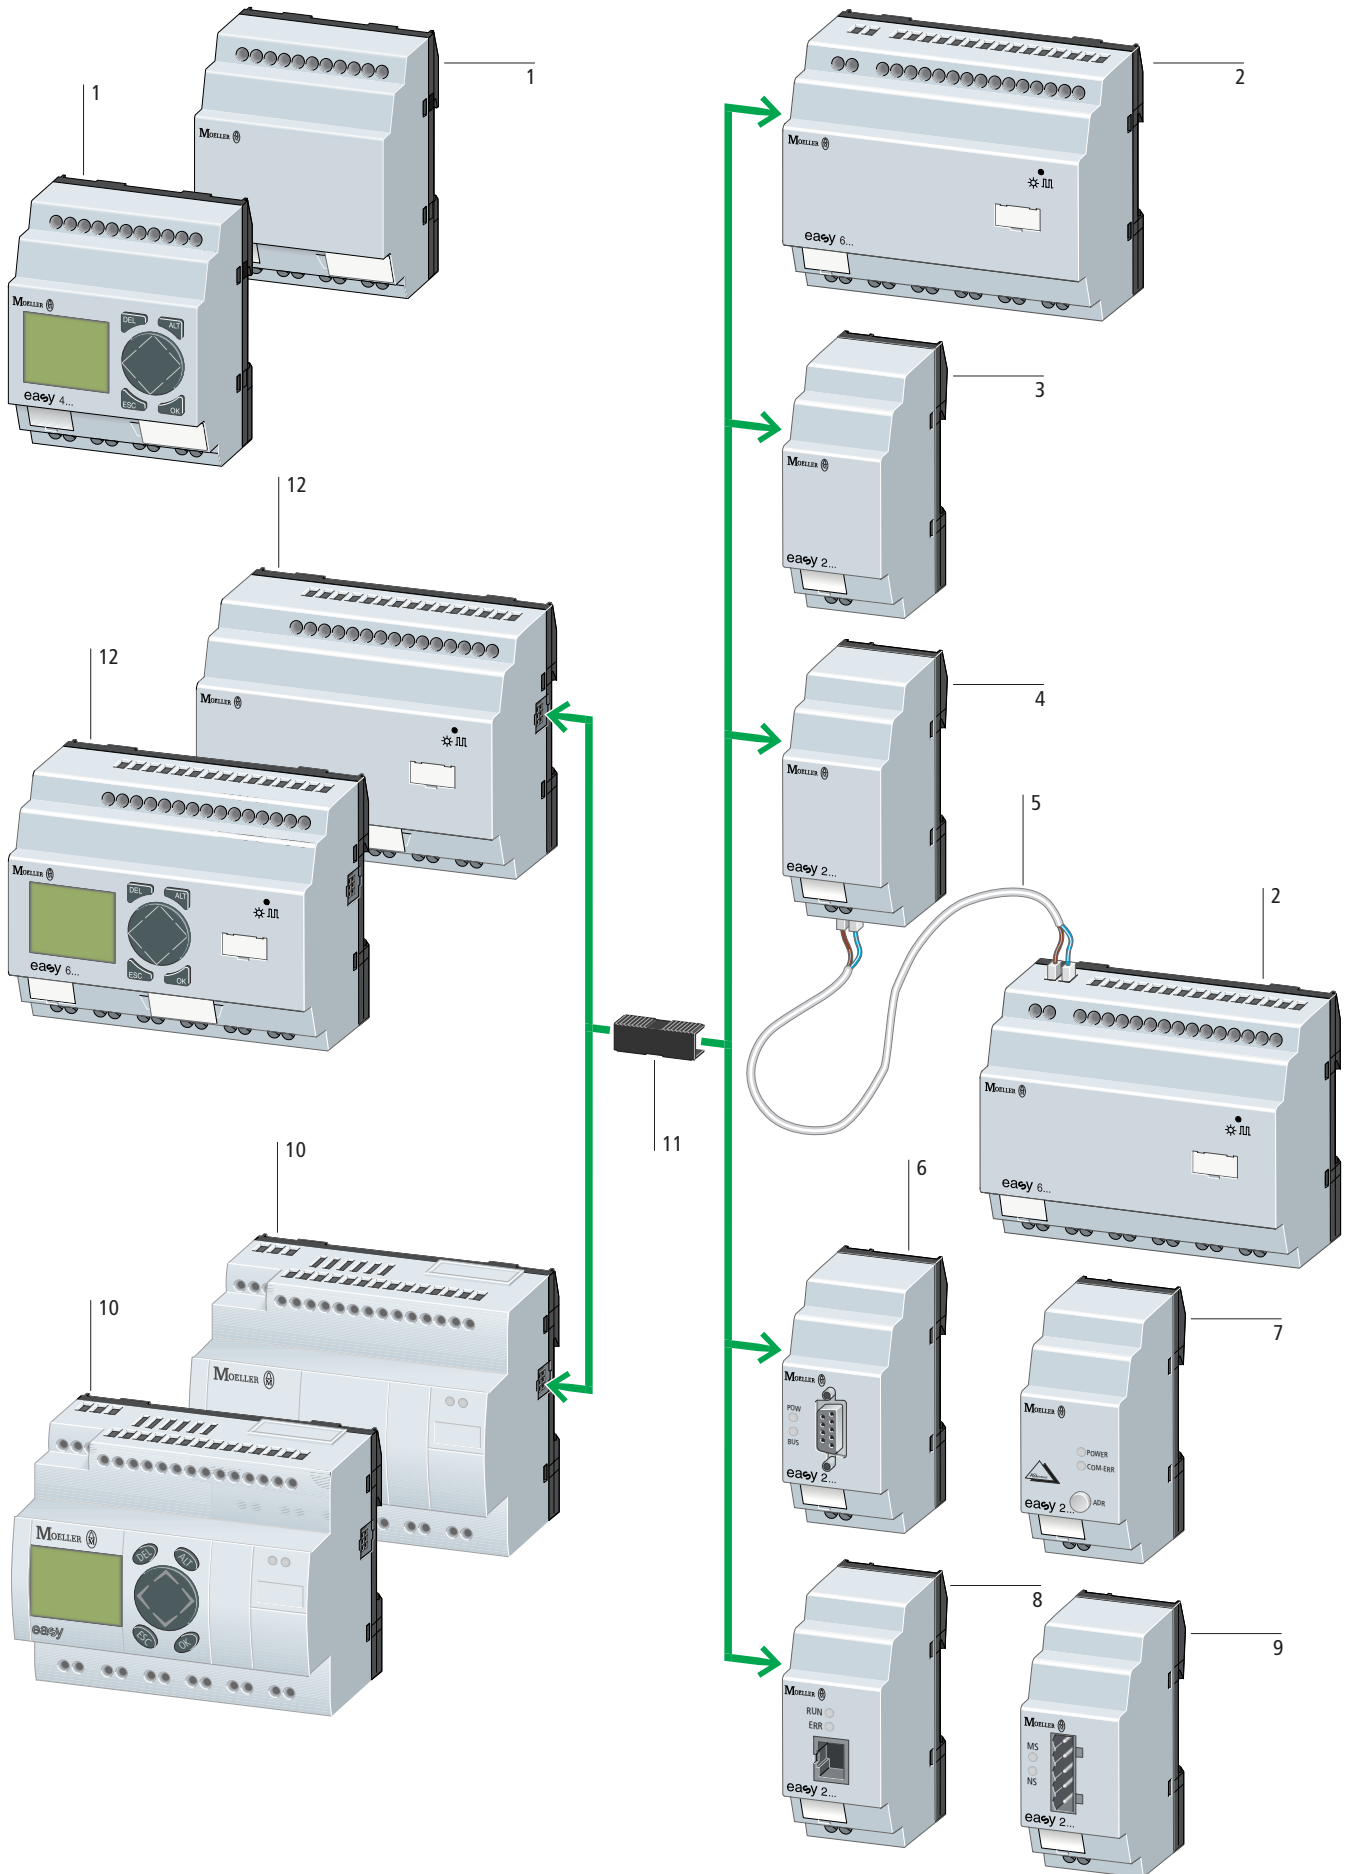


	Page
<b>System overview</b>	4/2
<b>Description</b>	4/4
EASY800 networking	4/4
<b>EASY control relay</b>	4/5
Basic units	4/5
Expansion units	4/9
<b>Multi-function display</b>	4/8
Display/operator unit	4/8
Power supply/CPU modules	4/8
I/O modules	4/8
<b>Accessories</b>	4/9
Documentation	4/11
<b>Technical data</b>	
See Electronic Catalogue 2003	
<b>Dimensions</b>	
See Electronic Catalogue 2003	



# System overview EASY control relay

EASY control relay



# System overview

## EASY control relay

<b>Basic units</b>	1
AC or DC operated	
Power supply AC 100 (115) – 240 V, 50/60 Hz DC 24 V DC DA 12 V DC	
8 digital inputs (2 inputs usable as analog inputs [DC/DA versions only])	
4 relay outputs (max. 10. A)	
4 transistor outputs	
LCD display, X versions without LCD	
Screw fixing and snap fitting	
Screw terminals	
→ Page 4/5	
<b>Expansion device</b>	2
I/O expansion	
AC or DC operated	
Power supply AC 100 – 240 V, 50/60 Hz DC 24 V DC	
12 digital inputs	
6 relay outputs (max. 10 A)	
8 transistor outputs	
Screw fixing and snap fitting	
Screw terminals	
→ Page 4/9	
<b>Expansion device</b>	3
EASY202-RE	
Output expansion	
2 relay outputs (max. 10 A)	
Screw fixing and snap fitting	
Screw terminals	
→ Page 4/9	
<b>Coupling unit</b>	4
→ Page 4/9	
<b>Connection cable</b>	5
e.g. NYM 3 × 1.5 mm <sup>2</sup>	
<b>Networking / bus interfaces</b>	6
EASY204-DP (in preparation for EASY800) PROFIBUS-DP slave connection	
→ Page 4/9	
<b>Networking / bus interfaces</b>	7
EASY205-ASI AS-Interface slave connection	
→ Page 4/9	

<b>Networking / bus interfaces</b>	8
EASY221-CO CANopen interface (in preparation for EASY800) PROFIBUS-DP slave connection	
→ Page 4/9	
<b>Networking / bus interfaces</b>	9
EASY222-DN DeviceNet interface (in preparation for EASY800) PROFIBUS-DP slave connection	
→ Page 4/9	
<b>Basic units, expandable EASY800</b>	10
AC or DC operated	
Power supply AC 100 – 240 V, 50/60 Hz DC 24 V DC	
12 digital inputs (4 inputs usable as analog inputs [DC versions only])	
6 relay outputs (max. 10 A)	
8 transistor outputs	
1 analog output 0 – 10 V (10-bit)	
LCD display, X versions without LCD	
Screw fixing and snap fitting	
Screw terminals	
NET network integrated	
→ Page 4/5	
<b>EASY-LINK-DS data plug</b>	11
For connecting the basic unit with the expansion unit	
→ Page 4/10	
<b>Basic units, expandable EASY619/621</b>	12
AC or DC operated	
Power supply AC 100 – 240 V, 50/60 Hz DC 24 V DC	
12 digital inputs (2 inputs usable as analog inputs [DC versions only])	
6 relay outputs (max. 10 A)	
8 transistor outputs	
LCD display, X versions without LCD	
Screw fixing and snap fitting	
Screw terminals	
→ Page 4/5	

### Features of the EASY control relay

- Wide operational temperature range  
–25 °C to +55 °C
- Standard front dimension for fitting into service distribution boards, 18 mm space unit
- Electronic wiring via pushbuttons, LCD lines, LCD and keypad or software (PC)
- Internal and external saving of circuit diagram in EEPROM memory
- 3 contacts (EASY400, EASY600), 4 contacts (EASY800) (make or break contacts) in series plus one coil per circuit connection
- Series and parallel connection
- 41 circuit connections, EASY412
- 121 circuit connections, EASY600
- 256 circuit connections, EASY800
- Integral password protection for circuit diagram and relay value presets
- Power flow display for testing the circuit diagram (LCD types)
- Ten menu languages (EASY600, EASY800) and five menu languages (EASY412)  
D, GB, F, I, E, (P, NL, S, PL, TR)
- LCD versions allow the circuit diagram to be saved on a memory card

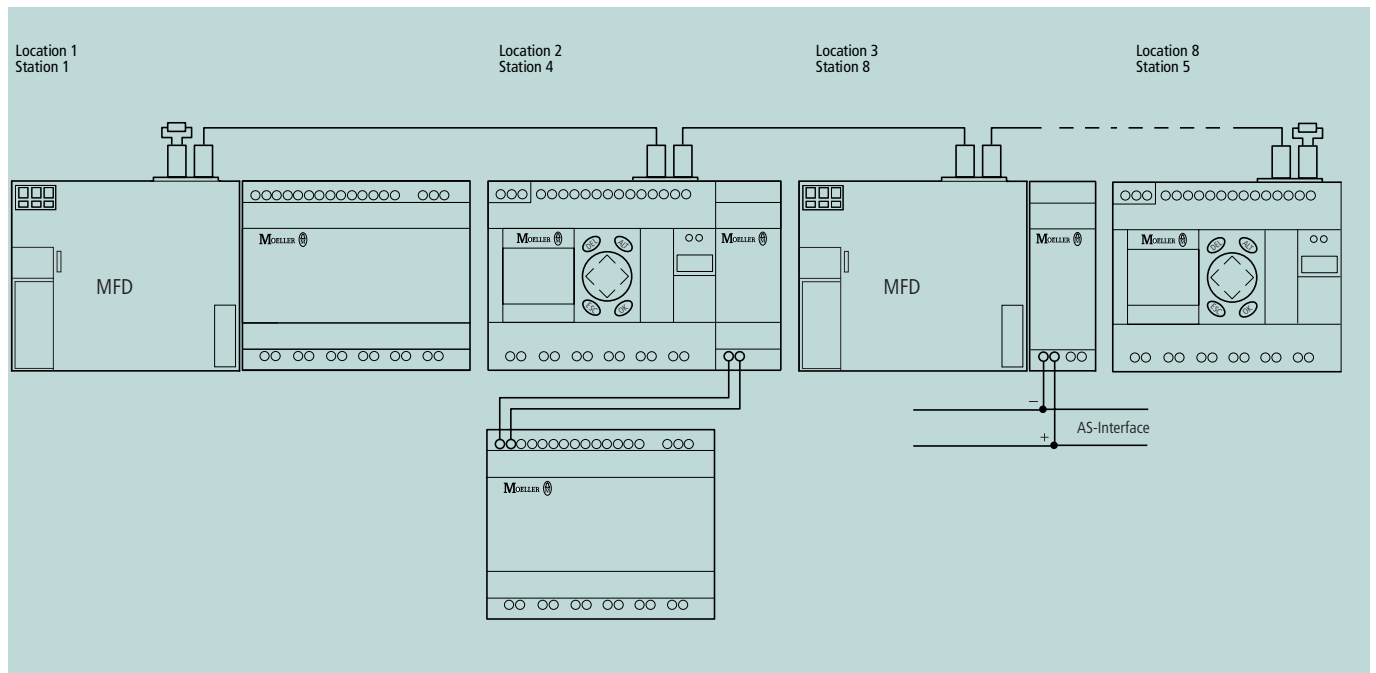
### Functions

- 8 timing relays 0.01 s to 99 h 59 min
  - On-delay
  - On-delay, random switching
  - Off-delayed
  - Off-delayed with random switching
  - Single pulse
  - Flashing
- 32 timing relays (EASY800)
  - On-delayed
  - On-delayed, random switching
  - Off-delayed
  - Off-delayed with random switching
  - On and off-delayed, random switching
  - Single pulse
  - Flashing
- 8 up and down counter relays, 0000 to 9999
- 32 counter relays (EASY800)
  - Value range ± 2<sup>31</sup>
- 4 frequency counters (EASY800)
  - Max. counter frequency ~5kHz
- 4 high-speed counters 4(EASY800)
  - Max. counter frequency ~5kHz
- 2 incremental encoders (EASY800)
  - Max. counter frequency ~3kHz
- 4 operating hours counters (EASY800), retentive
- 4 7-day time switches (4 channels per time switch, one On/Off point per channel, optional on types with clock)
- 32 7-day time switches (EASY800), (4 channels per time switch, one ON/OFF point per channel)
- 32 year time switches (EASY800), (4 channels per time switch, one ON/OFF point per channel)
- 8 analog value comparators range 0 – 10 V (only EASY4..-D..-, EASY6..-D..- types)
- 32 analog value comparators, range 0 – 10 V (EASY8..-D... types only)
- 8 user-definable text displays (EASY600 with LCD), using EASY-SOFT
- 32 user-definable text displays (EASY800 with LCD display), using EASY-SOFT
- 16 auxiliary relays (EASY412), up to 32 auxiliary relays (EASY600)
- 96 markers (EASY800)
- 32 arithmetic function blocks (EASY800)
  - ADD; SUB; MUL; DIV
- 32 Boolean sequences (EASY800)
  - AND; NOT; OR
- Retentive actual values EASY412-D...
  - 4 markers, 1 timing relay, 1 counter
- Retentive actual values EASY600
  - 12 markers, 2 timing relays, 4 counters (e.g. for operating hours counters)
- Retentive actual values EASY800
  - 184 bytes possible, Data = MB (marker byte), function blocks = C; CF; CH; CI; DB; T, i.e. 80 MB and up to 40 function blocks depending on memory required
  - 4 operating hours counters 0 to 10<sup>6</sup> hours (resolution: minutes)



## Description

### easy800 control relay



#### Networking

##### Addressing the stations:

If all stations are connected, the addresses can be assigned automatically, each station number assigned on the basis of geographical location. Stations can also be addressed individually. The geographical address does not have to match the station address.

##### Example of a network topology:




4 stations are interconnected. Station address 1 is always the first location. All other station addresses do not have to match the geographical location.

#### Technical data

- A total of 320 digital inputs and outputs are possible
- 8 stations
- Baud rate: 10 kBit/s to 1000 kBit/s
- Length: up to 1000 m possible
- Modes
  - 1 master (location 1, station address 1), 7 I/O stations
  - Up to
  - 1 master (location 1, station address 1) and 7 intelligent stations
- Transfer of up to 32 double words
- Synchronise time, date
- Direct access to inputs/outputs
- Upload/download program via NET

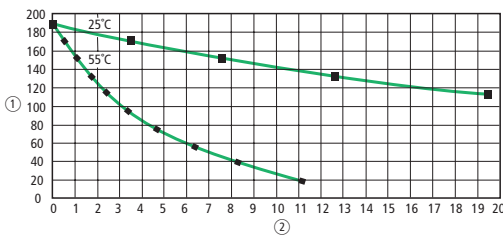
# EASY control relays

## Basic units

Description		Type Article no.	Price See Price List	Std. pack	
<b>Basic units</b>					
  	24 V DC, retentive	<ul style="list-style-type: none"> <li>• 8 digital inputs (2 inputs available as analog inputs)</li> <li>• 4 relay outputs</li> <li>• LCD display</li> <li>• Operating buttons</li> <li>• Screw terminals</li> </ul>	<b>EASY412-DC-R</b> 202403		1 off
		Features same as EASY-412-DC-R, additional time switch	<b>EASY412-DC-RC</b> 202404		
		Features same as EASY-412-DC-RC, without keypad and LCD display	<b>EASY412-DC-RCX</b> 221596		
		<ul style="list-style-type: none"> <li>• 8 digital inputs (2 inputs available as analog inputs)</li> <li>• 4 transistor outputs</li> <li>• LCD display</li> <li>• Operating buttons</li> <li>• Screw terminals</li> <li>• Time switch</li> </ul>	<b>EASY412-DC-TC</b> 207808		
		Features same as EASY412-DC-TC, without keypad and LCD display	<b>EASY412-DC-TCX</b> 212307		
		<ul style="list-style-type: none"> <li>• 12 digital inputs (2 inputs available as analog inputs)</li> <li>• 6 relay outputs</li> <li>• LCD display</li> <li>• Operating buttons</li> <li>• Screw terminals</li> <li>• Time switch</li> <li>• Can be expanded using EASY expansion units</li> </ul>	<b>EASY619-DC-RC</b> 224473		
		Features same as EASY619-DC-RC, without keypad and LCD display	<b>EASY619-DC-RCX</b> 224474		
		<ul style="list-style-type: none"> <li>• 12 digital inputs (2 inputs available as analog inputs)</li> <li>• 8 transistor outputs</li> <li>• LCD display</li> <li>• Operating buttons</li> <li>• Screw terminals</li> <li>• Time switch</li> <li>• Can be expanded using EASY expansion units</li> </ul>	<b>EASY621-DC-TC</b> 218719		
		Features same as EASY621-DC-TC, without keypad and LCD display	<b>EASY621-DC-TCX</b> 212311		
		<ul style="list-style-type: none"> <li>• 12 digital inputs (4 inputs available as analog inputs)</li> <li>• 6 relay outputs</li> <li>• LCD display</li> <li>• Operating buttons</li> <li>• Screw terminals</li> <li>• Time switch</li> <li>• Can be expanded using EASY expansion units</li> </ul>	<b>EASY819-DC-RC</b> 256269		
		Features same as EASY819-DC-RC, without keypad and LCD display	<b>EASY819-DC-RCX</b> 256270		

**Notes**

Backup of real-time clock (only for appropriate devices)






- ① Backup time (hours)
- ② Operating time (years)



# EASY control relays

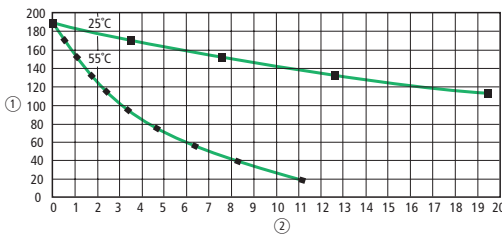
## Basic units

EASY control relays

Description		Type Article no.	Price See Price List	Std. pack
<b>Basic units</b>				
  	24 V DC, retentive	<ul style="list-style-type: none"> <li>• 12 digital inputs (4 inputs available as analog inputs)</li> <li>• 6 relay outputs</li> <li>• 1 analog output</li> <li>• LCD display</li> <li>• Operating buttons</li> <li>• Screw terminals</li> <li>• Time switch</li> <li>• Can be expanded using EASY expansion units</li> </ul>	<b>EASY820-DC-RC</b> 256271	1 off
		Features same as EASY820-DC-RC, without keypad and LCD display	<b>EASY820-DC-RCX</b> 256272	
		<ul style="list-style-type: none"> <li>• 12 digital inputs (4 inputs available as analog inputs)</li> <li>• 8 transistor outputs</li> <li>• LCD display</li> <li>• Operating buttons</li> <li>• Screw terminals</li> <li>• Time switch</li> <li>• Can be expanded using EASY expansion units</li> </ul>	<b>EASY821-DC-TC</b> 256273	
		Features same as EASY821-DC-TC, without keypad and LCD display	<b>EASY821-DC-TCX</b> 256274	
		<ul style="list-style-type: none"> <li>• 12 digital inputs (4 inputs available as analog inputs)</li> <li>• 8 transistor outputs</li> <li>• 1 analog output</li> <li>• LCD display</li> <li>• Operating buttons</li> <li>• Screw terminals</li> <li>• Time switch</li> <li>• Can be expanded using EASY expansion units</li> </ul>	<b>EASY822-DC-TC</b> 256275	
	Features same as EASY822-DC-TC, without keypad and LCD display	<b>EASY822-DC-TCX</b> 256276		
	12 V DC, retentive	<ul style="list-style-type: none"> <li>• 8 digital inputs (2 inputs available as analog inputs)</li> <li>• 4 relay outputs</li> <li>• LCD display</li> <li>• Operating buttons</li> <li>• Screw terminals</li> <li>• Time switch</li> </ul>	<b>EASY412-DA-RC</b> 224471	1 off

**Notes**


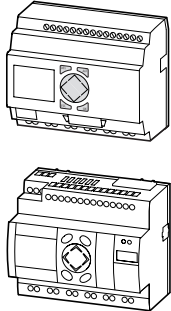
Backup of real-time clock (only for appropriate devices)



- ① Backup time (hours)
- ② Operating time (years)

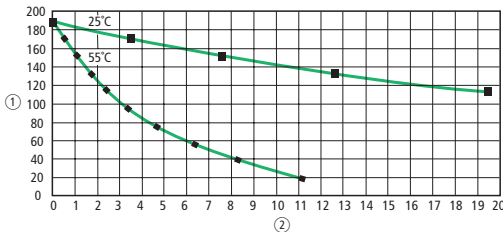
# EASY control relays

## Basic units

Description		Type Article no.	Price See Price List	Std. pack	
<b>Basic units</b>					
	115/230 V AC <ul style="list-style-type: none"> <li>• 8 digital inputs</li> <li>• 4 relay outputs</li> <li>• LCD display</li> <li>• Operating buttons</li> <li>• Screw terminals</li> </ul> Features same as EASY-412-AC-R, additional time switch	<b>EASY412-AC-R</b> 202405		1 off	
		Features same as EASY412-AC-RC, without keypad and LCD display	<b>EASY412-AC-RC</b> 202406		
			<b>EASY412-AC-RCX</b> 212308		
	115/230 V AC, retentive <ul style="list-style-type: none"> <li>• 12 digital inputs</li> <li>• 6 relay outputs</li> <li>• LCD display</li> <li>• Operating buttons</li> <li>• Screw terminals</li> <li>• Time switch</li> <li>• Can be expanded using EASY expansion units</li> <li>• Replaces EASY618-AC-RC</li> </ul> Features same as EASY619-AC-RC, without keypad and LCD display	<b>EASY619-AC-RC</b> 218721		1 off	
			<b>EASY619-AC-RCX</b> 212312		
		<ul style="list-style-type: none"> <li>• 12 digital inputs</li> <li>• 6 relay outputs</li> <li>• LCD display</li> <li>• Operating buttons</li> <li>• Screw terminals</li> <li>• Time switch</li> <li>• Can be expanded using EASY expansion units</li> </ul> Features same as EASY819-AC-RC, without keypad and LCD display	<b>EASY819-AC-RC</b> 256267		
			<b>EASY819-AC-RCX</b> 256268		

**Notes**

Backup of real-time clock (only for appropriate devices)






- ① Backup time (hours)
- ② Operating time (years)



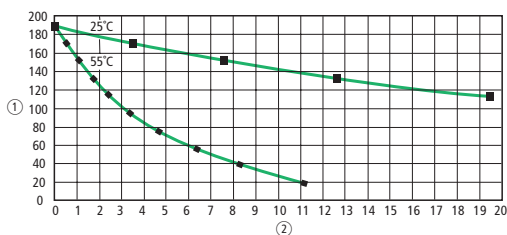
## EASY control relays

### Expansion units

Description	Type Article no.	Price See Price List	Std. pack
<b>Multi-function display</b>			
Display/operating unit IP65, NEMA 4x, Removable Titan front frame			
	Graphical display 132 × 64 pixels Switchable backlight Freely definable status LEDs red + green Individual laser inscription via MFD combination*	<b>MFD-80</b> 265250	1 off
	Graphical display 132 × 64 pixels Switchable backlight Freely definable status LEDs red + green Illuminated keypad with: 4 cursor buttons 4 function buttons 1 mode button Individual laser inscription via MFD combination*	<b>MFD-80-B</b> 265251	1 off
Individual laser inscription Only for MFD-80/-B			
	Inscription using the inscription editor in EASY-SOFT-PRO or only the inscription editor, download → <a href="http://www.moeller.net">www.moeller.net</a>	<b>MFD-COMBINATION-*</b> 265260	1 off
Power supply/CPU modules 24 V DC, IP20			
	Cage clamp terminals Serial interface Suitable for connection of Easy expansions	<b>MFD-CP8-N</b> 267164	1 off
	Cage clamp terminals Serial interface Suitable for connection of Easy expansions Optional easy-NET network	<b>MFD-CP8-NT</b> 265253	1 off
I/O modules IP20, cage clamp terminals			
	12 digital inputs (4 inputs available as analog inputs) 4 relay outputs	<b>MFD-R16</b> 265254	1 off
	12 digital inputs (4 inputs available as analog inputs) 4 transistor outputs	<b>MFD-T16</b> 265255	
	12 digital inputs (4 inputs available as analog inputs) 4 relay outputs 1 analog output	<b>MFD-RA17</b> 265364	
	12 digital inputs (4 inputs available as analog inputs) 4 transistor outputs 1 analog output	<b>MFD-TA17</b> 265256	

**Notes**


Backup/accuracy of real-time clock (only for appropriate devices)



- ① Backup time (hours)  
② Operating time (years)

## EASY control relays

### Networking, accessories


Description	Type Article no.	Price See Price List	Std. pack
<b>Expansion units</b>			
<b>24 V DC</b>			
<ul style="list-style-type: none"> <li>• 12 digital inputs</li> <li>• 8 transistor outputs</li> </ul>	<b>EASY620-DC-TE</b> 212313		1 off
<ul style="list-style-type: none"> <li>• 12 digital inputs</li> <li>• 6 relay outputs</li> </ul>	<b>EASY618-DC-RE</b> 232112		1 off
<b>115/230 V AC</b>			
<ul style="list-style-type: none"> <li>• 12 digital inputs</li> <li>• 6 relay outputs</li> </ul>	<b>EASY618-AC-RE</b> 212314		1 off
<b>Without power supply</b>			
<ul style="list-style-type: none"> <li>• 2 relay outputs (common potential)</li> </ul>	<b>EASY202-RE</b> 232186		1 off
<b>Coupling unit</b>			
<ul style="list-style-type: none"> <li>• Coupling unit for connecting to an EASY619/621 basic unit</li> <li>• Terminals for remote expansion, up to 30 m to/from the expansion unit</li> </ul>	<b>EASY200-EASY</b> 212315		1 off
<b>Expansion units for networking</b>			
<b>AS-Interface</b>			
<ul style="list-style-type: none"> <li>• AS-Interface connection</li> <li>• Slave</li> <li>• 4 inputs, 4 outputs, 4 parameter bits</li> <li>• Addresses available: 0 to 31</li> </ul>	<b>EASY205-ASI</b> 221598		1 off
<b>PROFIBUS-DP</b>			
<ul style="list-style-type: none"> <li>• PROFIBUS-DP slave (RefExtrakt)</li> <li>• Addresses available: 1 to 126</li> </ul>	<b>EASY204-DP</b> 212316		1 off
<b>CANopen</b>			
<ul style="list-style-type: none"> <li>• CANopen interface</li> <li>• Addresses available: 1 to 127</li> </ul>	<b>EASY221-CO</b> 233539		1 off
<b>DeviceNet</b>			
<ul style="list-style-type: none"> <li>• DeviceNet interface</li> <li>• Addresses available: 0 to 63</li> </ul>	<b>EASY222-DN</b> 233540		1 off
<b>Accessories</b>			
<b>Software</b>			
easy400, 600, 800 programming and operating software CD, menu selection in 6 languages Installation on WIN 98, WIN NT 4.0 Service Pack 2000 and higher	<b>EASY-SOFT</b> 202407		1 off
Professional version, such as EASY-SOFT, additional programming and visualization of MFD-Titan	<b>EASY-SOFT-PRO</b> 266040		1 off
<b>Memory card</b>			
8K memory card for storing the entire program for EASY412...	<b>EASY-M-8K</b> 202408		1 off
16K memory card for storing the entire program for EASY6...	<b>EASY-M-16K</b> 212317		1 off
256K module for storing the entire EASY program for EASY8... and the entire MFD-Titan program	<b>EASY-M-256K</b> 256279		1 off
<b>PC programming cable</b>			
2 m length, for connection to 9-pole serial PC interface with interface electronics for EASY412... and EASY6...	<b>EASY-PC-CAB</b> 202409		1 off
2 m length, for connection to 9-pole serial PC interface with interface electronics for EASY6... and MFD-Titan	<b>EASY800-PC-CAB</b> 256277		1 off
<b>Input/output simulator</b>			
 <p>Simulator with power supply unit, 115/230 V AC / 24 V DC output, suitable for EASY412-DC...</p>	<b>EASY412-DC-SIM</b> 212318		1 off
Same as EASY412-DC-SIM, with plug-in power supply unit, 120 V AC/24 V DC output, plug suitable for North America	<b>EASY412-DC-SIM-NA</b> 222566		1 off



## EASY control relays


### Networking, accessories

Description	Type Article no.	Price See Price List	Std. pack
<b>Accessories</b>			
Fixing bracket for screw fixing on an mounting plate			
For screw fixing onto mounting plate: <ul style="list-style-type: none"> <li>• 3 brackets per EASY4...</li> <li>• 3 brackets per EASY6...</li> <li>• 3 brackets per EASY8...</li> <li>• 2 brackets per EASY2...</li> <li>• 3 brackets per MFD-CP8..</li> </ul>	<b>ZB4-101-GF1</b> 061360		9 off
Coupling piece			
Spare link between basic unit and expansion units	<b>EASY-LINK-DS</b> 221607		1 off
Telescopic clip			
With 35 mm top-hat rail to EN 50022 for equalization of the mounting depth of rear mounted devices in CI-K... enclosures and cabinets. Adjustable as required via scales of 75 – 115 mm. Screw and snap fastener (also suitable for PKZM0, FAZ, FIP, ETR, EMR4, etc.)	<b>M22-TA</b> 226161		1 off
Switched-mode power supply unit Primary-switched mode, stabilized			
<ul style="list-style-type: none"> <li>• Rated input voltage: 50/60 Hz: 115/230 V</li> <li>• Rated output voltage: 24 V/12 V</li> <li>• Rated output current: 0.25 A/20 A</li> </ul>	<b>EASY200-POW</b> 229424		1 off
<ul style="list-style-type: none"> <li>• Rated input voltage: 50/60 HZ: 115/230 V AC</li> <li>• Rated output voltage (residual ripple): 24 V DC (± 3 %)</li> <li>• Rated output current: 1.25 A</li> </ul>	<b>EASY400-POW</b> 212319		1 off
Upstream device To increase the AC input current			
<ul style="list-style-type: none"> <li>• 6 channels</li> </ul>	<b>EASY256-HCI</b> 231168		1 off
Network connection cable (remote coupling) Completely prepared for EASY8... NET			
Length: 0.3 m	<b>EASY-NT-30</b> 256283		5 off
Length: 0.8 m	<b>EASY-NT-80</b> 256284		3 off
Length: 1.5 m	<b>EASY-NT-150</b> 256285		2 off
Data cable			
<ul style="list-style-type: none"> <li>• 4-wire</li> <li>• 4 × 0.14 mm<sup>2</sup>, twisted pair, AWG 26</li> <li>• Length 100 m</li> </ul>	<b>EASY-NT-CAB</b> 256286		1 off
Remote coupling			
Bus connector for NET network <ul style="list-style-type: none"> <li>• 8-pole, RJ45</li> </ul>	<b>EASY-NT-RJ45</b> 256280		10 off
Bus terminating resistor, complete with connector for NET	<b>EASY-NT-R</b> 256281		2 off
Crimping tool <ul style="list-style-type: none"> <li>• For 8-pin RJ45 connector</li> </ul>	<b>EASY-RJ45-TOOL</b> 256282		1 off
(SKF) inspection flap window <ul style="list-style-type: none"> <li>• Mounting frame with inspection flap</li> <li>• Material: transparent polycarbonate, UV-resistant</li> <li>• Self-extinguishing to ASTM-D 635/72, UNE 53315-75, UNE 20672/83 (2-1) and IEC-695-2-1</li> <li>• Degree of protection IP65 to IEC-144 and 525</li> </ul>			
<ul style="list-style-type: none"> <li>• 94 mm × 77 mm × 25 mm (4 space units)</li> </ul>	<b>SKF-FF4</b> 233780		1 off
<ul style="list-style-type: none"> <li>• 130 mm × 77 mm × 25 mm (6 space units)</li> </ul>	<b>SKF-FF6</b> 233781		1 off



## EASY control relays

### Documentation

Description	Type Article no.	Price See Price List	Std. pack
<b>Accessories</b>			
 Top-hat rail adapter for inspection flap window <ul style="list-style-type: none"> <li>• 12 mm × 66 mm × 82 mm</li> <li>• Mounting on inspection flap window with front mounting units</li> </ul>	<b>SKF-HA</b> 233782		2 off
PROFIBUS-DP bus connector plug <ul style="list-style-type: none"> <li>• 9-pole (male),</li> <li>• Kit without cable for connecting the data cable for PROFIBUS-DP</li> </ul>	<b>ZB4-209-DS2</b> 206982		1 off
<ul style="list-style-type: none"> <li>• Metallised insulated housing</li> <li>• Maximum transfer rate 12 MBit/s</li> <li>• Integrated switch (accessible from the outside) for the bus terminating resistors</li> <li>• Terminal block for two cable inputs, optionally with straight or 90° angled cable entry</li> <li>• Suitable for EASY204-DP</li> </ul>	<b>ZB4-209-DS3</b> 217820		1 off
PROFIBUS DP data cable <ul style="list-style-type: none"> <li>• 2-wire</li> <li>• 2 × 0.64 mm<sup>2</sup> twisted</li> <li>• Length 100 m</li> </ul>	<b>ZB4-900-KB1</b> 206983		100 off
Protective cover, transparent For MFD-Titan multi-function display can be rotated by 4 × 90° Sealing facility for protection against accidental actuation (without RMQ-Titan front frame)	<b>MFD-XS-80</b> 265259		1 off
Protective membrane For MFD-Titan multi-function display Transparent diaphragms for severe environmental conditions and use in the food industry. (without RMQ-Titan front frame)	<b>MFD-XM-80</b> 265258		1 off
PC programming cable For connecting MFD-Titan to easy800 or MFD-Titan to MFD-Titan 2 m long, made up	<b>MFD-800-CAB</b> 265257		1 off
5 m long, can be prepared as required, with separate plug	<b>MFD-800-CAB5</b> 266041		1 off

	Language	Type Article no.	Price See Price List	Std. pack
<b>Documentation</b>				
Manual for the EASY400/600 control relay	German	<b>AWB2528-1304-D</b> 205375		30 off
	English	<b>AWB2528-1304-GB</b> 205481		50 off
	French	<b>AWB2528-1304-F</b> 205482		1 off
	Italian	<b>AWB2528-1304-I</b> 205483		–
	Spanish	<b>AWB2528-1304-E</b> 205484		–
Manual for the EASY800 control relay	German	<b>AWB2528-1423D</b> 261371		1 off
Manual for the EASY800 control relay	English	<b>AWB2528-1423GB</b> 262671		1 off
Manual for the MFD-Titan	German	<b>AWB2528-1480D</b> 267187		1 off
Manual for the MFD-Titan	English	<b>AWB2528-1480GB</b> 267188		1 off

