

Grommet - WR-DA-M32/PG29 - 1644847

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)




Seal, outside, to increase the degree of protection, size M32 or Pg21

The illustration shows the version WR-DI-PG 21 and WR-DA-PG21



Key commercial data

| | |
|--------------------------------------|---|
| Packing unit | 5 pc |
| Minimum order quantity | 5 pc |
| GTIN |  4 017918 911140 |
| Weight per Piece (excluding packing) | 6.61 g |
| Custom tariff number | 39269097 |
| Country of origin | Germany |

Technical data

General

| | |
|---------------|-----|
| Seal material | PUR |
|---------------|-----|

Classifications

eCl@ss

| | |
|------------|----------|
| eCl@ss 4.0 | 27141209 |
| eCl@ss 4.1 | 27141209 |
| eCl@ss 5.0 | 27149109 |
| eCl@ss 5.1 | 27149109 |
| eCl@ss 6.0 | 27149109 |
| eCl@ss 7.0 | 27149109 |

ETIM

| | |
|----------|----------|
| ETIM 2.0 | EC000441 |
|----------|----------|

Grommet - WR-DA-M32/PG29 - 1644847

Classifications

ETIM


| | |
|----------|----------|
| ETIM 3.0 | EC000441 |
| ETIM 4.0 | EC002498 |
| ETIM 5.0 | EC002498 |

UNSPSC

| | |
|---------------|----------|
| UNSPSC 6.01 | 30211808 |
| UNSPSC 7.0901 | 39121408 |
| UNSPSC 11 | 39121408 |
| UNSPSC 12.01 | 39121408 |
| UNSPSC 13.2 | 39121408 |

Drawings

Dimensioned drawing

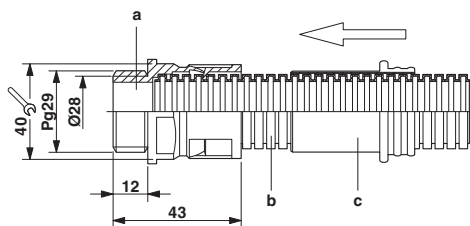


Assembly instructions for Pg29 corrugated pipe

- a = Corrugated screw connection
- b = Corrugated pipe
- c = Opener

Installation note:

Cut the corrugated pipe in the groove to retain a round shape for insertion. The lighter seal (not depicted in the illustration) is positioned in the corrugated pipe screw connection below the safety latch. The darker outer seal (not depicted in the illustration) is placed over the corrugated pipe screw connection from outside. The corrugated pipe is then pushed as far as possible into the corrugated pipe screw connection and clicks into place. The screw connection is opened by placing the yellow corrugated pipe opener with force between the safety latch and the corrugated tube and the corrugated pipe is then pulled out.

Dimensioned drawing

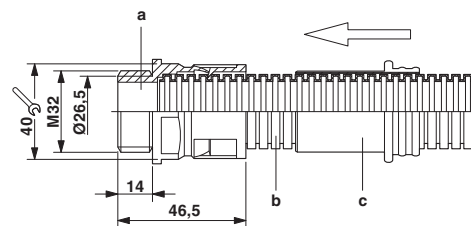

Assembly instructions for M32 corrugated pipe

- a = Corrugated screw connection
- B = Corrugated pipe
- c = Opener

Installation note:

Cut the corrugated pipe in the groove to retain a round shape for insertion. The lighter seal (not depicted in the illustration) is positioned in the corrugated pipe screw connection below the safety latch. The darker outer seal (not depicted in the illustration) is placed over the corrugated pipe screw connection from outside. The corrugated pipe is then pushed as far as possible into the corrugated pipe screw connection and clicks into place. The screw connection is opened by placing the yellow corrugated pipe opener with force between the safety latch and the corrugated tube and the corrugated pipe is then pulled out.