



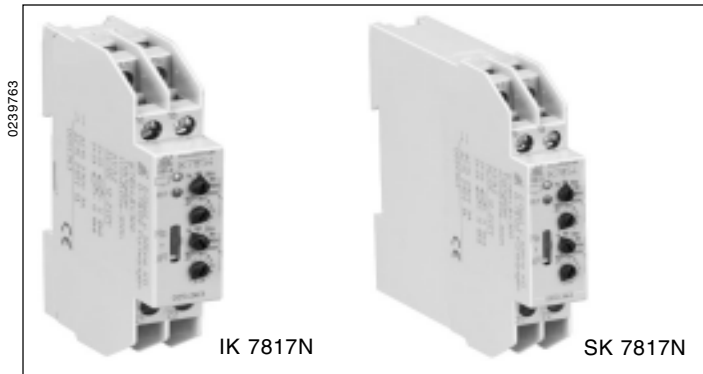

Circuit diagrams

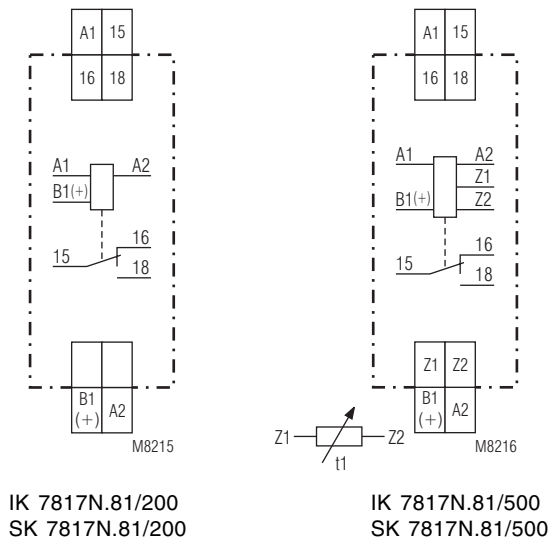

- According to IEC/EN 61 812-1
 - 8 functions settable via rotational switch:
 - Delay on energisation (AV)
 - Fleeting on make (EW)
 - Delay pulse (IE)
 - Flasher, start with pulse (BI)
 - Delay on de-energisation (RV)
 - Pulse forming function (IF)
 - Fleeting on break (AW)
 - Delay on energisation and de-energisation (AV / RV)
 - 8 time ranges from 0,02 s ... 300 h selectable via rotational switches
 - Voltage range AC/DC 12 ... 240 V
 - With time interruption / time adding input
 - Adjustment aid for quick setting of long time values
 - Suitable for 2-wire proximity sensor control
 - 1 changeover contact
 - LED indicators for operation, contact position and time delay
 - **Devices available in 2 enclosure versions:**
 - IK 7817N:** depth 59 mm, with terminals at the bottom for installation systems and industrial distribution systems according to DIN 43 880
 - SK 7817N:** depth 98 mm, with terminals at the top for cabinets with mounting plate and cable duct
 - 17,5 mm width
- IK/SK 7817N/500: as IK/SK 7817N/200 but with
- 2 additional functions:
 - Cyclic timer, start with break (TP)
 - Fleeting on make and break (EW / AW)
 - second time setting t2 for functions
 - Cyclic timer, start with pulse (TI) or break (TP), based on the separate setting of pulse and break time the flasher function can be used as cyclic timer.
 - Fleeting on make and break (EW/AW)
 - Delay on energisation and de-energisation (AV / RV)
 - Delay pulse (IE): setting of pulse length
 - Connection facility for external potentiometer 10 kΩ

Approvals and marking



Application

Time-dependent controllers

Indicators

green LED:	on, when voltage connected
yellow LED "R/t":	shows status of output relay and time delay:
- Continuously off:	output relay not active; no time delay
- Continuously on:	output relay active; no time delay
- Flashing (short on, long off)	output relay not active; time delay
- Flashing (long on, short off)	output relay active; time delay

Notes

Control of A1-A2 with proximity sensors

The input can be controlled by DC 3 wire or AC/DC 2 wire proximity sensors. For operating voltage > 24 V and usage of sensors without built-in short circuit protection a protection resistor on A1 is recommended to reduce the inrush current. The dimension is as follows:


$$R_v \approx \text{operating voltage} / \text{max. switching current of sensor}$$

The series resistor must not be selected higher than necessary.

Max. values are:

Operating voltage:	48 V	60 V	110 V	230 V
Series resistor R_v max:	270 Ω	390 Ω	680 Ω	1,8 kΩ (1 W)

Function diagram

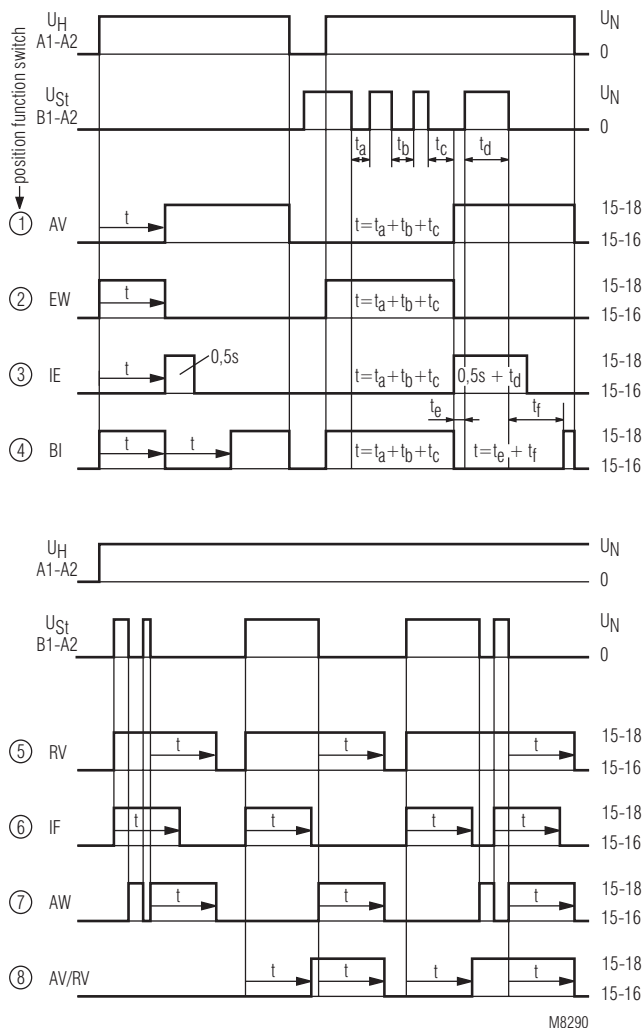


IK 7817N/200, SK 7817N/200

① ... ⑧ = position of function switch

- | | |
|----------------------------------|---|
| ① AV = Delay on energisation | ⑤ RV = Delay on de-energisation |
| ② EW = Fleeting on make | ⑥ IF = Pulse forming function |
| ③ IE = Delayed pulse | ⑦ AW = Fleeting on break |
| ④ BI = Flasher, start with pulse | ⑧ AV/RV = Delay on energisation and de-energisation |

Function diagram

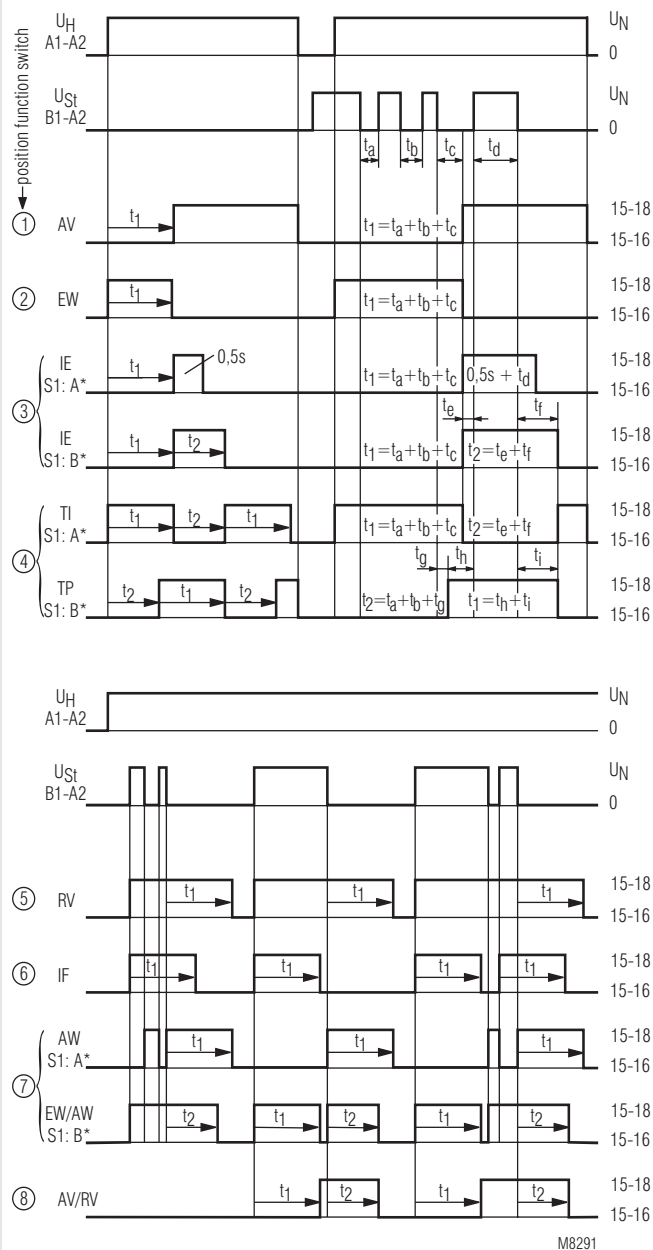

*) A and B indicate the position of function slide switch S1

IK 7817N/500, SK 7817N/500

① ... ⑧ = position of function switch

- | | |
|--|---|
| ① AV = Delay on energisation | ⑤ RV = Delay on de-energisation |
| ② EW = Fleeting on make | ⑥ IF = Pulse forming function |
| ③ IE = Delay pulse | ⑦ AW = Fleeting on break |
| S1 in position A:
t_1 : adjustable, $t_2 = 0,5$ s fixed | EW/AW = Fleeting on make and break |
| S1 in position B:
t_1 and t_2 adjustable | S1 in position B |
| ④ TI = Cyclic timer, start with pulse
S1 in position A | ⑧ AV/RV = Delay on energisation and de-energisation |
| TP = Cyclic timer, start with break
S1 in position B | |

Notes

Adjustment assistance

The flashing period of the yellow LED is $1 \text{ s} \pm 4 \%$ and can be used to adjust the time. Especially on the lower end of scale and for long times it is suitable as the multiplication factors between the different time ranges are exact without tolerance.

Example:

The required time is 40 min. It has to be adjusted within range 3 ... 300 min. The time check takes too long as several timing cycles would be necessary for a precise value. For faster adjustment the setting is made to 0.03 ... 3 min. On this range the potentiometer should be set to 0.4 min (= 24 sec.). With the right potentiometer setting the LED must show 24 flashing cycles. After that the time range is switched over to 3 ... 300 min. and the setting is complete.

Time interruption / time adding

With the functions AV, EW, IE and BI the time delay can be interrupted by controlling input B1 (+) with control voltage. Removing the control signal will continue the timing cycle (time addition).

Control input B1

The functions RV, IF, AW, AV / RV have to be controlled via input B1 (+) with voltage against A2. The control signal could be the same as the auxiliary/control voltage of A1 or any other voltage between 12 and 240 V AC or DC. Operating a parallel load between B1 and A2 is also possible.

If with function IF the inputs A1 and B1 are controlled simultaneously a pulse with the adjusted length is started.

With the variant IK/SK 7817N/500 the output pulse can be disabled by setting the slide switch in position "B".

Remote potentiometer

The setting of t1 on variant IK/SK 7817N/500 can also be made by a remote potentiometer of 10 kOhms. The connection is made via Z1-Z2. When connecting a remote potentiometer the rotational switch for t1 has to be set to min. If no remote potentiometer is required the terminals Z1-Z2 have to be linked.


The wires to the remote potentiometer should be installed separately from the lines with mains voltage. If this is not possible, a screened cable is recommended where the shield is connected to Z1.

To terminals Z1 and Z2 no external voltage must be connected, as the unit might be damaged.

Additional function

With the variant IK/SK 7817N/500 additional features can be selected for the functions position 3, 4 and 7 using the slide switch S1 on the relay front in position "B". At the same time a second time setting t2 is available on the lower rotational switch for the functions 3, 4, 7 and 8 (see function diagram). The time range is the same as for t1.

Setting

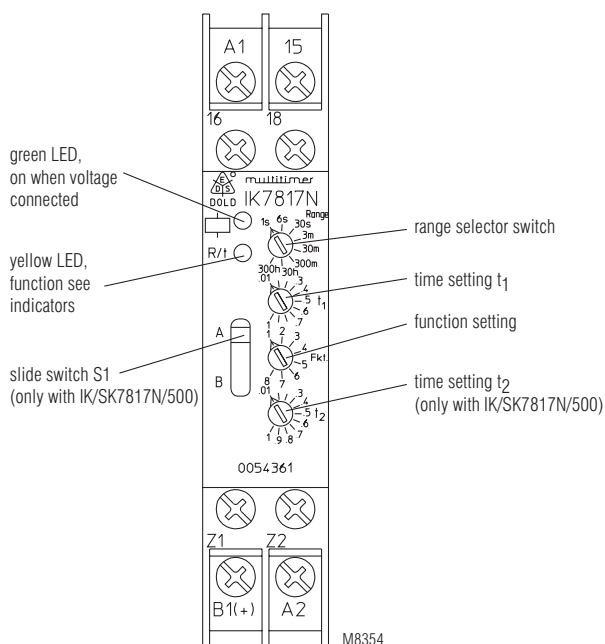

Technical data

Time circuit

Time ranges:

8 time ranges in one unit, settable via rotational switch
 0,02 ... 1 s 0,3 ... 30 min
 0,06 ... 6 s 3 ... 300 min
 0,3 ... 30 s 0,3 ... 30 h
 0,03 ... 3 min 3 ... 300 h

Time setting t1, t2:

continuous, 1:100 on relative scale (t2 only at IK/SK 7817N/500)

Recovery time:

at DC 24 V: approx. 15 ms
 at DC 240 V: approx. 50 ms
 at AC 230 V: approx. 80 ms
Repeat accuracy: $\pm 0,5 \%$ of selected end of scale value + 20 ms

Voltage and temperature influence:

< 1 % with the complete operating range

Input

Nominal voltage U_N :

AC/DC 12 ... 240 V

Voltage range:

0,8 ... 1,1 U_N

Release voltage (A1/A2)

AC 50 Hz: approx. 7,5 V
 DC: approx. 7 V

Max. permitted residual current with 2-wire proximity sensor control (A1-A2)

up to AC/DC 150 V: AC resp. DC 5 mA
 up to AC/DC 264 V: AC resp. DC 3 mA
Control current B1: input resistance approx. 220 kΩ in series with diode

Min. on/off time of control input B1(+):

AC 50 Hz: approx. 15 ms / ca. 60 ms
 DC: approx. 5 ms / ca. 60 ms

Release voltage (B1/A2)

AC 50 Hz: approx. 5 V
 DC: approx. 4 V

Nominal power consumption

AC 12 V: approx. 1,5 VA
 AC 24 V: approx. 2 VA
 AC 240 V: approx. 3 VA
 DC 12 V: approx. 1 W
 DC 24 V: approx. 1 W
 DC 240 V: approx. 1 W
Nominal frequency: 45 ... 400 Hz

Output

Contacts

IK/SK 7817N.81: 1 changeover contact
 4 A

Thermal current I_{th} :

4 A

Switching capacity

to AC 15
 NO contact: 3 A / AC 230 V IEC/EN 60 947-5-1
 NC contact: 1 A / AC 230 V IEC/EN 60 947-5-1
 nach DC 13: 1 A / DC 24 V IEC/EN 60 947-5-1

Electrical life

to AC 15 at 1 A, AC 230 V: $1,5 \times 10^5$ switching cycles IEC/EN 60 947-5-1

Short circuit strength

max. fuse rating: 4 A gL IEC/EN 60 947-5-1

Mechanical life:

$\geq 30 \times 10^6$ switching cycles

General data

Operating mode:

Continuous operation

Temperature range:

- 40 ... + 60 °C

Clearance and creepage distances

overvoltage category /
 contamination level:

4 kV / 2

IEC 60 664-1

Technical data			
EMC			
Electrostatic discharge:	8 kV (air)	IEC/EN 61 000-4-2	
HF-irradiation:	30 V / m	IEC/EN 61 000-4-3	
Fast transients:	2 kV	IEC/EN 61 000-4-4	
Surge voltages between wires for power supply:	2 kV	IEC/EN 61 000-4-5	
between wire and ground:	4 kV	IEC/EN 61 000-4-5	
HF-wire guided:	10 V	IEC/EN 61 000-4-6	
Interference suppression:	Limit value class B	EN 55011	
Degree of protection			
Housing:	IP 40	IEC/EN 60 529	
Terminals:	IP 20	IEC/EN 60 529	
Housing: Thermoplastic with V0 behaviour according to UL subject 94			
Vibration resistance: Amplitude 0,35 mm, frequency 10 ... 55 Hz, IEC/EN 60 068-2-6			
Climate resistance: 40 / 060 / 04 IEC/EN 60 068-1			
Terminal designation: EN 50 005			
Wire connection: 2 x 2,5 mm ² solid or 2 x 1,5 mm ² stranded wire with sleeve DIN 46 228/-1/-2/-3/-4			
Wire fixing: Flat terminal with self-lifting clamping piece IEC/EN 60 999-1			
Mounting: DIN rail IEC/EN 60 715			
Weight:			
IK 7817N/200:	approx. 65 g		
SK 7817N/200:	approx. 84 g		

Dimensions

Width x height x depth:

IK 7817N/200:	17,5 x 90 x 59 mm
SK 7817N/200:	17,5 x 90 x 98 mm

Standard type

IK 7817N.81/200 AC/DC 12 ... 240 V

Article number:	0054359
• Output:	1 changeover contact
• Nominal voltage U_N :	AC/DC 12 ... 240 V
• Time ranges:	from 0,02 s ... 300 h
• Width:	17,5 mm

SK 7817N.81/200 AC/DC 12 ... 240 V

Article number:	0058364
• Output:	1 changeover contact
• Nominal voltage U_N :	AC/DC 12 ... 240 V
• Time ranges:	from 0,02 s ... 300 h
• Width:	17,5 mm

Variant

IK/SK 7817N.81/500:	With 2 additional functions selectable via slide switch S1: - Cyclic timer, start with break (TP) - Fleeting on make and break (EW/AW) second time setting t2, connection facility for remote potentiometer 10 k Ω (t1)
---------------------	---

Ordering example for variant

IK 7817N	.81	/	—	—	AC/DC 12 ... 240 V	
						Nominal voltage
						Variant
						Contacts
						Type

Accessories


AD 3:

External potentiometer 10 k Ω



The external potentiometer is used for remote setting of the time delay. The internal potentiometer of the timer must be set to min. time delay.

Degree of protection front side:


IP 60

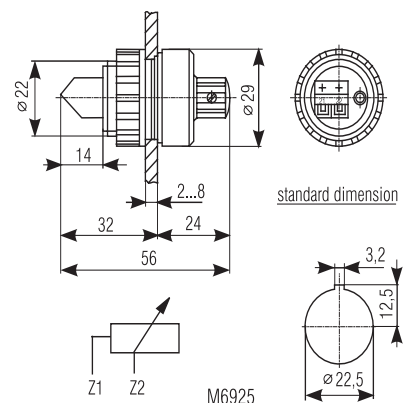

Connectin examples

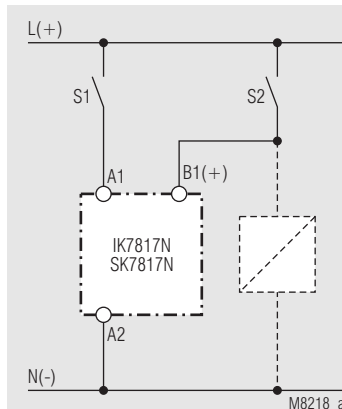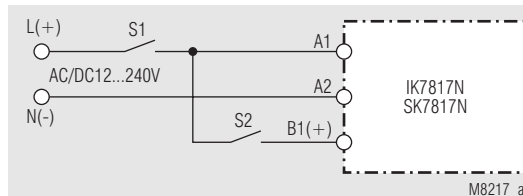

Control with parallel connected load

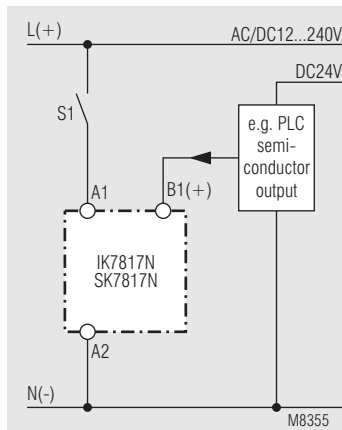

Connection with 2 different control voltages.