

960 Interface Box for KombiSIGN 71

Direct triggering from PC via RS 232 or RS 485 interfaces

Programming of various drives via serial interface

Triggering of up to 5 independent elements of a KombiSIGN signal tower

Up to 127 signal towers can be addressed

Monitoring of each element possible

Version for Bus systems available on request



TECHNICAL SPECIFICATIONS

Dimensions of interface box
(L x W x H):

80 x 80 x 66 mm

Material:

ABS

Drive:

24 V DC

Interfaces:

RS 232, RS 485



Assembly:

96000016

96000017

- Interface box
- Terminal element
- 2 cable glands M 16

- Interface box
- Terminal element
- 1 cable glands M 16
- Network appliance with cable
- Connection cable RS 232 and RS 485 and 2 m cable with Sub-D 9-pin and socket for power supply
- CD with demonstration programme
- Programming handbook

Software:

Driver for Labview
Demo programme and driver for RS 232 interface box. Only useable in conjunction with the product.

[labview.zip \(42 k\)](#)
[demo.zip \(1.5 MB\)](#)



ORDER SPECIFICATIONS

96000016

Interface Box

96000017

Interface Box incl.
accessories

Direct triggering from PC via RS 232 or RS 485 interfaces
 Programming of various drives via serial interface
 Triggering of up to 5 independent elements of a KombiSIGN signal tower
 Up to 127 signal towers can be addressed
 Monitoring of each element possible
 Version for Bus systems available on request



TECHNICAL DIAGRAMS

96000016

Interface Box

96000017

Interface Box incl. accessories

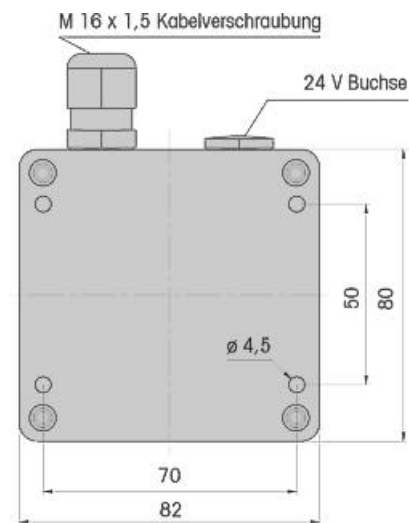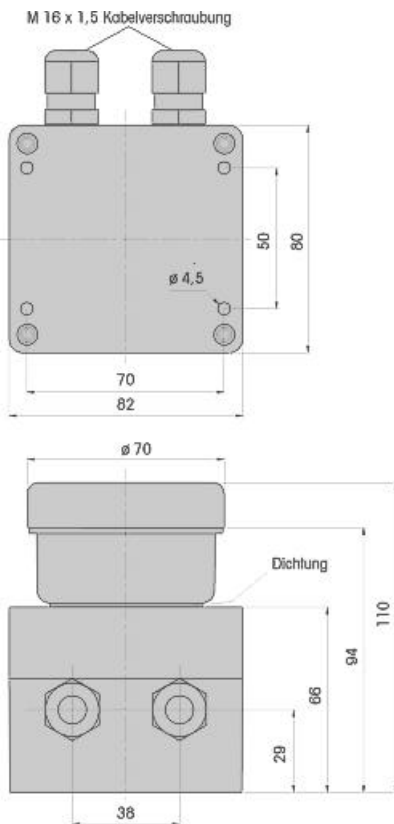

[Terms and Conditions](#) - [Imprint](#)

Werma Signaltechnik GmbH + Co.KG · Dürbheimer Straße 15 · D-78604 Rietheim-Weilheim
 Tel. ++49 (0) 74 24 / 95 57-0 · Fax. ++49 (0) 74 24 / 95 57-44 · eMail: info@werma.de