THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION – –, .
© COPYRIGHT – By – ALL RIGHTS RESERVED.

LOC	DIST
AF	50

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	G1	REVISED PER ECO-11-005027	11MAR11	RK	HMR

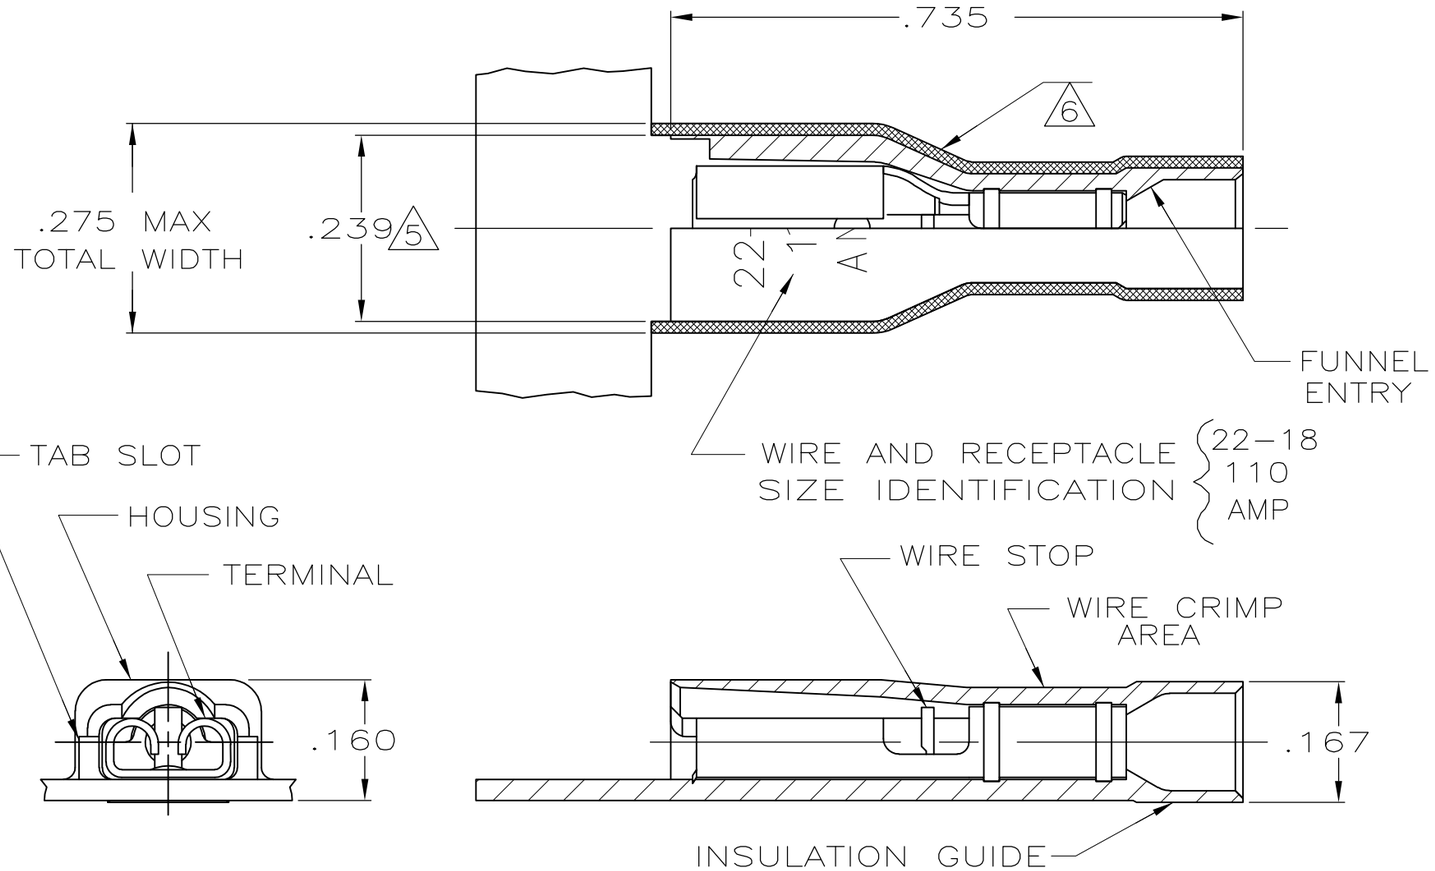

1 MATES WITH .020 # .001X.110 OR .125 TAB

2 WIRE STRIP LENGTH .281

3 INSULATION RANGE .060–.120

4 CONTINUOUS STRIP ON REELS

5 DIMENSION DOES NOT INCLUDE TRIM BURR

6 .015 MAX CARRIER TRIM BURR PER SIDE IS ALLOWABLE IN THE SHADED AREA

HOUSING:NYLON,COLOR–RED TRANSLUCENT

RECEPTACLE:#3 HARD BRASS
TIN PL .000080 MIN THK

MATERIAL & FINISH

2–520932–2

PART NO

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: INCHES

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC	± –
1 PLC	± –
2 PLC	± –
3 PLC	± .015
4 PLC	± –
ANGLES	± –

MATERIAL: SEE TABLE

FINISH: SEE TABLE

DWN	P FORTNEY	6/28/88
CHK	MS FEHER	7/6/88
APVD	K RANDOLPH	7/6/88
PRODUCT SPEC	108–2044	
APPLICATION SPEC	114–2123	
WEIGHT	–	

TE Connectivity

NAME: RECEPTACLE ASSEMBLY, ULTRA–FAST PLUS, .110/.125 SERIES, 22–18 AWG

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A3	00779	C–520932	–

CUSTOMER DRAWING

SCALE	SHEET	REV
5:1	1 OF 1	G1