

# Spread Aware™, Frequency Multiplier, and Zero Delay Buffer

## Features

- Spread Aware™ – designed to work with SSFTG reference signals
- 90 ps typical jitter OUT2
- 200 ps typical jitter OUT1
- 65 ps typical output-to-output skew
- 90 ps typical propagation delay
- Voltage range: 3.3 V  $\pm$  5%, or 5 V  $\pm$  10%
- Output frequency range: 20 MHz - 133 MHz
- Two outputs
- Configuration options allow various multiplication of the reference frequency, refer to [Configuration Options](#) to determine the specific option which meets your multiplication needs
- Available in 8-pin SOIC package


## Configuration Options

| FBIN | FS0 | FS1 | OUT1     | OUT2    |
|------|-----|-----|----------|---------|
| OUT1 | 0   | 0   | 2 X REF  | REF     |
| OUT1 | 1   | 0   | 4 X REF  | 2 X REF |
| OUT1 | 0   | 1   | REF      | REF/2   |
| OUT1 | 1   | 1   | 8 X REF  | 4 X REF |
| OUT2 | 0   | 0   | 4 X REF  | 2 X REF |
| OUT2 | 1   | 0   | 8 X REF  | 4 X REF |
| OUT2 | 0   | 1   | 2 X REF  | REF     |
| OUT2 | 1   | 1   | 16 X REF | 8 X REF |


## Functional Description

For a complete list of related documentation, click [here](#).

## Block Diagram

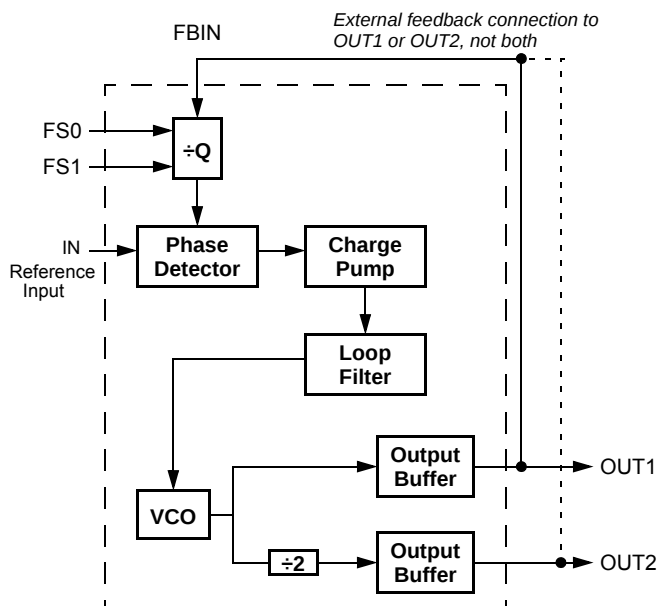

## Pin Configuration

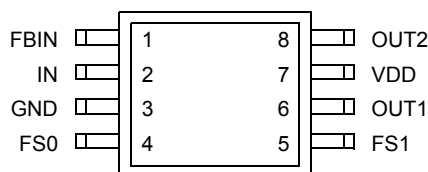

## Pin Definitions

| Pin Name        | Pin No. | Pin Type | Pin Description                                                                                                                                                                                                                                                                                                                                                            |
|-----------------|---------|----------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| IN              | 2       | I        | <b>Reference Input:</b> The output signals will be synchronized to this signal.                                                                                                                                                                                                                                                                                            |
| FBIN            | 1       | I        | <b>Feedback Input:</b> This input must be fed by one of the outputs (OUT1 or OUT2) to ensure proper functionality. If the trace between FBIN and the output pin being used for feedback is equal in length to the traces between the outputs and the signal destinations, then the signals received at the destinations will be synchronized to the REF signal input (IN). |
| OUT1            | 6       | O        | <b>Output 1:</b> The frequency of the signal provided by this pin is determined by the feedback signal connected to FBIN, and the FS0:1 inputs (see <a href="#">Table</a> ).                                                                                                                                                                                               |
| OUT2            | 8       | O        | <b>Output 2:</b> The frequency of the signal provided by this pin is one-half of the frequency of OUT1. See <a href="#">Table</a> .                                                                                                                                                                                                                                        |
| V <sub>DD</sub> | 7       | P        | <b>Power Connections:</b> Connect to 3.3 V or 5 V. This pin should be bypassed with a 0.1-μF decoupling capacitor. Use ferrite beads to help reduce noise for optimal jitter performance.                                                                                                                                                                                  |
| GND             | 3       | P        | <b>Ground Connection:</b> Connect all grounds to the common system ground plane.                                                                                                                                                                                                                                                                                           |
| FS0:1           | 4, 5    | I        | <b>Function Select Inputs:</b> Tie to VDD (HIGH, 1) or GND (LOW, 0) as desired per <a href="#">Table</a> .                                                                                                                                                                                                                                                                 |

## Overview

The CY23S02 is a two-output zero delay buffer and frequency multiplier. It provides an external feedback path allowing maximum flexibility when implementing the Zero Delay feature. This is explained further in the sections of this data sheet titled “How to Implement Zero Delay,” and “Inserting Other Devices in Feedback Path.”

The CY23S02 is a pin-compatible upgrade of the Cypress W42C70-01. The CY23S02 addresses some application dependent problems experienced by users of the older device. Most importantly, it addresses the tracking skew problem induced by a reference that has Spread Spectrum Timing enabled on it.

## Spread Aware

Many systems being designed now utilize a technology called spread spectrum frequency timing generation. Cypress has been one of the pioneers of SSFTG development, and we designed this product so as not to filter off the Spread Spectrum feature of the Reference input, assuming it exists. When a zero delay buffer is not designed to pass the SS feature through, the result is a significant amount of tracking skew which may cause problems in systems requiring synchronization.

For more details on Spread Spectrum timing technology, please see the Cypress application note titled, “EMI Suppression Techniques with Spread Spectrum Frequency Timing Generator (SSFTG) ICs.”

Referring to [Figure 2](#), if the traces between the ASIC/Buffer and the destination of the clock signal(s) (A) are equal in length to the trace between the buffer and the FBIN pin, the signals at the

In cases where OUT1 (i.e., the higher frequency output) is connected to FBIN input pin the output OUT2 rising edges may be either 0° or 180° phase aligned to the IN input waveform (as set randomly when the input and/or power is supplied). If OUT2 is desired to be rising-edge aligned to the IN input's rising edge, then connect the OUT2 (i.e., the lowest frequency output) to the FBIN pin. This setup provides a consistent input-output phase relationship.

## Absolute Maximum Ratings

Stresses greater than those listed in this table may cause permanent damage to the device. These represent a stress rating only. Operation of the device at these or any other conditions above those specified in the operating sections of this specification is not implied. Maximum conditions for extended periods may affect reliability.

| Parameter        | Description                            | Rating       | Unit |
|------------------|----------------------------------------|--------------|------|
| $V_{DD}, V_{IN}$ | Voltage on any pin with respect to GND | –0.5 to +7.0 | V    |
| $T_{STG}$        | Storage temperature                    | –65 to +150  | °C   |
| $T_A$            | Operating temperature                  | 0 to +70     | °C   |
| $T_B$            | Ambient temperature under bias         | –55 to +125  | °C   |
| $P_D$            | Power dissipation                      | 0.5          | W    |

## DC Electrical Characteristics

$T_A = 0\text{ °C to }70\text{ °C or }-40\text{ °C to }85\text{ °C}, V_{DD} = 3.3\text{ V} \pm 5\%$

| Parameter | Description         | Test Condition         | Min. | Typ. | Max. | Unit |
|-----------|---------------------|------------------------|------|------|------|------|
| $I_{DD}$  | Supply current      | Unloaded, 133 MHz      | –    | 17   | 35   | mA   |
| $V_{IL}$  | Input low voltage   |                        | –    | –    | 0.8  | V    |
| $V_{IH}$  | Input high voltage  |                        | 2.0  | –    | –    | V    |
| $V_{OL}$  | Output low voltage  | $I_{OL} = 8\text{ mA}$ | –    | –    | 0.4  | V    |
| $V_{OH}$  | Output high voltage | $I_{OH} = 8\text{ mA}$ | 2.4  | –    | –    | V    |
| $I_{IL}$  | Input low current   | $V_{IN} = 0\text{ V}$  | –40  | –    | 5    | μA   |
| $I_{IH}$  | Input high current  | $V_{IN} = V_{DD}$      | –    | –    | 5    | μA   |

## DC Electrical Characteristics

$T_A = 0\text{ °C to }70\text{ °C or }-40\text{ °C to }85\text{ °C}, V_{DD} = 5\text{ V} \pm 10\%$

| Parameter | Description         | Test Condition         | Min. | Typ. | Max. | Unit |
|-----------|---------------------|------------------------|------|------|------|------|
| $I_{DD}$  | Supply Current      | Unloaded, 133 MHz      | –    | 31   | 50   | mA   |
| $V_{IL}$  | Input Low Voltage   |                        | –    | –    | 0.8  | V    |
| $V_{IH}$  | Input High Voltage  |                        | 2.0  | –    | –    | V    |
| $V_{OL}$  | Output Low Voltage  | $I_{OL} = 8\text{ mA}$ | –    | –    | 0.4  | V    |
| $V_{OH}$  | Output High Voltage | $I_{OH} = 8\text{ mA}$ | 2.4  | –    | –    | V    |
| $I_{IL}$  | Input Low Current   | $V_{IN} = 0\text{ V}$  | –80  | –    | 5    | μA   |
| $I_{IH}$  | Input High Current  | $V_{IN} = V_{DD}$      | –    | –    | 5    | μA   |

## Thermal Resistance

| Parameter <sup>[1]</sup> | Description                              | Test Conditions                                                                                                             | 8-pin SOIC | Unit |
|--------------------------|------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------|------------|------|
| $\theta_{JA}$            | Thermal resistance (junction to ambient) | Test conditions follow standard test methods and procedures for measuring thermal impedance, in accordance with EIA/JESD51. | 132        | °C/W |
| $\theta_{JC}$            | Thermal resistance (junction to case)    |                                                                                                                             | 43         | °C/W |

### Note

1. These parameters are guaranteed by design and are not tested.

## AC Electrical Characteristics

$T_A = 0\text{ }^{\circ}\text{C}$  to  $+70\text{ }^{\circ}\text{C}$  or  $-40\text{ }^{\circ}\text{C}$  to  $85\text{ }^{\circ}\text{C}$ ,  $V_{DD} = 3.3\text{ V} \pm 5\%$

| Parameter  | Description                                         | Test Condition             | Min. | Typ. | Max. | Unit |
|------------|-----------------------------------------------------|----------------------------|------|------|------|------|
| $f_{IN}$   | Input frequency <sup>[2]</sup>                      | OUT2 = REF                 | 10   | —    | 133  | MHz  |
| $f_{OUT}$  | Output frequency                                    | OUT1                       | 20   | —    | 133  | MHz  |
| $t_R$      | Output rise time                                    | 0.8 V to 2.0 V, 15-pF load | —    | —    | 3.5  | ns   |
| $t_F$      | Output fall time                                    | 2.0 V to 0.8 V, 15-pF load | —    | —    | 2.5  | ns   |
| $t_{ICKR}$ | Input clock rise time <sup>[3]</sup>                |                            | —    | —    | 10   | ns   |
| $t_{ICLF}$ | Input clock fall time <sup>[3]</sup>                |                            | —    | —    | 10   | ns   |
| $t_{PD}$   | FBIN to IN (Reference Input) Skew <sup>[4, 5]</sup> |                            | —    | —    | 300  | ps   |
| $t_{DC}$   | Duty cycle <sup>[6]</sup>                           | Note 6                     | 40   | 50   | 60   | %    |
| $t_{LOCK}$ | PLL lock time                                       | Power supply stable        | —    | —    | 1.0  | ms   |
| $t_{JC}$   | Jitter, Cycle-to-Cycle <sup>[7]</sup>               | OUT1                       | —    | 200  | 300  | ps   |
|            |                                                     | OUT2                       | —    | 90   | 300  | ps   |
| $t_{SKEW}$ | Output-output Skew                                  |                            | —    | 65   | 250  | ps   |
| $t_{PD}$   | Propagation delay                                   |                            | –350 | 90   | 350  | ps   |

## AC Electrical Characteristics

$T_A = 0\text{ }^{\circ}\text{C}$  to  $+70\text{ }^{\circ}\text{C}$  or  $-40\text{ }^{\circ}\text{C}$  to  $85\text{ }^{\circ}\text{C}$ ,  $V_{DD} = 5\text{ V} \pm 10\%$

| Parameter  | Description                                         | Test Condition             | Min. | Typ. | Max. | Unit |
|------------|-----------------------------------------------------|----------------------------|------|------|------|------|
| $f_{IN}$   | Input frequency <sup>[2]</sup>                      | OUT2 = REF                 | 10   | —    | 133  | MHz  |
| $f_{OUT}$  | Output frequency                                    | OUT1                       | 20   | —    | 133  | MHz  |
| $t_R$      | Output rise time                                    | 0.8 V to 2.0 V, 15-pF load | —    | —    | 3.5  | ns   |
| $t_F$      | Output fall time                                    | 2.0 V to 0.8 V, 15-pF load | —    | —    | 2.5  | ns   |
| $t_{ICKR}$ | Input clock rise time <sup>[3]</sup>                |                            | —    | —    | 10   | ns   |
| $t_{ICLF}$ | Input clock fall time <sup>[3]</sup>                |                            | —    | —    | 10   | ns   |
| $t_{PD}$   | FBIN to IN (Reference Input) Skew <sup>[4, 5]</sup> |                            | —    | —    | 300  | ps   |
| $t_D$      | Duty cycle <sup>[8, 9]</sup>                        |                            | 40   | 50   | 60   | %    |
| $t_{LOCK}$ | PLL lock time                                       | Power supply stable        | —    | —    | 1.0  | ms   |
| $t_{JC}$   | Jitter, Cycle-to-Cycle <sup>[7]</sup>               | OUT1                       | —    | 200  | 300  | ps   |
|            |                                                     | OUT2                       | —    | 90   | 300  | ps   |
| $t_{SKEW}$ | Output-output skew                                  |                            | —    | 65   | 250  | ps   |
| $t_{PD}$   | Propagation delay                                   |                            | –350 | 90   | 350  | ps   |


### Notes

- Input frequency is limited by output frequency range and input to output frequency multiplication factor (that is determined by circuit configuration).
- Longer input rise and fall time will degrade skew and jitter performance.
- All AC specifications are measured with a 50  $\Omega$  transmission line, load terminated with 50  $\Omega$  to 1.4 V.
- Skew is measured at 1.4 V on rising edges.
- Duty cycle is measured at 1.4 V.
- Jitter is measured on 133-MHz signal at 1.4 V, low frequency jitter = 350 ps.
- Duty cycle is measured at 1.4 V, 120 MHz.
- Duty cycle at 133 MHz is 35/65 worst case.

## Ordering Information

| Ordering Code | Package Type                         | Temperature Grade           |
|---------------|--------------------------------------|-----------------------------|
| Pb-free       |                                      |                             |
| CY23S02SXI-1  | 8-pin SOIC (150 mil)                 | Industrial, -40 °C to 85 °C |
| CY23S02SXI-1T | 8-pin SOIC (150 mil) - Tape and Reel | Industrial, -40 °C to 85 °C |

## Ordering Code Definitions

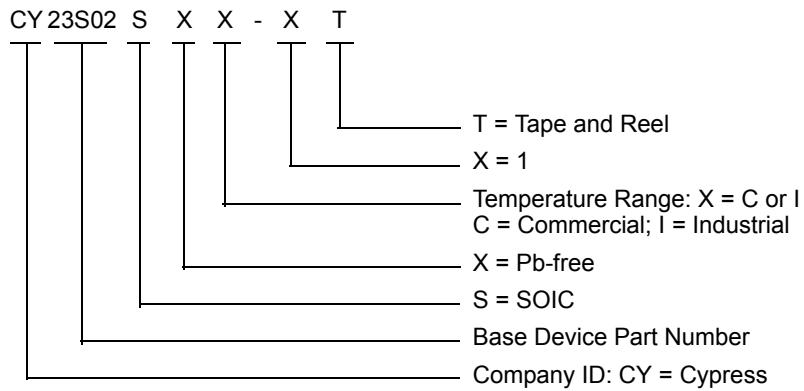


## Package Diagram

**Figure 3. 8-pin SOIC (150 Mils) S0815/SZ815/SW815 Package Outline, 51-85066**

1. DIMENSIONS IN INCHES[MM] MIN.  
MAX.
2. PIN 1 ID IS OPTIONAL,  
ROUND ON SINGLE LEADFRAME  
RECTANGULAR ON MATRIX LEADFRAME
3. REFERENCE JEDEC MS-012
4. PACKAGE WEIGHT 0.07gms

| PART #  |               |
|---------|---------------|
| S08.15  | STANDARD PKG  |
| SZ08.15 | LEAD FREE PKG |
| SW8.15  | LEAD FREE PKG |

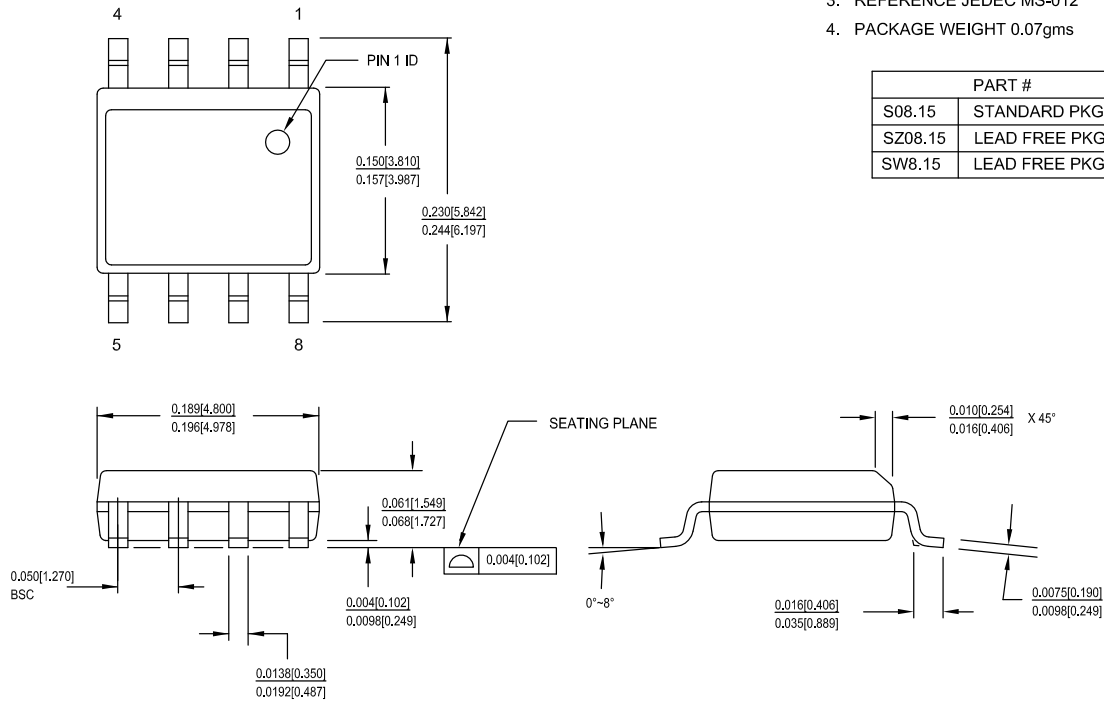

51-85066 \*H

## Acronyms

| Acronym | Description                                |
|---------|--------------------------------------------|
| ASIC    | application-specific integrated circuit    |
| EMI     | electromagnetic interference               |
| PLL     | phase-locked loop                          |
| SOIC    | small outline integrated circuit           |
| SSFTG   | Spread Spectrum Frequency Timing Generator |
| VCO     | voltage controlled oscillator              |
| ZDB     | zero delay buffer                          |

## Document Conventions

### Units of Measure

| Symbol | Unit of Measure |
|--------|-----------------|
| °C     | degree Celsius  |
| μA     | microampere     |
| mA     | milliampere     |
| ms     | millisecond     |
| MHz    | megahertz       |
| ns     | nanosecond      |
| pF     | picofarad       |
| ps     | picosecond      |
| V      | volt            |
| W      | watt            |

## Document History Page

| Document Title: CY23S02, Spread Aware™, Frequency Multiplier, and Zero Delay Buffer<br>Document Number: 38-07155 |         |            |                 |                                                                                                                                                                                                                    |
|------------------------------------------------------------------------------------------------------------------|---------|------------|-----------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Rev.                                                                                                             | ECN No. | Issue Date | Orig. of Change | Description of Change                                                                                                                                                                                              |
| **                                                                                                               | 110265  | 12/18/01   | SZV             | Change from Spec number: 38-00795 to 38-07155                                                                                                                                                                      |
| OBS                                                                                                              | 292037  | See ECN    | RGL             | To Obsolete the DS                                                                                                                                                                                                 |
| *B                                                                                                               | 348376  | See ECN    | RGL             | Minor Change: Re-activate the Spec (Only commercial are obsoleted, all industrial parts area still active).                                                                                                        |
| *C                                                                                                               | 378857  | See ECN    | RGL             | Updated <a href="#">Overview</a> :<br>Added <a href="#">Phase Alignment</a> .<br>Add typical char data.                                                                                                            |
| *D                                                                                                               | 2894970 | 03/23/2010 | KVM             | Updated <a href="#">Ordering Information</a> (Removed inactive parts).<br>Updated <a href="#">Package Diagram</a> .                                                                                                |
| *E                                                                                                               | 3339549 | 08/08/2011 | PURU            | Added <a href="#">Ordering Code Definitions</a> under <a href="#">Ordering Information</a> .<br>Updated <a href="#">Package Diagram</a> .<br>Added <a href="#">Acronyms</a> and <a href="#">Units of Measure</a> . |
| *F                                                                                                               | 4499739 | 09/11/2014 | TAVA            | Updated <a href="#">Package Diagram</a> :<br>spec 51-85066 – Changed revision from *E to *F.<br>Updated to new template.<br>Completing Sunset Review.                                                              |
| *G                                                                                                               | 4580603 | 11/26/2014 | TAVA            | Updated <a href="#">Functional Description</a> :<br>Added “For a complete list of related documentation, click <a href="#">here</a> .” at the end.                                                                 |
| *H                                                                                                               | 5276080 | 05/18/2016 | PSR             | Added <a href="#">Thermal Resistance</a> .<br>Updated <a href="#">Package Diagram</a> :<br>spec 51-85066 – Changed revision from *F to *H.<br>Updated to new template.                                             |

## Sales, Solutions, and Legal Information

### Worldwide Sales and Design Support

Cypress maintains a worldwide network of offices, solution centers, manufacturer's representatives, and distributors. To find the office closest to you, visit us at [Cypress Locations](#).

#### Products

|                               |                                                                    |
|-------------------------------|--------------------------------------------------------------------|
| ARM® Cortex® Microcontrollers | <a href="http://cypress.com/arm">cypress.com/arm</a>               |
| Automotive                    | <a href="http://cypress.com/automotive">cypress.com/automotive</a> |
| Clocks & Buffers              | <a href="http://cypress.com/clocks">cypress.com/clocks</a>         |
| Interface                     | <a href="http://cypress.com/interface">cypress.com/interface</a>   |
| Lighting & Power Control      | <a href="http://cypress.com/powerpsoc">cypress.com/powerpsoc</a>   |
| Memory                        | <a href="http://cypress.com/memory">cypress.com/memory</a>         |
| PSoC                          | <a href="http://cypress.com/psoc">cypress.com/psoc</a>             |
| Touch Sensing                 | <a href="http://cypress.com/touch">cypress.com/touch</a>           |
| USB Controllers               | <a href="http://cypress.com/usb">cypress.com/usb</a>               |
| Wireless/Rf                   | <a href="http://cypress.com/wireless">cypress.com/wireless</a>     |

#### PSoC® Solutions

[PSoC 1](#) | [PSoC 3](#) | [PSoC 4](#) | [PSoC 5LP](#)

#### Cypress Developer Community

[Forums](#) | [Projects](#) | [Video](#) | [Blogs](#) | [Training](#) | [Components](#)

#### Technical Support

[cypress.com/support](http://cypress.com/support)

© Cypress Semiconductor Corporation, 2005-2016. This document is the property of Cypress Semiconductor Corporation and its subsidiaries, including Spansion LLC ("Cypress"). This document, including any software or firmware included or referenced in this document ("Software"), is owned by Cypress under the intellectual property laws and treaties of the United States and other countries worldwide. Cypress reserves all rights under such laws and treaties and does not, except as specifically stated in this paragraph, grant any license under its patents, copyrights, trademarks, or other intellectual property rights. If the Software is not accompanied by a license agreement and you do not otherwise have a written agreement with Cypress governing the use of the Software, then Cypress hereby grants you a personal, non-exclusive, nontransferable license (without the right to sublicense) (1) under its copyright rights in the Software (a) for Software provided in source code form, to modify and reproduce the Software solely for use with Cypress hardware products, only internally within your organization, and (b) to distribute the Software in binary code form externally to end users (either directly or indirectly through resellers and distributors), solely for use on Cypress hardware product units, and (2) under those claims of Cypress's patents that are infringed by the Software (as provided by Cypress, unmodified) to make, use, distribute, and import the Software solely for use with Cypress hardware products. Any other use, reproduction, modification, translation, or compilation of the Software is prohibited.

TO THE EXTENT PERMITTED BY APPLICABLE LAW, CYPRESS MAKES NO WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, WITH REGARD TO THIS DOCUMENT OR ANY SOFTWARE OR ACCOMPANYING HARDWARE, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. To the extent permitted by applicable law, Cypress reserves the right to make changes to this document without further notice. Cypress does not assume any liability arising out of the application or use of any product or circuit described in this document. Any information provided in this document, including any sample design information or programming code, is provided only for reference purposes. It is the responsibility of the user of this document to properly design, program, and test the functionality and safety of any application made of this information and any resulting product. Cypress products are not designed, intended, or authorized for use as critical components in systems designed or intended for the operation of weapons, weapons systems, nuclear installations, life-support devices or systems, other medical devices or systems (including resuscitation equipment and surgical implants), pollution control or hazardous substances management, or other uses where the failure of the device or system could cause personal injury, death, or property damage ("Unintended Uses"). A critical component is any component of a device or system whose failure to perform can be reasonably expected to cause the failure of the device or system, or to affect its safety or effectiveness. Cypress is not liable, in whole or in part, and you shall and hereby do release Cypress from any claim, damage, or other liability arising from or related to all Unintended Uses of Cypress products. You shall indemnify and hold Cypress harmless from and against all claims, costs, damages, and other liabilities, including claims for personal injury or death, arising from or related to any Unintended Uses of Cypress products.

Cypress, the Cypress logo, Spansion, the Spansion logo, and combinations thereof, PSoC, CapSense, EZ-USB, F-RAM, and Traveo are trademarks or registered trademarks of Cypress in the United States and other countries. For a more complete list of Cypress trademarks, visit [cypress.com](http://cypress.com). Other names and brands may be claimed as property of their respective owners.