

# Mono/Stereo High-Power Class D Amplifier

## General Description

The MAX9736A/B/D Class D amplifiers provide high-performance, thermally efficient amplifier solutions. The MAX9736A delivers 2 x 15W into 8Ω loads, or 1 x 30W into a 4Ω load. The MAX9736B/D deliver 2 x 6W into 8Ω loads or 1 x 12W into a 4Ω load.

These devices operate from 8V to 28V and provide a high PSRR, eliminating the need for a regulated power supply. The MAX9736 offers up to 88% efficiency at 12V supply.

Pin-selectable modulation schemes select between filterless modulation and classic PWM modulation. Filterless modulation allows the MAX9736 to pass CE EMI limits with 1m cables using only a low-cost ferrite bead and capacitor on each output. Classic PWM modulation is optimized for best audio performance when using a full LC filter.

A pin-selectable stereo/mono mode allows stereo operation into 8Ω loads or mono operation into 4Ω loads. In mono mode, the right input op amp becomes available as a spare device, allowing flexibility in system design.

Comprehensive click-and-pop reduction circuitry minimizes noise coming into and out of shutdown or mute.

Input op amps allow the user to create summing amplifiers, lowpass or highpass filters, and select an optimal gain.

The MAX9736A/B/D are available in 32-pin TQFN packages and specified over the -40°C to +85°C temperature range.

## Features

- ♦ Wide 8V to 28V Supply Voltage Range
- ♦ Spread-Spectrum Modulation Enables Low EMI Solution
- ♦ Passes CE EMI Limits with Low-Cost Ferrite Bead/Capacitor Filter
- ♦ Low BOM Cost
- ♦ High 67dB PSRR at 1kHz Reduces Supply Cost
- ♦ 88% Efficiency Eliminates Heatsink
- ♦ Thermal and Output Current Protection
- ♦ < 1μA Shutdown Mode
- ♦ Mute Function
- ♦ Space-Saving, 32-Pin TQFN Packages, 7mm x 7mm x 0.8mm (MAX9736A/B), 5mm x 5mm x 0.8mm (MAX9736D)

## Applications

LCD/PDP/CRT Monitors  
LCD/PDP/CRT TVs  
MP3 Docking Stations

Notebook PCs  
PC Speakers  
All-in-One PCs

## Ordering Information

| PART         | STEREO/MONO<br>OUTPUT POWER | PIN-PACKAGE              |
|--------------|-----------------------------|--------------------------|
| MAX9736AETJ+ | 2 x 15W/<br>1 x 30W         | 32 TQFN-EP*<br>7mm x 7mm |


**Note:** All devices are specified over the -40°C to +85°C operating temperature range.

+ Denotes a lead(Pb)-free/RoHS-compliant package.

\*EP = Exposed pad.

Ordering Information continued at end of data sheet.

## Simplified Diagram

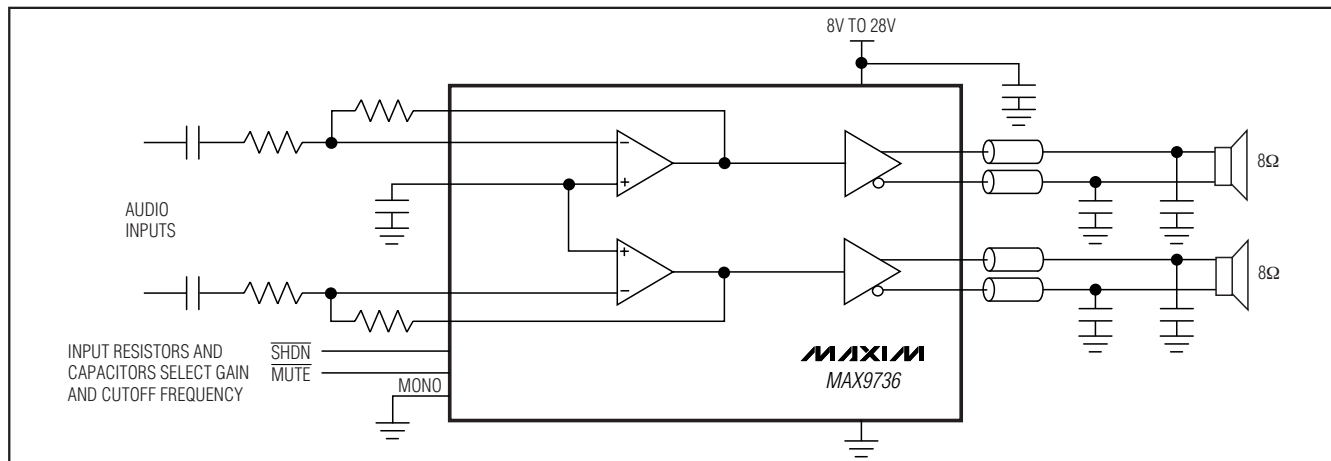

# Mono/Stereo High-Power Class D Amplifier

## ABSOLUTE MAXIMUM RATINGS

|                                                              |                                                  |
|--------------------------------------------------------------|--------------------------------------------------|
| PVDD to PGND                                                 | .....-0.3V to +30V                               |
| AGND to PGND                                                 | .....-0.3V to +0.3V                              |
| INL, INR, FBL, FBR, COM to AGND                              | .....-0.3V to (V <sub>REG</sub> + 0.3V)          |
| MUTE, SHDN, MONO, MOD, REGEN to AGND                         | .....-0.3V to +6V                                |
| REG to AGND                                                  | .....-0.3V to (VS + 0.3V)                        |
| VS to AGND (Note 1)                                          | .....-0.3V to +6V                                |
| OUTL+, OUTL-, OUTR+,<br>OUTR-, to PGND                       | .....-0.3V to (PVDD + 0.3V)                      |
| C1N to PGND                                                  | .....-0.3V to (PVDD + 0.3V)                      |
| C1P to PGND                                                  | .....(PVDD - 0.3V) to (V <sub>BOOT</sub> + 0.3V) |
| BOOT to PGND                                                 | .....(V <sub>C1P</sub> - 0.3V) to PVDD + 12V     |
| OUTL+, OUTL-, OUTR+, OUTR-,<br>Short Circuit to PGND or PVDD | .....Continuous                                  |
| Thermal Limits (Notes 2, 3)                                  |                                                  |

|                                                                            |                      |
|----------------------------------------------------------------------------|----------------------|
| Continuous Power Dissipation (T <sub>A</sub> = +70°C)                      |                      |
| 32-Pin TQFN 5mm x 5mm Multiple Layer PCB<br>(derate 34.5mW/°C above +70°C) | .....2.76W           |
| θ <sub>JA</sub>                                                            | .....29°C/W          |
| θ <sub>JC</sub>                                                            | .....2°C/W           |
| Continuous Power Dissipation (T <sub>A</sub> = +70°C)                      |                      |
| 32-Pin TQFN 7mm x 7mm Multiple Layer PCB<br>(derate 37mW/°C above +70°C)   | .....2.96W           |
| θ <sub>JA</sub>                                                            | .....27°C/W          |
| θ <sub>JC</sub>                                                            | .....1°C/W           |
| Operating Temperature Range                                                | .....-40°C to +85°C  |
| Storage Temperature Range                                                  | .....-65°C to +150°C |
| Junction Temperature                                                       | .....+150°C          |
| Lead Temperature (soldering, 10s)                                          | .....+300°C          |

**Note 1:** VS cannot exceed PVDD + 0.3V. See the *Power Sequencing* section.

**Note 2:** Thermal performance of this device is highly dependant on PCB layout. See the *Applications Information* section for more details.

**Note 3:** Package thermal resistances were obtained using the method described in JEDEC specification JESD51-7, using a 4-layer board. For detailed information on package thermal considerations, visit [www.maxim-ic.com/thermal-tutorial](http://www.maxim-ic.com/thermal-tutorial).

Stresses beyond those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated in the operational sections of the specifications is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

## ELECTRICAL CHARACTERISTICS

(V<sub>PVDD</sub> = 20V, V<sub>VS</sub> = 5V, V<sub>AGND</sub> = V<sub>PGND</sub> = 0V, V<sub>MOD</sub> = V<sub>SHDN</sub> = V<sub>MUTE</sub> = 5V, REGEN = MONO = AGND, C1 = 0.1μF, C2 = 1μF, R<sub>INL</sub> = 20kΩ and R<sub>FBL</sub> = 20kΩ, R<sub>L</sub> = ∞, AC measurement bandwidth 22Hz to 22kHz, T<sub>A</sub> = T<sub>MIN</sub> to T<sub>MAX</sub>, unless otherwise noted. Typical values are at T<sub>A</sub> = +25°C.) (Notes 4, 5)

| PARAMETER                         | SYMBOL | CONDITIONS                             |                   | MIN | TYP  | MAX | UNITS |
|-----------------------------------|--------|----------------------------------------|-------------------|-----|------|-----|-------|
| AMPLIFIER DC CHARACTERISTICS      |        |                                        |                   |     |      |     |       |
| Speaker Supply Voltage Range      | PVDD   | Inferred from PSRR test                |                   | 8   |      | 28  | V     |
| Preamplifier Supply Voltage Range | VS     | (Notes 1 and 7)                        |                   | 4.5 |      | 5.5 | V     |
| Undervoltage Lockout              | UVLO   |                                        |                   | 7   |      |     | V     |
| Quiescent Supply Current          | IPVDD  | RL = ∞, VREGEN = 5V, VVS = open        | TA = +25°C        | 30  | 45   |     | mA    |
|                                   |        |                                        | TA = TMIN to TMAX | 50  |      |     |       |
|                                   | IVS    | RL = ∞, VREGEN = 0V, VVS = 5V          | TA = +25°C        | 14  | 20   |     | mA    |
|                                   |        |                                        | TA = TMIN to TMAX | 22  |      |     |       |
| Shutdown Supply Current           | ISHDN  | VSHDN = 0V                             | IPVDD             | 1   | 10   |     | μA    |
|                                   |        |                                        | IVS               | 10  |      |     |       |
| REG Voltage                       | VREG   |                                        |                   | 4.2 |      |     | V     |
| Preregulator Voltage              | VS     | Internal regulated 5V, VREGEN = 5V     |                   | 4.8 |      |     | V     |
| COM Voltage                       | VCOM   |                                        |                   | 1.9 | 2.05 | 2.2 | V     |
| INPUT AMPLIFIER CHARACTERISTICS   |        |                                        |                   |     |      |     |       |
| Capacitive Drive                  | CL     |                                        |                   | 30  |      |     | pF    |
| Output Swing (Note 6)             |        | Sinking ±1mA                           |                   | ±2  |      |     | V     |
| Open-Loop Gain                    | AVO    | VFB_ = VCOM ±500mV, RFB_ = 20kΩ to IN_ |                   | 88  |      |     | dB    |
| Input Offset Voltage              | VOS    |                                        |                   | ±1  |      |     | mV    |

# Mono/Stereo High-Power Class D Amplifier

## ELECTRICAL CHARACTERISTICS (continued)

(VPVDD = 20V, VVS = 5V, VAGND = VPGND = 0V, VMOD = VSHDN = VMUTE = 5V, REGEN = MONO = AGND, C1 = 0.1μF, C2 = 1μF, RINL = 20kΩ and RFB = 20kΩ, RL = ∞, AC measurement bandwidth 22Hz to 22kHz, TA = TMIN to TMAX, unless otherwise noted. Typical values are at TA = +25°C.) (Notes 4, 5)

| PARAMETER                            | SYMBOL               | CONDITIONS                               |                         |                     | MIN                 | TYP  | MAX  | UNITS |
|--------------------------------------|----------------------|------------------------------------------|-------------------------|---------------------|---------------------|------|------|-------|
| Input Amplifier Slew Rate            |                      |                                          |                         |                     |                     | 2.5  |      | V/μs  |
| Input Amplifier Unity-Gain Bandwidth |                      |                                          |                         |                     |                     | 3.5  |      | MHz   |
| AMPLIFIER CHARACTERISTICS            |                      |                                          |                         |                     |                     |      |      |       |
| Output Amplifier Gain (Note 8)       | A <sub>v</sub>       | MAX9736A, MAX9736D                       |                         |                     | 16.5                | 17   | 17.5 | dB    |
|                                      |                      | MAX9736B                                 |                         |                     | 13.1                | 13.6 | 14.1 |       |
| Output Current Limit                 |                      |                                          |                         |                     | 3.3                 | 4.6  |      | A     |
| Output Offset                        | V <sub>OS</sub>      | OUT_+ to OUT_-, T <sub>A</sub> = +25°C   |                         |                     |                     | ±2   | ±10  | mV    |
| Power-Supply Rejection Ratio         | PSRR                 | PVDD = 8V to 28V, T <sub>A</sub> = +25°C |                         |                     | 65                  | 80   |      | dB    |
|                                      |                      | f = 1kHz, 100mV <sub>p-p</sub> ripple    |                         |                     |                     | 67   |      |       |
| MAX9736A Output Power (THD+N = 1%)   | P <sub>OUT_1%</sub>  | V <sub>PVDD</sub> = 12V                  | Stereo                  | R <sub>L</sub> = 8Ω | 8                   |      | W    |       |
|                                      |                      |                                          |                         | R <sub>L</sub> = 4Ω | 13                  |      |      |       |
|                                      |                      |                                          | Mono                    | R <sub>L</sub> = 4Ω | 15.5                |      |      |       |
|                                      |                      | V <sub>PVDD</sub> = 18V                  |                         | Stereo              | R <sub>L</sub> = 8Ω | 13.5 |      |       |
|                                      |                      |                                          | R <sub>L</sub> = 4Ω     |                     | 27                  |      |      |       |
|                                      |                      |                                          | V <sub>PVDD</sub> = 24V | Stereo              | R <sub>L</sub> = 8Ω | 13.5 |      |       |
| R <sub>L</sub> = 4Ω                  | 27                   |                                          |                         |                     |                     |      |      |       |
| MAX9736B Output Power (THD+N = 1%)   | P <sub>OUT_1%</sub>  | V <sub>PVDD</sub> = 12V                  | Stereo                  | R <sub>L</sub> = 8Ω | 6                   |      | W    |       |
|                                      |                      |                                          |                         | R <sub>L</sub> = 4Ω | 11                  |      |      |       |
|                                      |                      |                                          | Mono                    | R <sub>L</sub> = 4Ω | 12                  |      |      |       |
|                                      |                      | V <sub>PVDD</sub> = 18V                  |                         | Stereo              | R <sub>L</sub> = 8Ω | 6    |      |       |
|                                      |                      |                                          | R <sub>L</sub> = 4Ω     |                     | 12                  |      |      |       |
|                                      |                      | V <sub>PVDD</sub> = 24V                  | Stereo                  | R <sub>L</sub> = 8Ω | 6                   |      |      |       |
| R <sub>L</sub> = 4Ω                  | 12                   |                                          |                         |                     |                     |      |      |       |
| MAX9736A Output Power (THD+N = 10%)  | P <sub>OUT_10%</sub> | V <sub>PVDD</sub> = 12V                  | Stereo                  | R <sub>L</sub> = 8Ω | 10                  |      | W    |       |
|                                      |                      |                                          |                         | R <sub>L</sub> = 4Ω | 16                  |      |      |       |
|                                      |                      |                                          | Mono                    | R <sub>L</sub> = 4Ω | 19.5                |      |      |       |
|                                      |                      | V <sub>PVDD</sub> = 18V                  |                         | Stereo              | R <sub>L</sub> = 8Ω | 17.5 |      |       |
|                                      |                      |                                          | R <sub>L</sub> = 4Ω     |                     | 35                  |      |      |       |
|                                      |                      | V <sub>PVDD</sub> = 24V                  | Stereo                  | R <sub>L</sub> = 8Ω | 17.5                |      |      |       |
| R <sub>L</sub> = 4Ω                  | 35                   |                                          |                         |                     |                     |      |      |       |
| MAX9736B Output Power (THD+N = 10%)  | P <sub>OUT_10%</sub> | V <sub>PVDD</sub> = 12V                  | Stereo                  | R <sub>L</sub> = 8Ω | 7.5                 |      | W    |       |
|                                      |                      |                                          |                         | R <sub>L</sub> = 4Ω | 14                  |      |      |       |
|                                      |                      |                                          | Mono                    | R <sub>L</sub> = 4Ω | 15                  |      |      |       |
|                                      |                      | V <sub>PVDD</sub> = 18V                  |                         | Stereo              | R <sub>L</sub> = 8Ω | 7.5  |      |       |
|                                      |                      |                                          | R <sub>L</sub> = 4Ω     |                     | 15                  |      |      |       |
|                                      |                      | V <sub>PVDD</sub> = 24V                  | Stereo                  | R <sub>L</sub> = 8Ω | 7.5                 |      |      |       |
| R <sub>L</sub> = 4Ω                  | 15                   |                                          |                         |                     |                     |      |      |       |

# Mono/Stereo High-Power Class D Amplifier

## ELECTRICAL CHARACTERISTICS (continued)

(VPVDD = 20V, VVS = 5V, VAGND = VPGND = 0V, VMOD = VSHDN = VMUTE = 5V, REGEN = MONO = AGND, C1 = 0.1μF, C2 = 1μF, RINL = 20kΩ and RFB = 20kΩ, RL = ∞, AC measurement bandwidth 22Hz to 22kHz, TA = TMIN to TMAX, unless otherwise noted. Typical values are at TA = +25°C.) (Notes 4, 5)

| PARAMETER                                    | SYMBOL | CONDITIONS                                                      |                                | MIN     | TYP  | MAX | UNITS |
|----------------------------------------------|--------|-----------------------------------------------------------------|--------------------------------|---------|------|-----|-------|
| MAX9736D Output Power<br>(Thermally Limited) |        | VPVDD = 12V                                                     | Stereo                         | RL = 8Ω | 8.5  |     | W     |
|                                              |        |                                                                 | Mono                           | RL = 4Ω | 17   |     |       |
|                                              |        | VPVDD = 18V                                                     | Stereo                         | RL = 8Ω | 5.5  |     |       |
|                                              |        |                                                                 | Mono                           | RL = 4Ω | 11   |     |       |
|                                              |        | VPVDD = 24V                                                     | Stereo                         | RL = 8Ω | 3.5  |     |       |
|                                              |        |                                                                 | Mono                           | RL = 4Ω | 7    |     |       |
| Total Harmonic Distortion Plus Noise         | THD+N  | MAX9736A, POUT = 4W, f = 1kHz, PWM modulation mode, RL = 8Ω     |                                |         | 0.04 |     | %     |
|                                              |        | MAX9736B/D, POUT = 2W, f = 1kHz, PWM modulation mode, RL = 8Ω   |                                |         | 0.04 |     |       |
| Signal-to-Noise Ratio                        | SNR    | A-weighted                                                      | MAX9736A/D, POUT = 8W, RL = 8Ω |         | 96.5 |     | dB    |
|                                              |        |                                                                 | MAX9736B, POUT = 6W, RL = 8Ω   |         | 97   |     |       |
| Noise                                        | VN     | A-weighted<br>(Note 9)                                          | MAX9736A/D                     |         | 120  |     | μVRMS |
|                                              |        |                                                                 | MAX9736B                       |         | 100  |     |       |
| Crosstalk                                    |        | L to R, R to L, POUT = 1W, f = 1kHz, RL = 8Ω                    |                                |         | 100  |     | dB    |
| Efficiency                                   | η      | POUT = 8W, MAX9736A, PVDD = 12V, RL = 8Ω                        |                                |         | 88   |     | %     |
| Click-and-Pop Level                          | KCP    | Peak voltage, 32 samples/second, A-weighted<br>(Notes 9 and 10) | Into mute                      |         | 36   |     | dBV   |
|                                              |        |                                                                 | Out of mute                    |         | 36   |     |       |
| Switching Frequency                          |        |                                                                 |                                | 270     | 300  | 330 | kHz   |
| Spread-Spectrum Bandwidth                    |        |                                                                 |                                |         | ±4   |     | kHz   |
| Thermal Shutdown Level                       |        |                                                                 |                                |         | 160  |     | °C    |
| Thermal Shutdown Hysteresis                  |        |                                                                 |                                |         | 30   |     | °C    |
| Turn-On Time                                 | tON    |                                                                 |                                |         | 110  |     | ms    |

# Mono/Stereo High-Power Class D Amplifier

## ELECTRICAL CHARACTERISTICS (continued)

(V<sub>PVDD</sub> = 20V, V<sub>VS</sub> = 5V, V<sub>AGND</sub> = V<sub>PGND</sub> = 0V, V<sub>MOD</sub> = V<sub>SHDN</sub> = V<sub>MUTE</sub> = 5V, REGEN = MONO = AGND, C1 = 0.1μF, C2 = 1μF, R<sub>INL</sub> = 20kΩ and R<sub>FB</sub> = 20kΩ, R<sub>L</sub> = ∞, AC measurement bandwidth 22Hz to 22kHz, T<sub>A</sub> = T<sub>MIN</sub> to T<sub>MAX</sub>, unless otherwise noted. Typical values are at T<sub>A</sub> = +25°C.) (Notes 4, 5)

| PARAMETER                | SYMBOL           | CONDITIONS | MIN | TYP | MAX | UNITS |
|--------------------------|------------------|------------|-----|-----|-----|-------|
| <b>DIGITAL INTERFACE</b> |                  |            |     |     |     |       |
| Input Voltage High       | V <sub>INH</sub> |            | 2   |     |     | V     |
| Input Voltage Low        | V <sub>INL</sub> |            |     |     | 0.8 | V     |
| Input Voltage Hysteresis |                  |            |     | 50  |     | mV    |
| Input Leakage Current    |                  |            |     |     | ±10 | μA    |

**Note 4:** All devices are 100% production tested at +25°C. All temperature limits are guaranteed by design.

**Note 5:** Stereo mode (MONO = GND) specified with 8Ω resistive load in series with a 68μH inductive load connected across BTL outputs. Mono mode (MONO = 5V) specified with a 4Ω resistive load in series with a 33μH inductive load connected across BTL outputs.

**Note 6:** Output swing is specified with respect to V<sub>COM</sub>.

**Note 7:** For typical applications, an external 5V supply is not required. Therefore, set REGEN = 5V. If thermal performance is a concern, set REGEN = 0V and provide an external regulated 5V supply.

**Note 8:** Output amplifier gain is defined as:

$$20 \times \log \left( \frac{|(V_{OUT\_+}) - (V_{OUT\_+})|}{|V_{FB\_}|} \right)$$

**Note 9:** Amplifier inputs AC-coupled to GND.


**Note 10:** Specified at room temperature with an 8Ω resistive load in series with a 68μH inductive load connected across BTL outputs. Mode transitions controlled by SHDN control pin.

# Mono/Stereo High-Power Class D Amplifier


## Typical Operating Characteristics

(MAX9736A,  $V_{PVD}$  = 12V, MOD = high, spread-spectrum modulation mode,  $V_{GND}$  =  $V_{PGND}$  = 0V,  $V_{SHDN}$  =  $V_{MUTE}$  = 5V, unless otherwise noted.)


**TOTAL HARMONIC DISTORTION PLUS NOISE vs. FREQUENCY**

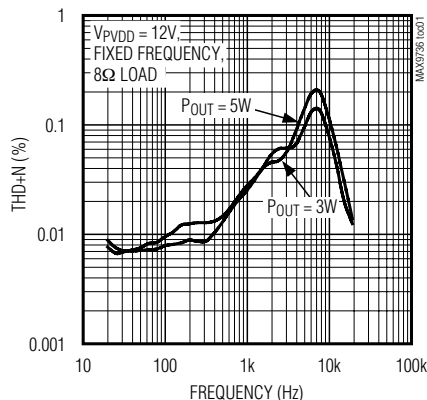


**TOTAL HARMONIC DISTORTION PLUS NOISE vs. FREQUENCY**

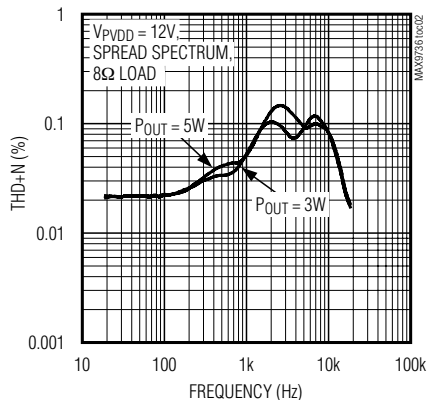


**TOTAL HARMONIC DISTORTION PLUS NOISE vs. FREQUENCY**

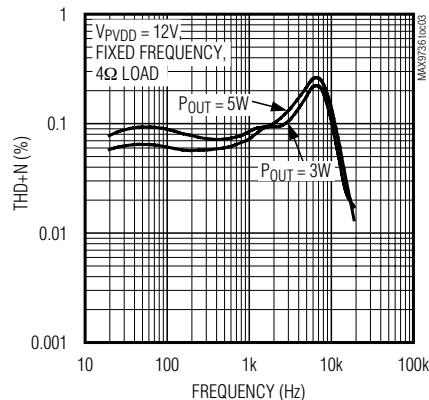


**TOTAL HARMONIC DISTORTION PLUS NOISE vs. FREQUENCY**

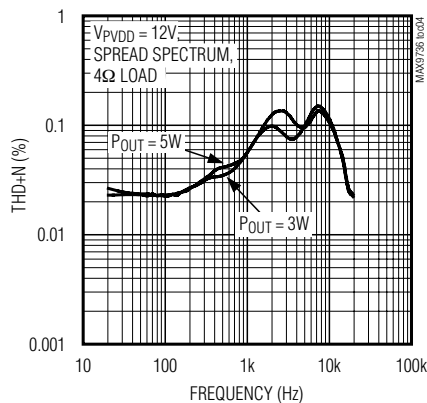


**TOTAL HARMONIC DISTORTION PLUS NOISE vs. OUTPUT POWER**

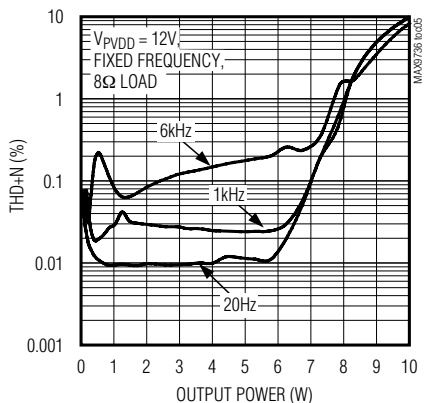


**TOTAL HARMONIC DISTORTION PLUS NOISE vs. OUTPUT POWER**

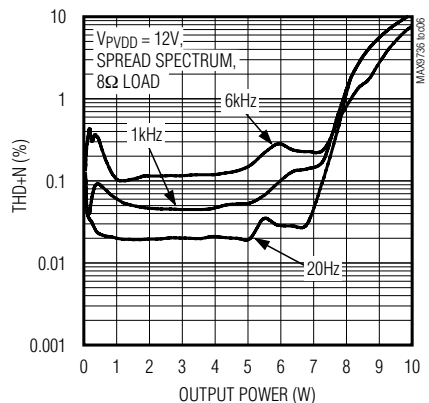


**TOTAL HARMONIC DISTORTION PLUS NOISE vs. OUTPUT POWER**

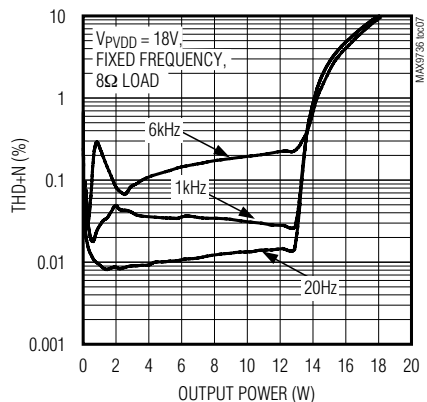

**TOTAL HARMONIC DISTORTION PLUS NOISE vs. OUTPUT POWER**

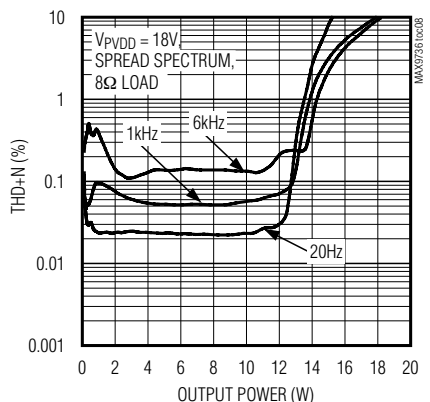

**TOTAL HARMONIC DISTORTION PLUS NOISE vs. OUTPUT POWER**

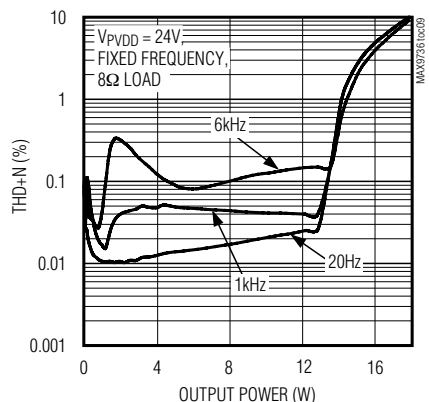


# Mono/Stereo High-Power Class D Amplifier


## Typical Operating Characteristics (continued)

(MAX9736A,  $V_{PVDD} = 12V$ , MOD = high, spread-spectrum modulation mode,  $V_{GND} = V_{PGND} = 0V$ ,  $V_{SHDN} = V_{MUTE} = 5V$ , unless otherwise noted.)


**TOTAL HARMONIC DISTORTION PLUS NOISE vs. OUTPUT POWER**

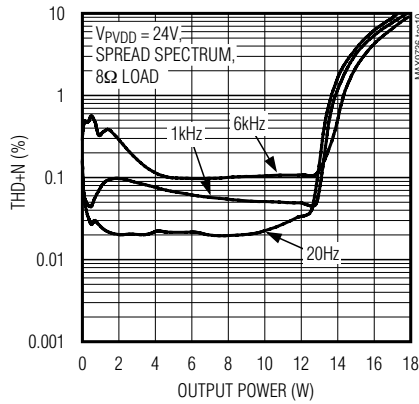


**TOTAL HARMONIC DISTORTION PLUS NOISE vs. OUTPUT POWER**

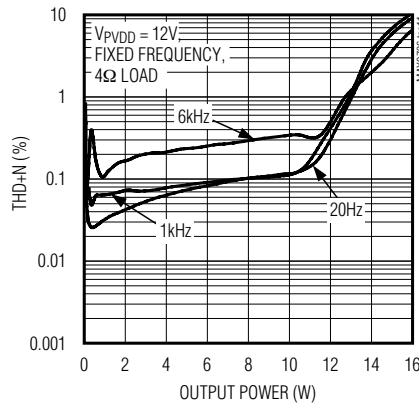


**TOTAL HARMONIC DISTORTION PLUS NOISE vs. OUTPUT POWER**

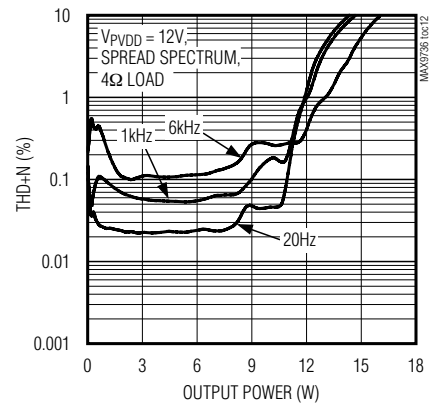


**EFFICIENCY vs. TOTAL OUTPUT POWER**

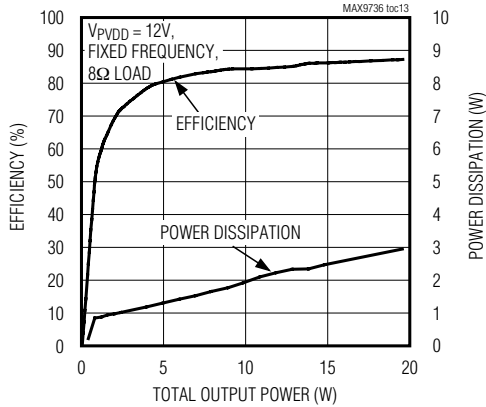


**EFFICIENCY vs. TOTAL OUTPUT POWER**

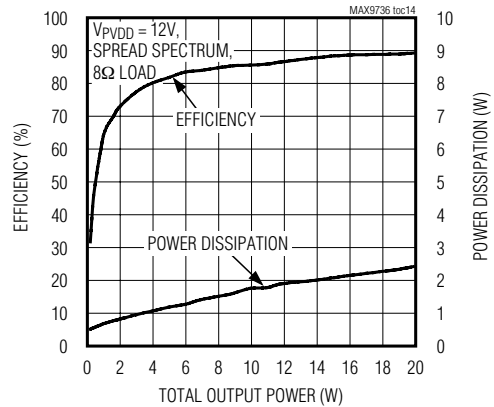

**EFFICIENCY vs. TOTAL OUTPUT POWER**

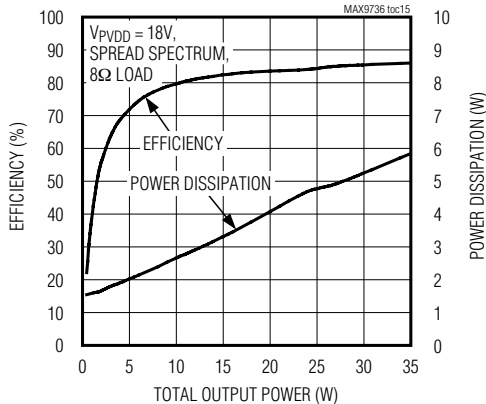








**EFFICIENCY vs. TOTAL OUTPUT POWER**

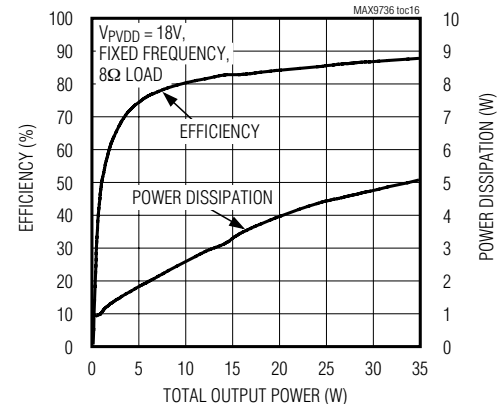

# Mono/Stereo High-Power Class D Amplifier

## Typical Operating Characteristics (continued)

(MAX9736A,  $V_{PVDD} = 12V$ , MOD = high, spread-spectrum modulation mode,  $V_{GND} = V_{PGND} = 0V$ ,  $V_{SHDN} = V_{MUTE} = 5V$ , unless otherwise noted.)

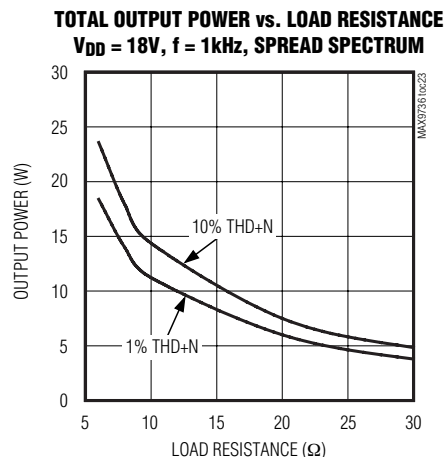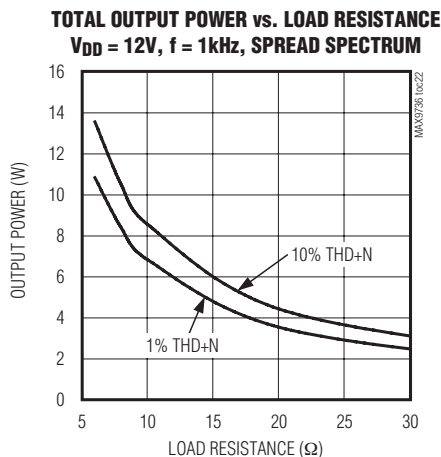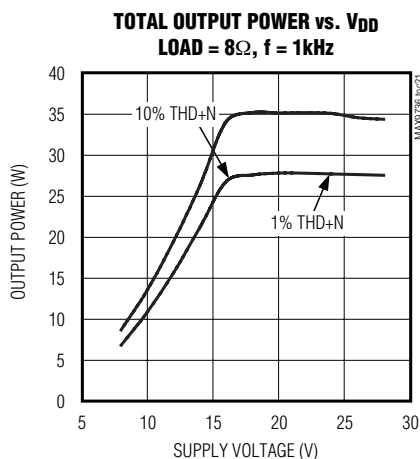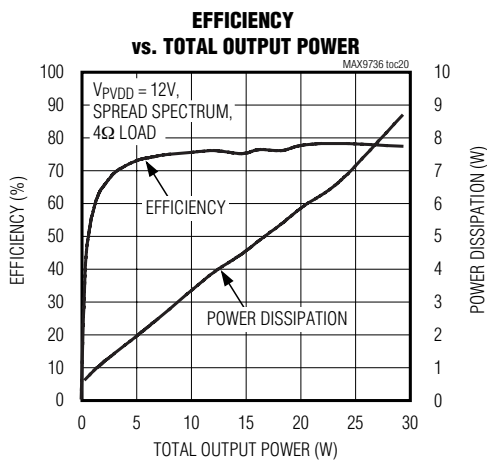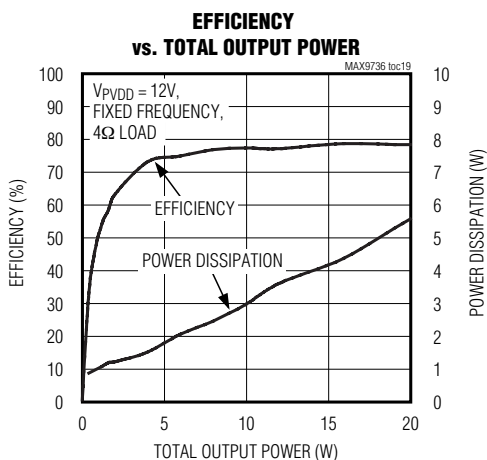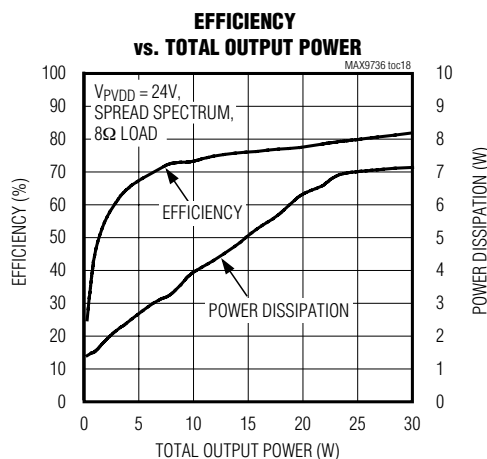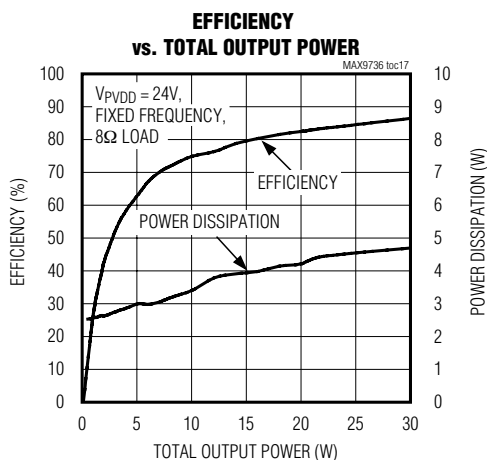


# Mono/Stereo High-Power Class D Amplifier


## Typical Operating Characteristics (continued)

(MAX9736A,  $V_{PVD}$  = 12V, MOD = high, spread-spectrum modulation mode,  $V_{GND}$  =  $V_{PGND}$  = 0V,  $V_{SHDN}$  =  $V_{MUTE}$  = 5V, unless otherwise noted.)


**TOTAL OUTPUT POWER vs. LOAD RESISTANCE**

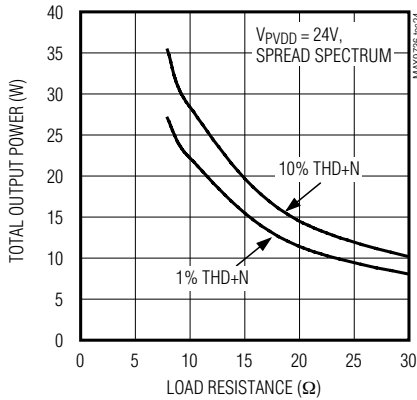


**POWER-SUPPLY REJECTION RATIO vs. FREQUENCY**

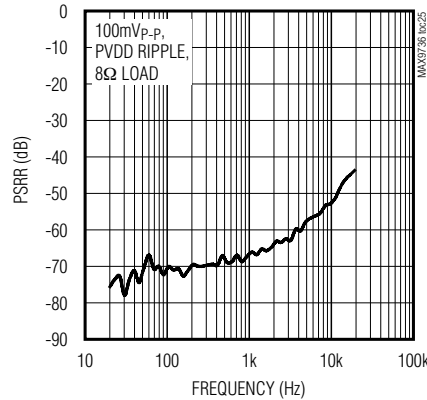


**CROSSTALK vs. FREQUENCY**

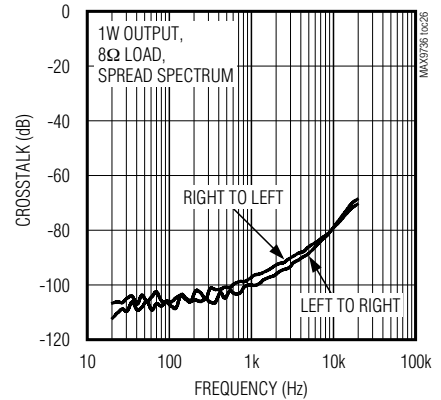


**TOTAL HARMONIC DISTORTION PLUS NOISE vs. OUTPUT POWER**

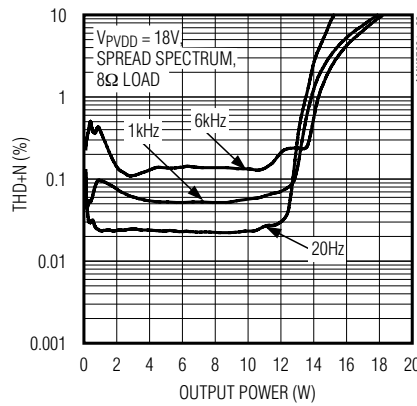


**INBAND OUTPUT SPECTRUM**

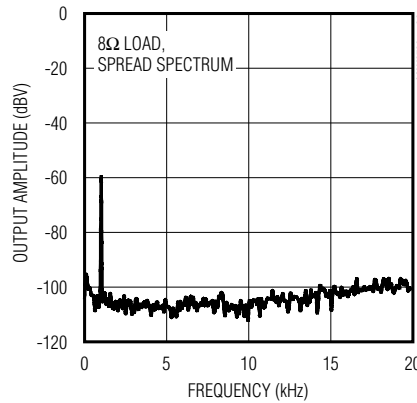


**WIDEBAND OUTPUT SPECTRUM**

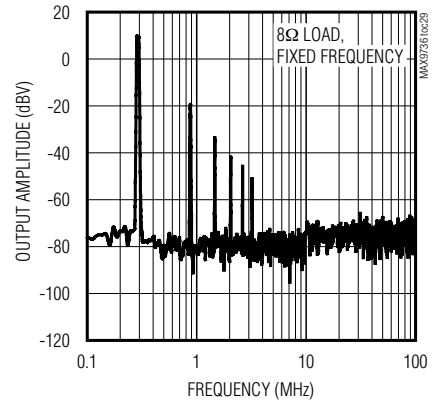


**WIDEBAND OUTPUT SPECTRUM**

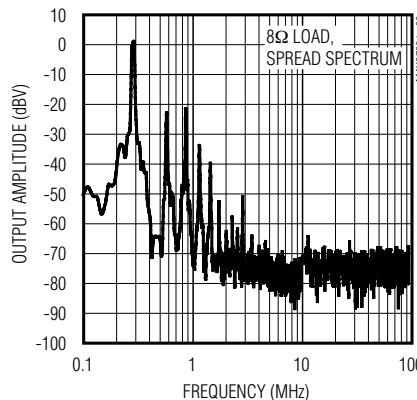

**SHDN ON/OFF-RESPONSE**

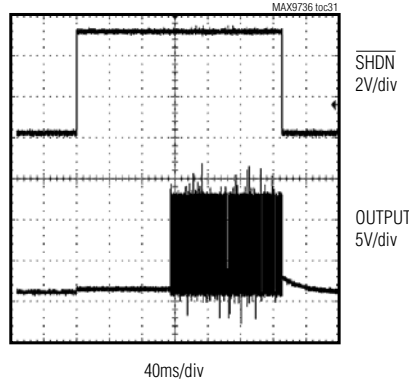









**MUTE ON/OFF-RESPONSE**

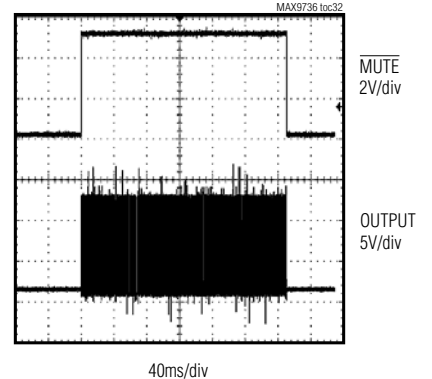

# Mono/Stereo High-Power Class D Amplifier

## Typical Operating Characteristics (continued)








(MAX9736A,  $V_{PDD} = 12V$ , MOD = high, spread-spectrum modulation mode,  $V_{GND} = V_{PGND} = 0V$ ,  $V_{SHDN} = V_{MUTE} = 5V$ , unless otherwise noted.)

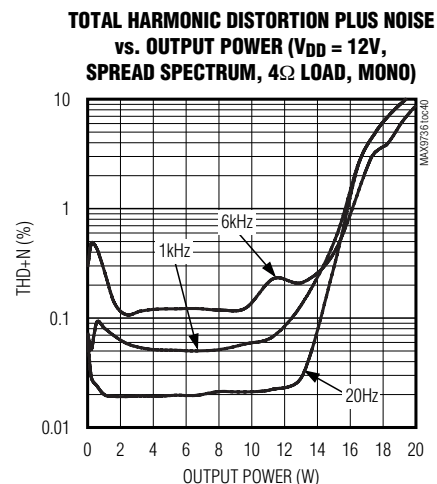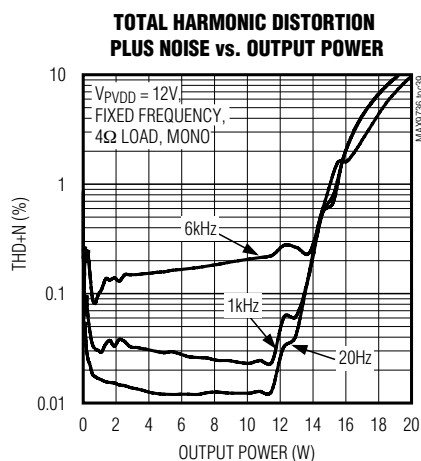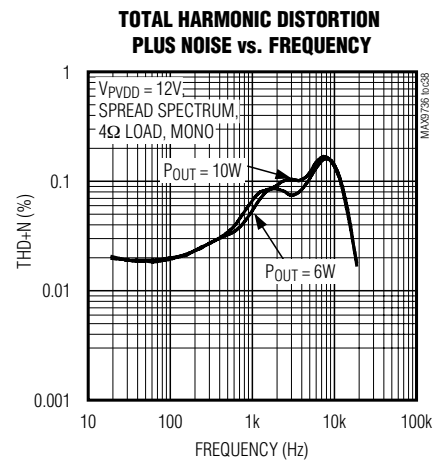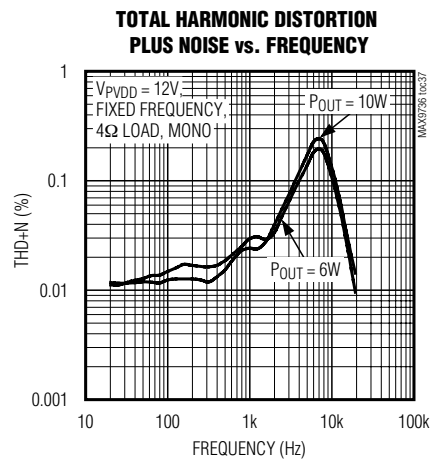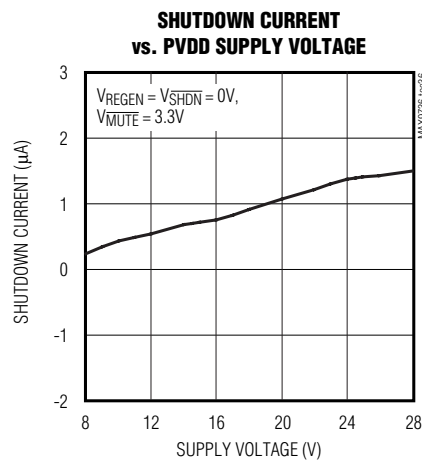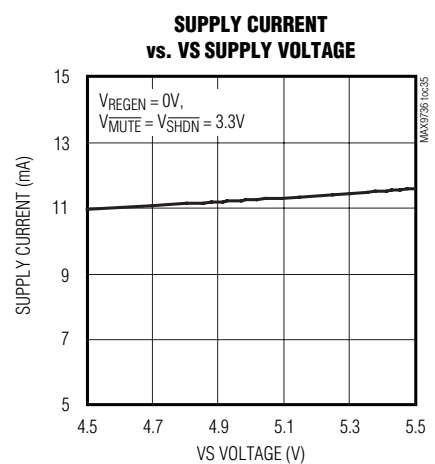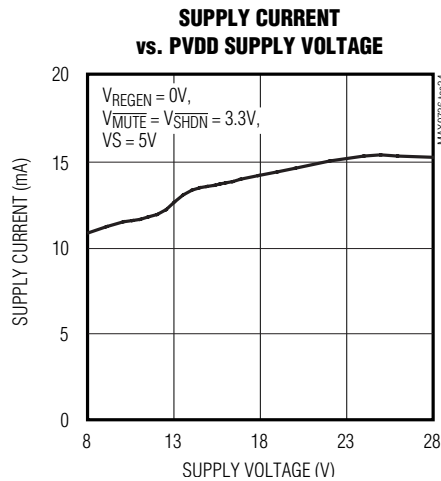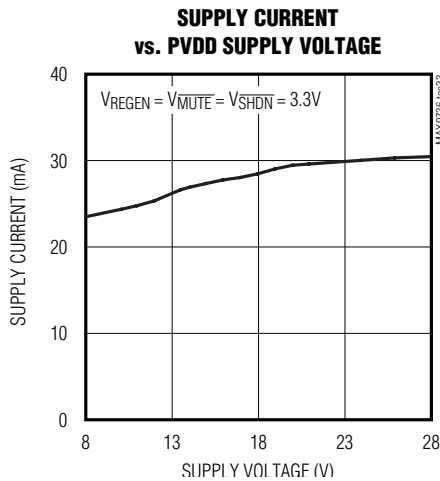

# Mono/Stereo High-Power Class D Amplifier

## Typical Operating Characteristics (continued)







(MAX9736A,  $V_{PVDD} = 12V$ , MOD = high, spread-spectrum modulation mode,  $V_{GND} = V_{PGND} = 0V$ ,  $V_{SHDN} = V_{MUTE} = 5V$ , unless otherwise noted.)

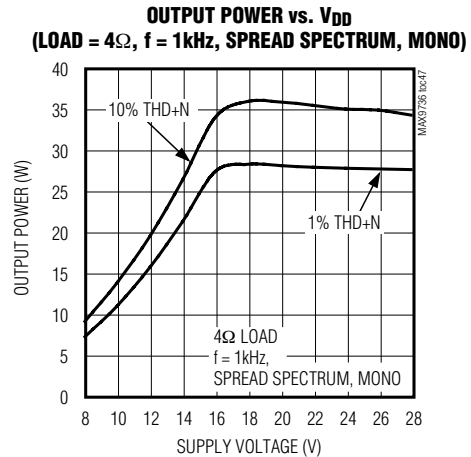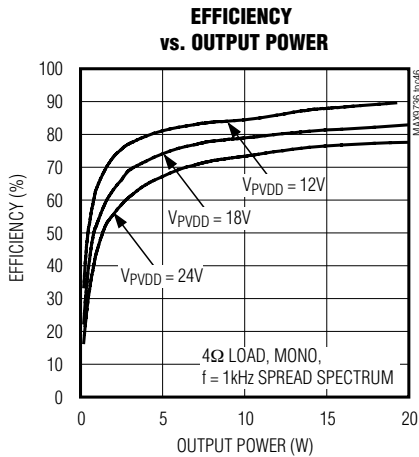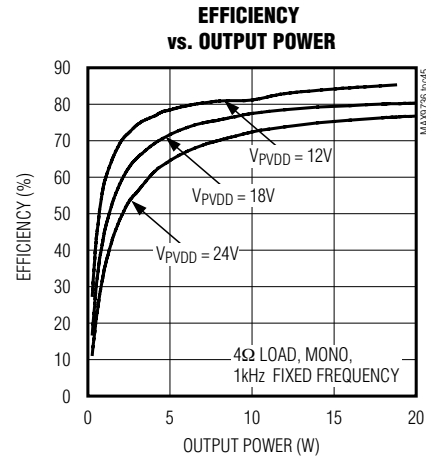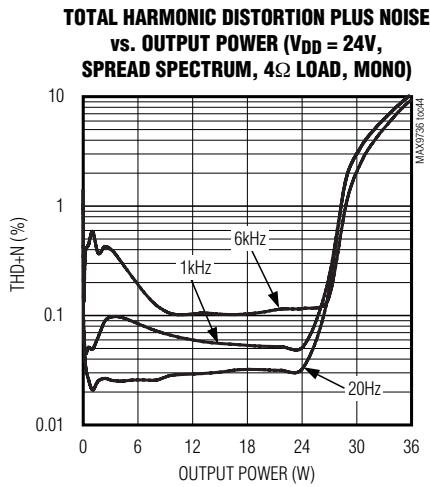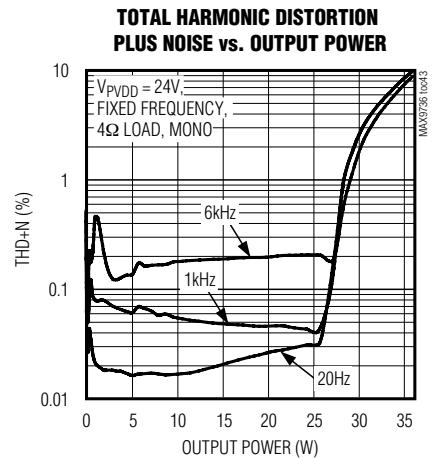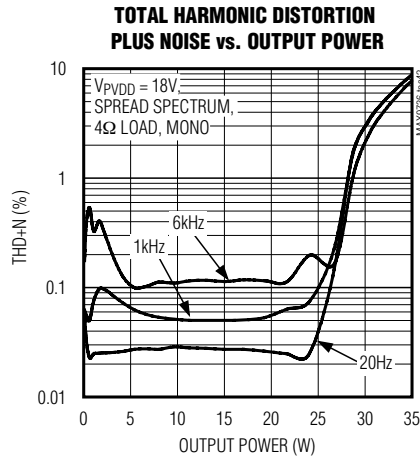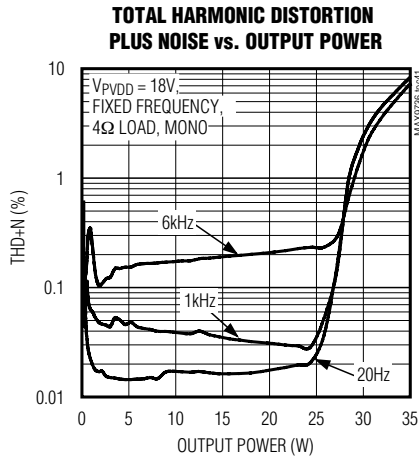

# Mono/Stereo High-Power Class D Amplifier

## Typical Operating Characteristics (continued)

(MAX9736A,  $V_{PVDD} = 12V$ , MOD = high, spread-spectrum modulation mode,  $V_{GND} = V_{PGND} = 0V$ ,  $V_{SHDN} = V_{MUTE} = 5V$ , unless otherwise noted.)

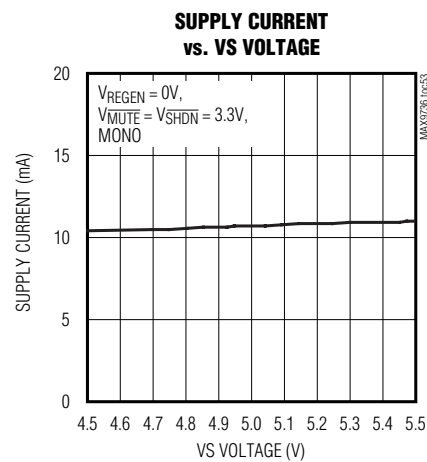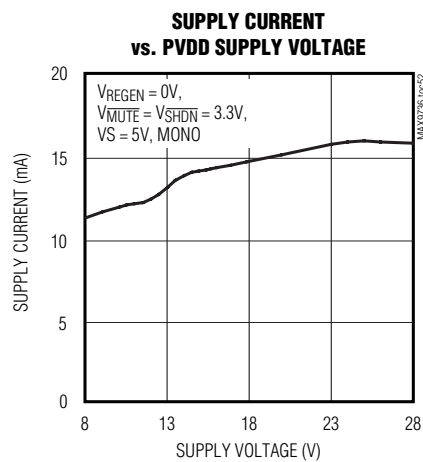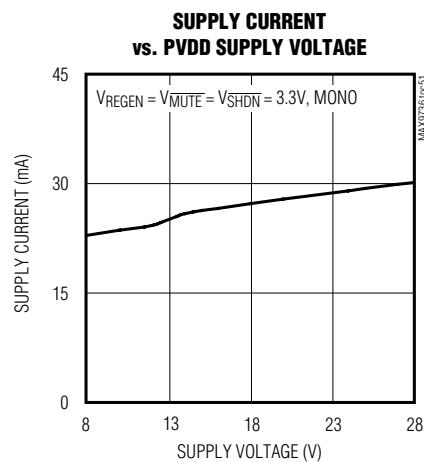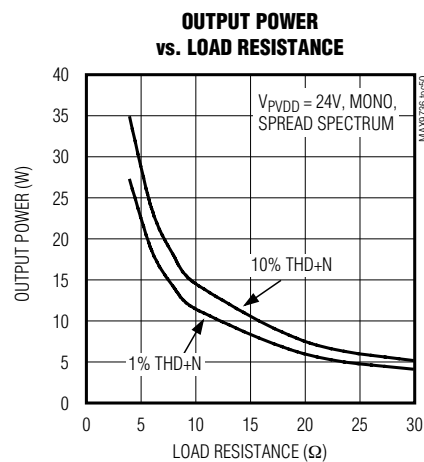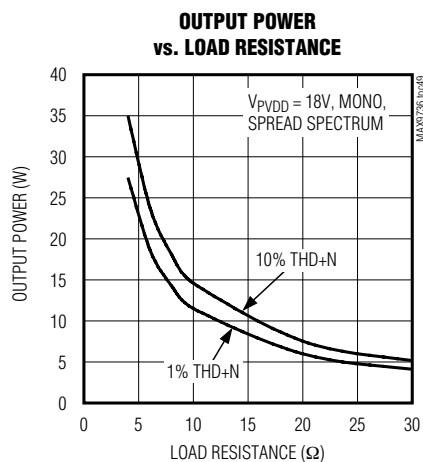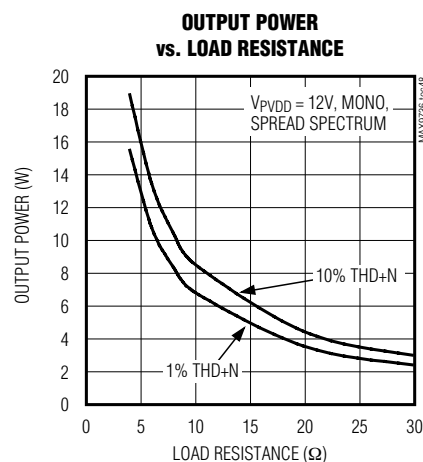

# Mono/Stereo High-Power Class D Amplifier

## Pin Description

| PIN      | NAME  | FUNCTION                                                                                                                                                                                                                                            |
|----------|-------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1, 2     | OUTL- | Left-Channel Negative Speaker Output                                                                                                                                                                                                                |
| 3        | BOOT  | Charge-Pump Output. Connect a 1 $\mu$ F charge-pump holding capacitor from BOOT to PVDD.                                                                                                                                                            |
| 4        | MONO  | Mono Select. Set MONO high for mono mode, low for stereo mode.                                                                                                                                                                                      |
| 5        | FBL   | Left-Channel Feedback. Connect feedback resistor between FBL and INL to set amplifier gain.                                                                                                                                                         |
| 6        | INL   | Stereo Left-Channel Inverting Input. In mono mode, INL is the inverting audio input for the mono amplifier.                                                                                                                                         |
| 7, 8, 17 | N.C.  | No Connection. Not internally connected. OK to connect to PGND.                                                                                                                                                                                     |
| 9        | MUTE  | Mute Input. Drive MUTE low to place the device in mute mode.                                                                                                                                                                                        |
| 10       | SHDN  | Shutdown Input. Drive SHDN low to place the device in shutdown mode.                                                                                                                                                                                |
| 11       | REGEN | Internal Regulator Enable Input. Connect REGEN to SHDN to enable the internal regulator. Drive REGEN low to disable the internal regulator, and supply the device with an external 5V supply on VS. See the <i>Power-Supply Sequencing</i> section. |
| 12       | COM   | Internal 2V Bias. Bypass COM to AGND with a 1 $\mu$ F capacitor.                                                                                                                                                                                    |
| 13, 14   | AGND  | Analog Ground                                                                                                                                                                                                                                       |
| 15       | REG   | Internal Regulator Output. Bypass REG to AGND with a 1 $\mu$ F capacitor.                                                                                                                                                                           |
| 16       | VS    | 5V Regulator Supply. Bypass VS to AGND with a 1 $\mu$ F capacitor. If REGEN is low, the internal regulator is disabled, and an external 5V supply must be connected to VS. See the <i>Power-Supply Sequencing</i> section.                          |
| 18       | INR   | Stereo Right-Channel Inverting Audio Input. In mono mode, INR is the inverting audio input for the uncommitted preamplifier (see the <i>Mono Configuration</i> section for more details).                                                           |
| 19       | FBR   | Right-Channel Feedback. Connect feedback resistor between FBR and INR to set amplifier gain.                                                                                                                                                        |
| 20       | MOD   | Output Modulation Select. Sets the output modulation scheme:<br>V <sub>MOD</sub> = Low, classic PWM/fixed-frequency mode<br>V <sub>MOD</sub> = High, filterless modulation/spread-spectrum mode                                                     |
| 21       | C1N   | Charge-Pump Flying-Capacitor Negative Terminal                                                                                                                                                                                                      |
| 22       | C1P   | Charge-Pump Flying-Capacitor Positive Terminal                                                                                                                                                                                                      |
| 23, 24   | OUTR- | Right-Channel Negative Speaker Output                                                                                                                                                                                                               |
| 25, 26   | OUTR+ | Right-Channel Positive Speaker Output                                                                                                                                                                                                               |
| 27, 30   | PVDD  | Power Supply. Bypass each PVDD pin to ground with 0.1 $\mu$ F capacitors. Also, use a single 220 $\mu$ F capacitor between PVDD and PGND.                                                                                                           |
| 28, 29   | PGND  | Power Ground                                                                                                                                                                                                                                        |
| 31, 32   | OUTL+ | Left-Channel Positive Speaker Output                                                                                                                                                                                                                |
| —        | EP    | Exposed Pad. Must be externally connected to PGND.                                                                                                                                                                                                  |

MAX9736

# Mono/Stereo High-Power Class D Amplifier

## Detailed Description

The MAX9736A/B/D filterless, stereo Class D audio power amplifiers offer Class AB performance and Class D efficiency with minimal board space. The MAX9736A outputs 2x15W in stereo mode and 30W in mono mode. The MAX9736B/D output 2x6W in stereo mode and 12W in mono mode. These devices operate from an 8V to 28V supply range.

The MAX9736 features a filterless, spread-spectrum switching mode (MOD = high) or a classic PWM fixed-frequency switching mode (MOD = low).

The MAX9736 features externally set gain and a low-power shutdown mode that reduces supply current to less than 1μA. Comprehensive click-and-pop circuitry minimizes noise into and out of shutdown or mute.

## Operating Modes

### Filterless Modulation/PWM Modulation

The MAX9736 features two output modulation schemes, filterless modulation (MOD = high) or classic PWM (MOD = low). Maxim's unique, filterless modulation scheme eliminates the LC filter required by traditional Class D amplifiers, reducing component count, conserving board space, and reducing system cost. Configure for classic PWM output when using a full LC filter.

Click-and-pop protection does not apply when the output is switching between modulation schemes. To maintain click-and-pop protection when switching between output schemes the device must enter shutdown mode and be configured to the new output scheme before the startup sequence is finished.

### Spread-Spectrum Mode

The MAX9736 features a unique spread-spectrum mode that flattens the wideband spectral components, improving EMI radiated by the speaker and cables. The switching frequency of the Class D amplifier varies randomly by ±6kHz around the 300kHz center frequency. Instead of a large amount of spectral energy present at multiples of the switching frequency, the energy is spread over a bandwidth that increases with frequency. Above a few megahertz, the wideband spectrum looks like white noise for EMI purposes. A proprietary amplifier topology ensures this white noise does not corrupt the noise floor in the audio bandwidth. The spread-spectrum mode is enabled only with filterless modulation.

## Efficiency

The high efficiency of a Class D amplifier is due to the switching operation of the output stage transistors. In a Class D amplifier, the output transistors act as switches and consume negligible power. Power loss associated with the Class D output stage is due to the  $I^2R$  loss of the MOSFET on-resistance, various switching losses, and quiescent current overhead.

The theoretical best efficiency of a linear amplifier is 78% at peak output power. Under typical music reproduction levels, the efficiency falls below 30%, whereas the MAX9736 exhibits > 80% efficiency under the same conditions (Figure 1).

## Shutdown

The MAX9736 features a shutdown mode that reduces power consumption and extends battery life in portable applications. The shutdown mode reduces supply current to 1μA (typ). Drive  $\overline{\text{SHDN}}$  high for normal operation. Drive  $\overline{\text{SHDN}}$  low to place the device in low-power shutdown mode. In shutdown mode, the outputs are high impedance; and the common-mode voltage at the output decays to zero. In shutdown mode, connect REGEN low to minimize current consumption.

## Mute Function

The MAX9736 features a clickless-and-popless mute mode. When the device is muted, the signal is attenuated at the speaker and the outputs stop switching. To mute the MAX9736, drive  $\overline{\text{MUTE}}$  low. Hold  $\overline{\text{MUTE}}$  low during system power-up and power-down to ensure that clicks and pops caused by circuits before the MAX9736 are suppressed.

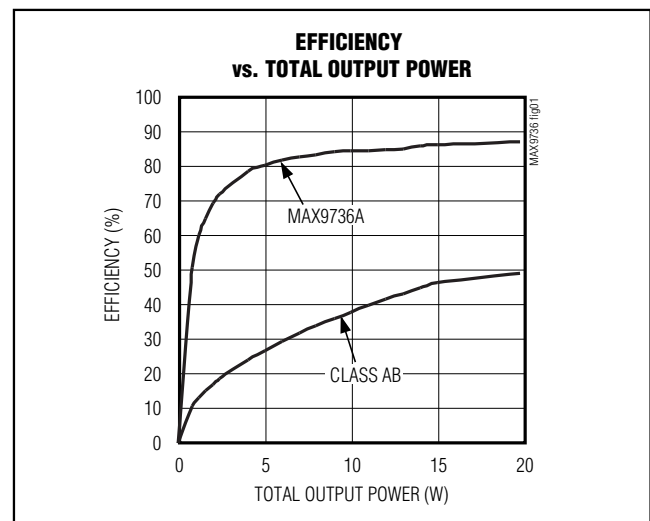


Figure 1. MAX9736A Efficiency vs. Class AB Efficiency

# Mono/Stereo High-Power Class D Amplifier

## Click-and-Pop Suppression

The MAX9736 features comprehensive click-and-pop suppression that minimizes audible transients on start-up and shutdown. While in shutdown, the H-bridge is in a high-impedance state.

## Mono Configuration

The MAX9736 features a mono mode that allows the right and left channels to operate in parallel, achieving up to 30W (MAX9736A) of output power. Apply a logic-high to MONO to enable mono mode. In mono mode, an audio signal applied to the left channel (INL) is routed to the H-bridges of both channels. Also in mono mode, the right-channel preamplifier becomes an uncommitted operational amplifier, allowing for flexibility in system design. Connect OUTL+ to OUTR+ and OUTL- to OUTR- using heavy PCB traces as close as possible to the device. Driving MONO low (stereo mode) while the outputs are wired together in mono mode can trigger the short-circuit or thermal-overload protection or both.

## Current Limit

When the output current reaches the current limit, 4.6A (typ), the MAX9736 disables the outputs and initiates a 450 $\mu$ s startup sequence. The shutdown and startup sequence is repeated until the output fault is removed. Properly designed applications do not enter current-limit mode unless the output is short circuited or connected incorrectly.

## Thermal Shutdown

When the die temperature reaches the thermal shutdown threshold, +160°C (typ), the MAX9736 outputs are disabled. When the die temperature decreases by 30°C, normal operation resumes. Some causes of thermal shutdown are excessively low load impedance, poor thermal contact between the MAX9736's exposed pad and the PCB, elevated ambient temperature, or poor PCB layout and assembly.

## Applications Information

### Filterless Class D Operation

The MAX9736 meets EN55022B EMC radiation limits with an inexpensive ferrite bead and capacitor filter when the speaker leads are less than or equal to 1m. Select a ferrite bead with 100 $\Omega$  to 600 $\Omega$  impedance and rated for at least 2A. The capacitor value varies based on the ferrite bead chosen and the speaker lead length. See Figure 3 for the correct connections of these components.

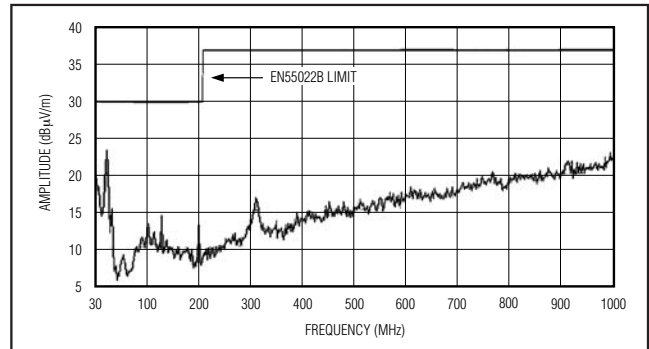


Figure 2. EMI Performance

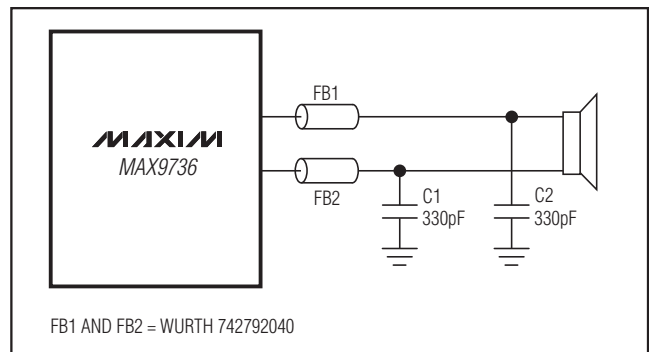


Figure 3. Ferrite Bead Filter

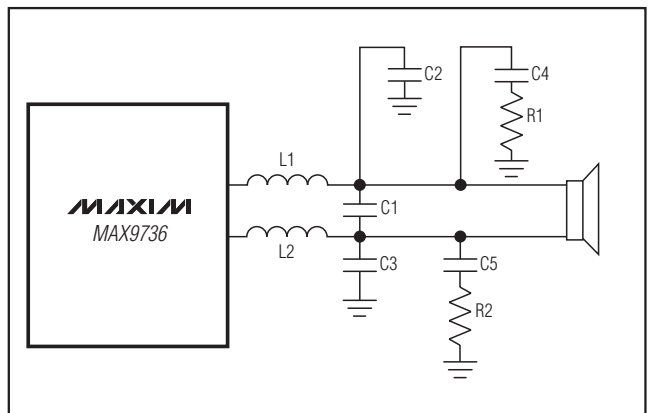


Figure 4. Output Filter for PWM Mode

When evaluating the MAX9736 with a ferrite bead filter and resistive load, include a series inductor (68 $\mu$ H for 8 $\Omega$  load and 33 $\mu$ H for 4 $\Omega$  load) to model the actual loudspeaker's behavior. Omitting the series inductor

# Mono/Stereo High-Power Class D Amplifier

Table 1. Suggested Values for LC Filter

| R <sub>L</sub> (Ω) | L1, L2 (μH) | C1 (μF) | C2, C3 (μF) | C4, C5 (μF) | R1, R2 (Ω) |
|--------------------|-------------|---------|-------------|-------------|------------|
| 4                  | 10          | 0.47    | 0.10        | 0.22        | 10         |
| 8                  | 15          | 0.15    | 0.15        | 0.15        | 15         |
| 16                 | 33          | 0.10    | 0.10        | 0.10        | 33         |

reduces the efficiency, the THD+N performance, and the output power of the MAX9736. When evaluating with a load speaker, no series inductor is required.

## Inductor-Based Output Filters

Some applications use the MAX9736 with a full inductor/capacitor-based (LC) output filter. Select the PWM output mode for best audio performance. See Figure 4 for the correct connections of these components.

The load impedance of the speaker determines the filter component selection (see Table 1).

Inductors L1 and L2, and capacitor C1 form the primary output filter. Capacitors C2 and C3 provide common-mode filtering to reduce radiated emissions. Capacitors C4 and C5, plus resistors R1 and R2, form a Zobel at the output. A Zobel corrects the output loading to compensate for the rising impedance of the loudspeaker. Without a Zobel the filter exhibits a peak response near the cutoff frequency.

## Component Selection

### Gain-Setting Resistors

External feedback resistors set the gain of the MAX9736. The output stage provides a fixed internal gain in addition to the externally set input stage gain. For the MAX9736A/D, the fixed output-stage gain is set at 17dB (7V/V). For the MAX9736B, the fixed output-stage gain is set at 13.6dB (4.8V/V). Set overall gain by using resistors R<sub>F</sub> and R<sub>IN</sub> (Figure 5) as follows:

$$\text{MAX9736 A/D: } A_V = -7.1 \left( \frac{R_F}{R_{IN}} \right) \text{ V/V}$$

$$\text{MAX9736B: } A_V = -4.8 \left( \frac{R_F}{R_{IN}} \right) \text{ V/V}$$

where A<sub>V</sub> is the desired voltage gain. Choose R<sub>F</sub> between 10kΩ and 50kΩ.

The FB terminal is an op amp output and the IN terminal is the op amp inverting input, allowing the MAX9736 to be configured as a summing amplifier, a filter, or an equalizer.

## Input Capacitor

An input capacitor, C<sub>IN</sub>, in conjunction with the input resistor, R<sub>IN</sub>, of the MAX9736 forms a highpass filter that removes the DC bias from an incoming signal. The AC-coupling capacitor allows the amplifier to automatically bias the signal to an optimum DC level. Assuming zero-source impedance, the -3dB point of the highpass filter is given by:

$$f_{-3dB} = \frac{1}{2\pi R_{IN} C_{IN}}$$

Choose C<sub>IN</sub> so that f<sub>-3dB</sub> is well below the lowest frequency of interest. Use capacitors whose dielectrics have low voltage coefficients. Capacitors with high-voltage coefficients cause increased distortion close to f<sub>-3dB</sub>.

## COM Capacitor

COM is the output of the internally generated DC bias voltage. Bypass COM with a 1μF capacitor to AGND.

## Power Supplies

The MAX9736 features separate supplies for signal and power portions of the device, allowing for the optimum combination of headroom, power dissipation, and noise immunity. The speaker amplifiers are powered from PVDD and can range from 8V to 28V. The remainder of the MAX9736 is powered by VS.

## Power-Supply Sequencing

During power-up and power-down, VS must not exceed PVDD. VS greater than PVDD will damage the device.

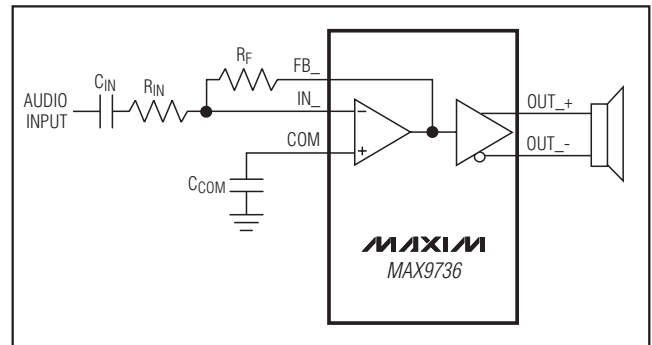


Figure 5. Setting Gain

## **Mono/Stereo High-Power Class D Amplifier**

### ***Internal Regulator***

The MAX9736 features an internal 5V regulator, VS, powered from PVDD. Connect REGEN to  $\overline{\text{SHDN}}$  so that the internal 5V regulator is enabled/disabled when the MAX9736 is enabled/disabled. If an external 5V supply is available, drive REGEN low and connect external 5V supply to VS to minimize the power dissipation of the MAX9736.

### ***Supply Bypassing, Layout, and Grounding***


Proper layout and grounding are essential for optimum performance. Use wide traces for the power-supply inputs and amplifier outputs to minimize losses due to parasitic trace resistance. Proper grounding improves audio performance, minimizes crosstalk between channels, and prevents switching noise from coupling into the audio signal. Connect PGND and AGND together at a single point on the PCB. Route all traces that carry switching transients away from AGND and the traces/components in the audio signal path.

Bypass each PVDD pin with a 0.1 $\mu$ F capacitor to PGND. Place the bypass capacitors as close as possible to the MAX9736. Place a 220 $\mu$ F capacitor between PVDD and PGND. Bypass VS with a 1 $\mu$ F capacitor to AGND.

Use wide, low-resistance output traces. Current drawn from the outputs increases as load impedance decreases. High-output trace resistance decreases the power delivered to the load. The MAX9736 TQFN package features an exposed thermal paddle on its underside. This paddle lowers the package's thermal resistance by providing a heat conduction path from the die to the PCB. Connect the exposed thermal pad to PGND by using a large pad and multiple vias to the PGND plane.

# Mono/Stereo High-Power Class D Amplifier


## Typical Application Circuit for Stereo Output Configuration

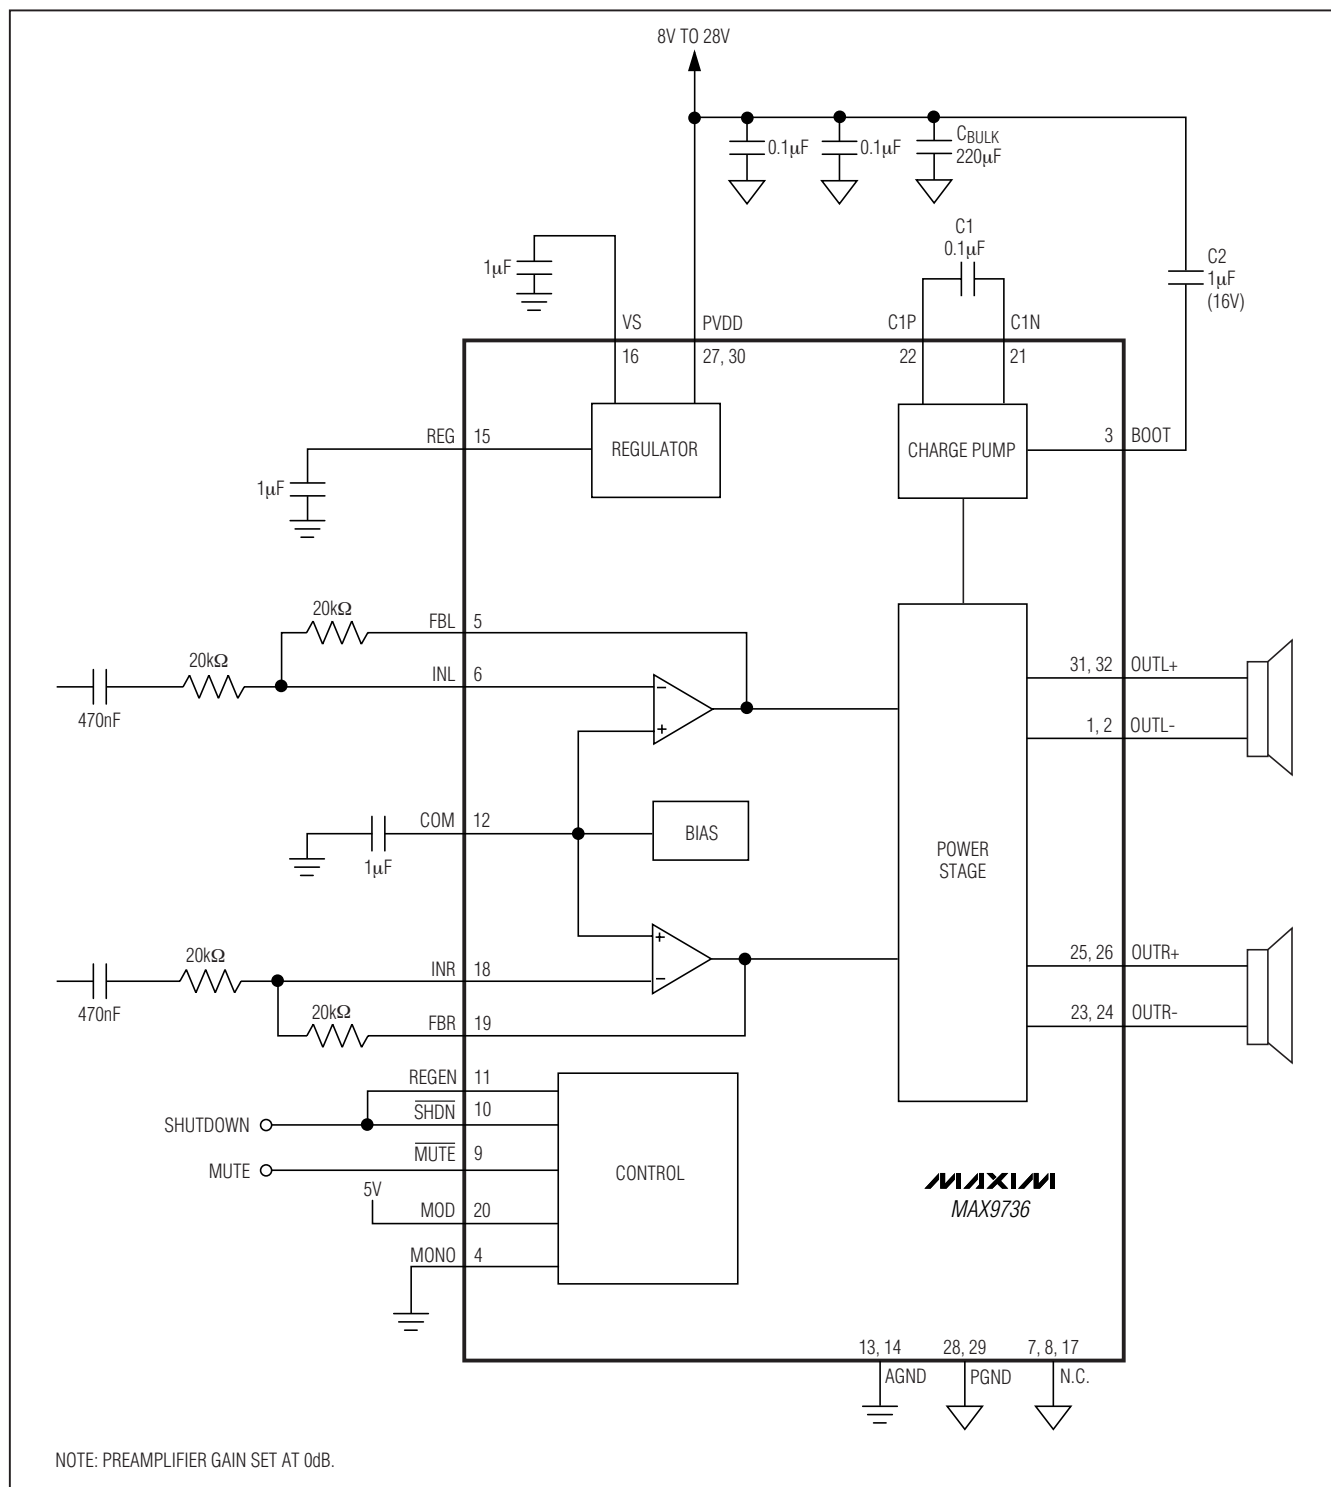

# Mono/Stereo High-Power Class D Amplifier


## Typical Application Circuit for Single (Mono) Output Configuration

MAX9736

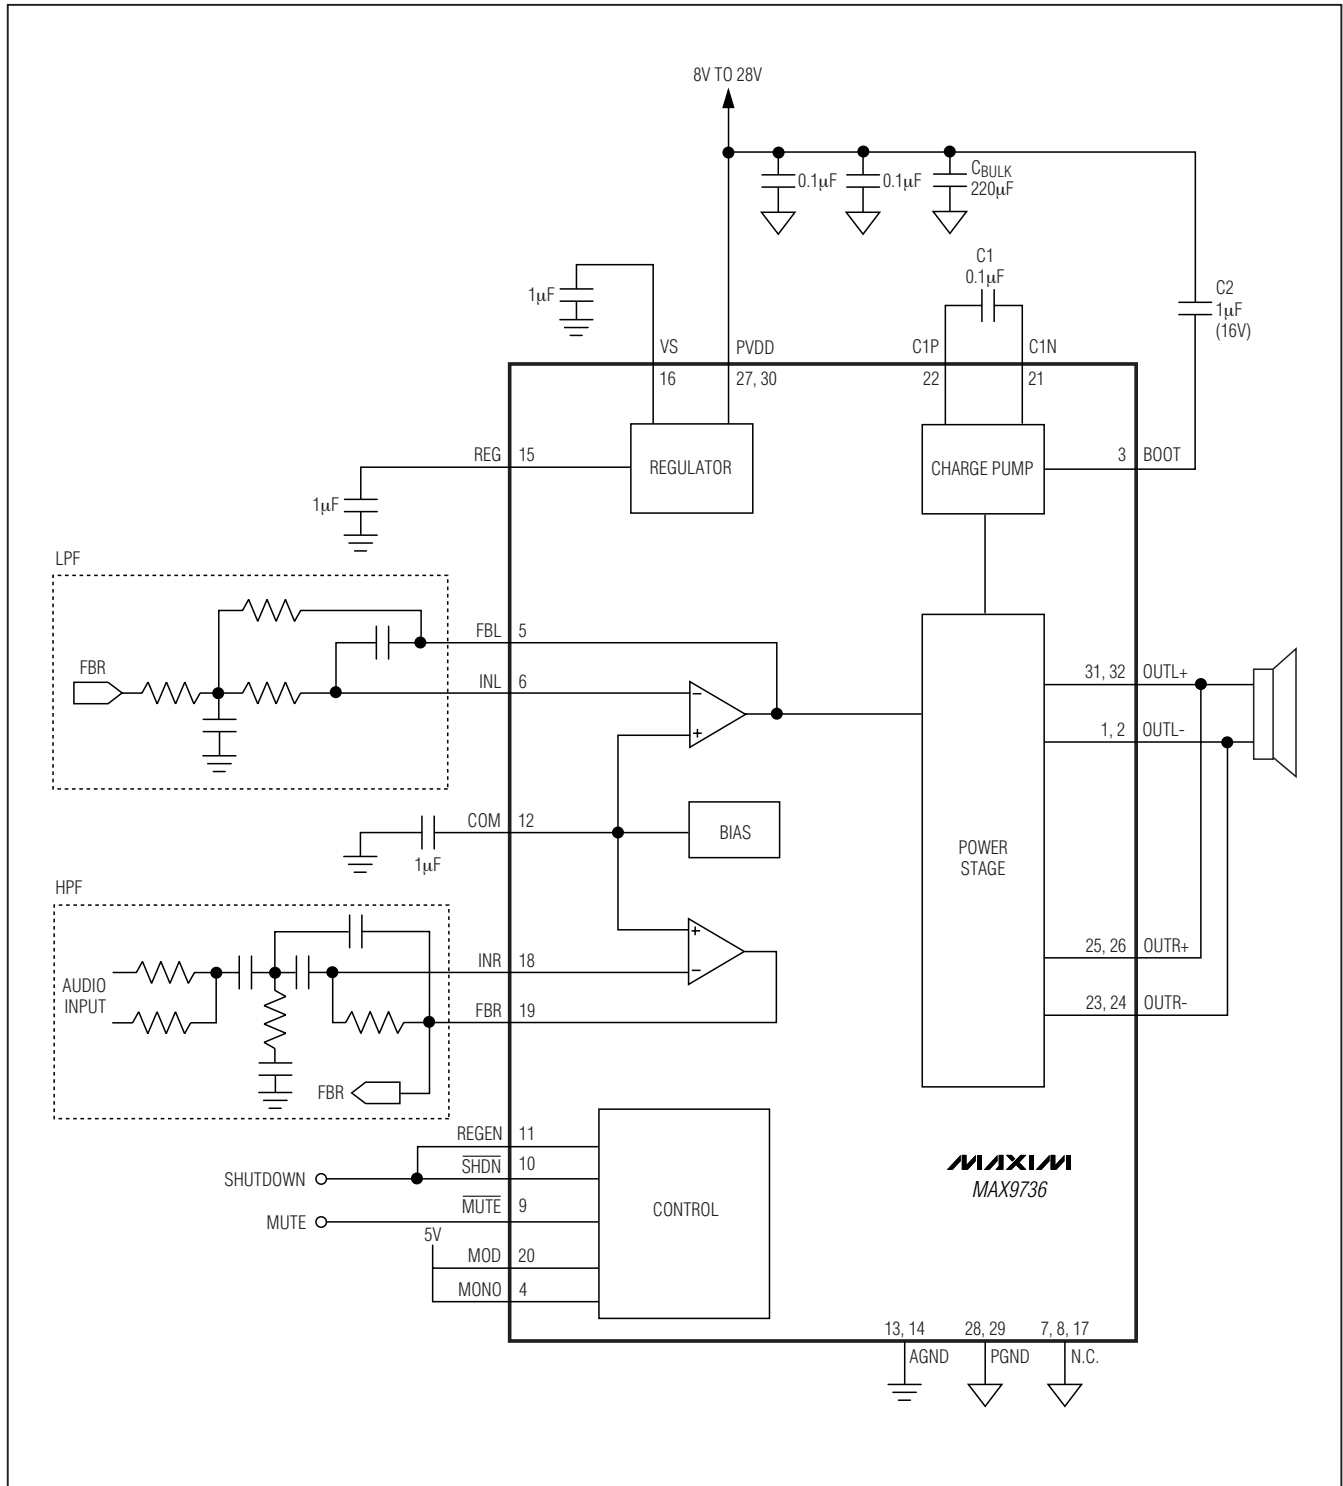

# Mono/Stereo High-Power Class D Amplifier

## Pin Configuration

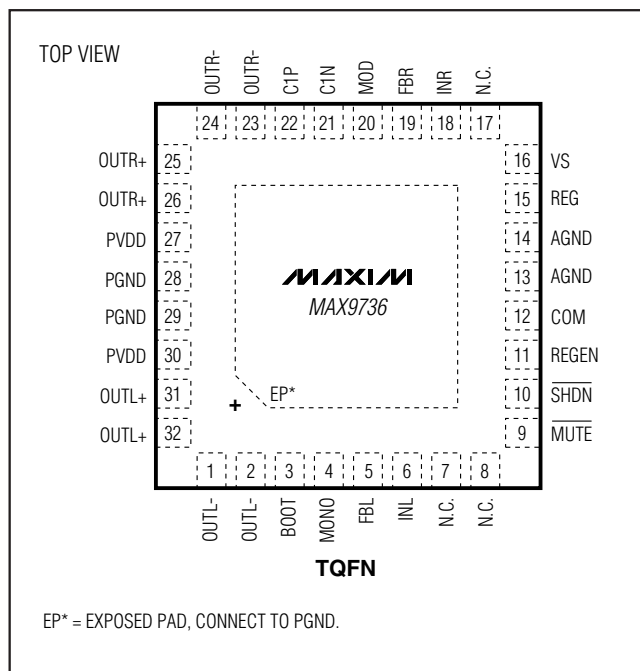

## Ordering Information (continued)

| PART                | STEREO/MONO<br>OUTPUT POWER | PIN-PACKAGE              |
|---------------------|-----------------------------|--------------------------|
| MAX9736AETJ/V+      | 2 x 15W/<br>1 x 30W         | 32 TQFN-EP*<br>7mm x 7mm |
| <b>MAX9736BETJ+</b> | 2 x 6W/<br>1 x 12W          | 32 TQFN-EP*<br>7mm x 7mm |
| MAX9736BETJ/V+      | 2 x 6W/<br>1 x 12W          | 32 TQFN-EP*<br>7mm x 7mm |
| <b>MAX9736DETJ+</b> | 2 x 6W/<br>1 x 12W          | 32 TQFN-EP*<br>5mm x 5mm |
| MAX9736DETJ/V+      | 2 x 6W/<br>1 x 12W          | 32 TQFN-EP*<br>5mm x 5mm |

**Note:** All devices are specified over the -40°C to +85°C operating temperature range.

+ Denotes a lead(Pb)-free/RoHS-compliant package.

\*EP = Exposed pad.

/V denotes an automotive qualified part.

## Chip Information

PROCESS: BiCMOS


# Mono/Stereo High-Power Class D Amplifier

## Package Information

For the latest package outline information and land patterns, go to [www.maxim-ic.com/packages](http://www.maxim-ic.com/packages).

| PACKAGE TYPE           | PACKAGE CODE | DOCUMENT NO.            |
|------------------------|--------------|-------------------------|
| 32 TQFN-EP (7mm x 7mm) | T3277-3      | <a href="#">21-0144</a> |
| 32 TQFN-EP (5mm x 5mm) | T3255-4      | <a href="#">21-0140</a> |

MAX9736

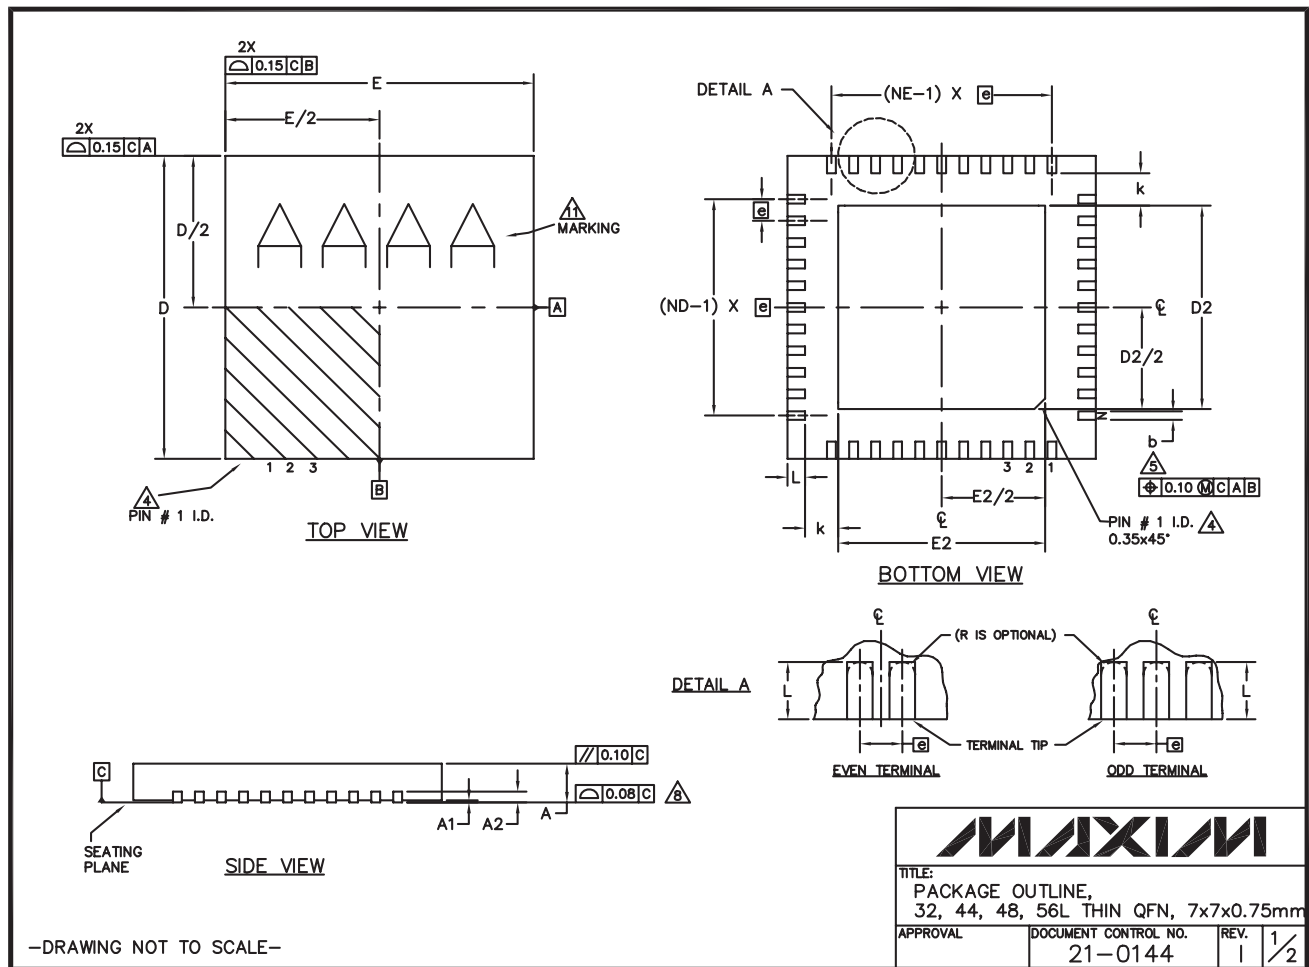

# Mono/Stereo High-Power Class D Amplifier

## Package Information (continued)

For the latest package outline information and land patterns, go to [www.maxim-ic.com/packages](http://www.maxim-ic.com/packages).

| COMMON DIMENSIONS |           |      |      |           |      |      |           |      |      |                          |      |      |           |      |      |
|-------------------|-----------|------|------|-----------|------|------|-----------|------|------|--------------------------|------|------|-----------|------|------|
| PKG               | 32L 7x7   |      |      | 44L 7x7   |      |      | 48L 7x7   |      |      | CUSTOM PKG.<br>(T4877-1) |      |      | 56L 7x7   |      |      |
| SYMBOL            | MIN.      | NOM. | MAX. | MIN.      | NOM. | MAX. | MIN.      | NOM. | MAX. | MIN.                     | NOM. | MAX. | MIN.      | NOM. | MAX. |
| A                 | 0.70      | 0.75 | 0.80 | 0.70      | 0.75 | 0.80 | 0.70      | 0.75 | 0.80 | 0.70                     | 0.75 | 0.80 | 0.70      | 0.75 | 0.80 |
| A1                | 0         | 0.02 | 0.05 | 0         | 0.02 | 0.05 | 0         | 0.02 | 0.05 | 0                        | 0.02 | 0.05 | 0         | —    | 0.05 |
| A2                | 0.20 REF. |      |      | 0.20 REF. |      |      | 0.20 REF. |      |      | 0.20 REF.                |      |      | 0.20 REF. |      |      |
| b                 | 0.25      | 0.30 | 0.35 | 0.20      | 0.25 | 0.30 | 0.20      | 0.25 | 0.30 | 0.20                     | 0.25 | 0.30 | 0.15      | 0.20 | 0.25 |
| D                 | 6.90      | 7.00 | 7.10 | 6.90      | 7.00 | 7.10 | 6.90      | 7.00 | 7.10 | 6.90                     | 7.00 | 7.10 | 6.90      | 7.00 | 7.10 |
| E                 | 6.90      | 7.00 | 7.10 | 6.90      | 7.00 | 7.10 | 6.90      | 7.00 | 7.10 | 6.90                     | 7.00 | 7.10 | 6.90      | 7.00 | 7.10 |
| e                 | 0.65 BSC. |      |      | 0.50 BSC. |      |      | 0.50 BSC. |      |      | 0.50 BSC.                |      |      | 0.40 BSC. |      |      |
| k                 | 0.25      | —    | —    | 0.25      | —    | —    | 0.25      | —    | —    | 0.25                     | —    | —    | 0.25      | —    | —    |
| L                 | 0.45      | 0.55 | 0.65 | 0.45      | 0.55 | 0.65 | 0.30      | 0.40 | 0.50 | 0.45                     | 0.55 | 0.65 | 0.30      | 0.40 | 0.50 |
| N                 | 32        |      |      | 44        |      |      | 48        |      |      | 44                       |      |      | 56        |      |      |
| ND                | 8         |      |      | 11        |      |      | 12        |      |      | 10                       |      |      | 14        |      |      |
| NE                | 8         |      |      | 11        |      |      | 12        |      |      | 12                       |      |      | 14        |      |      |

| EXPOSED PAD VARIATIONS |                      |      |      |      |      |      |      |                          |
|------------------------|----------------------|------|------|------|------|------|------|--------------------------|
| PKG.<br>CODES          | DEPOPULATED<br>LEADS | D2   |      |      | E2   |      |      | JEDEC<br>MO220<br>REV. C |
|                        |                      | MIN. | NOM. | MAX. | MIN. | NOM. | MAX. |                          |
| T3277-2                | —                    | 4.55 | 4.70 | 4.85 | 4.55 | 4.70 | 4.85 | —                        |
| T3277-3                | —                    | 4.55 | 4.70 | 4.85 | 4.55 | 4.70 | 4.85 | —                        |
| T4477-2                | —                    | 4.55 | 4.70 | 4.85 | 4.55 | 4.70 | 4.85 | WKD-1                    |
| T4477-3                | —                    | 4.55 | 4.70 | 4.85 | 4.55 | 4.70 | 4.85 | WKD-1                    |
| T4877-3                | —                    | 4.95 | 5.10 | 5.25 | 4.95 | 5.10 | 5.25 | —                        |
| T4877-4                | —                    | 5.40 | 5.50 | 5.60 | 5.40 | 5.50 | 5.60 | —                        |
| T4877-6                | —                    | 5.40 | 5.50 | 5.60 | 5.40 | 5.50 | 5.60 | —                        |
| T4877-7                | —                    | 4.95 | 5.10 | 5.25 | 4.95 | 5.10 | 5.25 | —                        |
| T4877M-1               | —                    | 5.40 | 5.50 | 5.60 | 5.40 | 5.50 | 5.60 | —                        |
| T4877M-6               | —                    | 5.40 | 5.50 | 5.60 | 5.40 | 5.50 | 5.60 | —                        |
| T4877MN-8              | —                    | 5.40 | 5.50 | 5.60 | 5.40 | 5.50 | 5.60 | —                        |
| T4877N-8               | —                    | 5.40 | 5.50 | 5.60 | 5.40 | 5.50 | 5.60 | —                        |
| T5677-1                | —                    | 5.40 | 5.50 | 5.60 | 5.40 | 5.50 | 5.60 | —                        |
| T5677MN-1              | —                    | 5.40 | 5.50 | 5.60 | 5.40 | 5.50 | 5.60 | —                        |
| T5677-2                | —                    | 5.40 | 5.50 | 5.60 | 5.40 | 5.50 | 5.60 | —                        |

### NOTES:

- DIMENSIONING & TOLERANCING CONFORM TO ASME Y14.5M-1994.
- ALL DIMENSIONS ARE IN MILLIMETERS. ANGLES ARE IN DEGREES.
- N IS THE TOTAL NUMBER OF TERMINALS.
- THE TERMINAL #1 IDENTIFIER AND TERMINAL NUMBERING CONVENTION SHALL CONFORM TO JESD 95-1 SPP-012. DETAILS OF TERMINAL #1 IDENTIFIER ARE OPTIONAL, BUT MUST BE LOCATED WITHIN THE ZONE INDICATED. THE TERMINAL #1 IDENTIFIER MAY BE EITHER A MOLD OR MARKED FEATURE.
- DIMENSION b APPLIES TO METALLIZED TERMINAL AND IS MEASURED BETWEEN 0.25 mm AND 0.30 mm FROM TERMINAL TIP.
- ND AND NE REFER TO THE NUMBER OF TERMINALS ON EACH D AND E SIDE RESPECTIVELY.
- DEPOPULATION IS POSSIBLE IN A SYMMETRICAL FASHION.
- COPLANARITY APPLIES TO THE EXPOSED HEAT SINK SLUG AS WELL AS THE TERMINALS.
- DRAWING CONFORMS TO JEDEC MO220 EXCEPT THE EXPOSED PAD DIMENSIONS OF T4877-3/-4/-6 & T5677-1.
- WARPAGE SHALL NOT EXCEED 0.10 mm.
- MARKING IS FOR PACKAGE ORIENTATION REFERENCE ONLY.
- NUMBER OF LEADS SHOWN ARE FOR REFERENCE ONLY.
- ALL DIMENSIONS APPLY TO BOTH LEADED (-) AND PbFREE (+) PKG. CODES.

—DRAWING NOT TO SCALE—


| MAXIM                                                              |                                 |           |     |
|--------------------------------------------------------------------|---------------------------------|-----------|-----|
| TITLE:<br>PACKAGE OUTLINE,<br>32, 44, 48, 56L THIN QFN, 7x7x0.75mm |                                 |           |     |
| APPROVAL                                                           | DOCUMENT CONTROL NO.<br>21-0144 | REV.<br>1 | 2/2 |

## MAX9736


QFN THIN.EPS

TOP VIEW


TOP VIEW

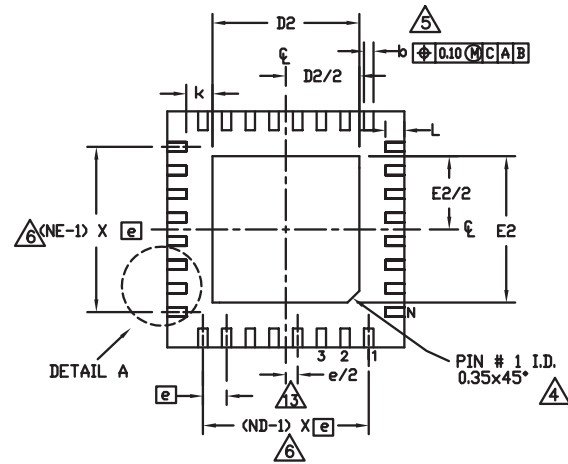

BOTTOM VIEW

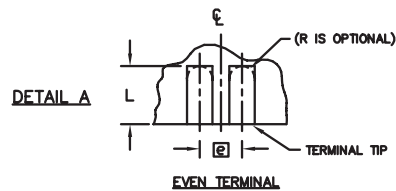

EVEN TERMINAL

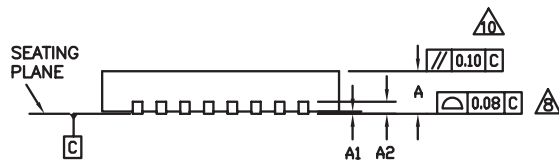

SIDE VIEW

-DRAWING NOT TO SCALE-



|        |                                                          |
|--------|----------------------------------------------------------|
| TITLE: | PACKAGE OUTLINE,<br>16,20,28,32,40L THIN QFN, 5x5x0.75mm |
|--------|----------------------------------------------------------|

|          |                                 |           |     |
|----------|---------------------------------|-----------|-----|
| APPROVAL | DOCUMENT CONTROL NO.<br>21-0140 | REV.<br>M | 1/2 |
|----------|---------------------------------|-----------|-----|

# Mono/Stereo High-Power Class D Amplifier

## Package Information (continued)

For the latest package outline information and land patterns, go to [www.maxim-ic.com/packages](http://www.maxim-ic.com/packages).

| COMMON DIMENSIONS |           |      |      |           |      |      |           |      |      |           |      |      |           |      |      |
|-------------------|-----------|------|------|-----------|------|------|-----------|------|------|-----------|------|------|-----------|------|------|
| PKG.              | 16L 5x5   |      |      | 20L 5x5   |      |      | 28L 5x5   |      |      | 32L 5x5   |      |      | 40L 5x5   |      |      |
| SYMBOL            | MIN.      | NOM. | MAX. | MIN.      | NOM. | MAX. | MIN.      | NOM. | MAX. | MIN.      | NOM. | MAX. | MIN.      | NOM. | MAX. |
| A                 | 0.70      | 0.75 | 0.80 | 0.70      | 0.75 | 0.80 | 0.70      | 0.75 | 0.80 | 0.70      | 0.75 | 0.80 | 0.70      | 0.75 | 0.80 |
| A1                | 0         | 0.02 | 0.05 | 0         | 0.02 | 0.05 | 0         | 0.02 | 0.05 | 0         | 0.02 | 0.05 | 0         | 0.02 | 0.05 |
| A2                | 0.20 REF. |      |      | 0.20 REF. |      |      | 0.20 REF. |      |      | 0.20 REF. |      |      | 0.20 REF. |      |      |
| b                 | 0.25      | 0.30 | 0.35 | 0.25      | 0.30 | 0.35 | 0.20      | 0.25 | 0.30 | 0.20      | 0.25 | 0.30 | 0.15      | 0.20 | 0.25 |
| D                 | 4.90      | 5.00 | 5.10 | 4.90      | 5.00 | 5.10 | 4.90      | 5.00 | 5.10 | 4.90      | 5.00 | 5.10 | 4.90      | 5.00 | 5.10 |
| E                 | 4.90      | 5.00 | 5.10 | 4.90      | 5.00 | 5.10 | 4.90      | 5.00 | 5.10 | 4.90      | 5.00 | 5.10 | 4.90      | 5.00 | 5.10 |
| e                 | 0.80 BSC. |      |      | 0.65 BSC. |      |      | 0.50 BSC. |      |      | 0.50 BSC. |      |      | 0.40 BSC. |      |      |
| k                 | 0.25      | —    | —    | 0.25      | —    | —    | 0.25      | —    | —    | 0.25      | —    | —    | 0.25      | —    | —    |
| L                 | 0.30      | 0.40 | 0.50 | 0.45      | 0.55 | 0.65 | 0.45      | 0.55 | 0.65 | 0.30      | 0.40 | 0.50 | 0.30      | 0.40 | 0.50 |
| N                 | 16        |      |      | 20        |      |      | 28        |      |      | 32        |      |      | 40        |      |      |
| ND                | 4         |      |      | 5         |      |      | 7         |      |      | 8         |      |      | 10        |      |      |
| NE                | 4         |      |      | 5         |      |      | 7         |      |      | 8         |      |      | 10        |      |      |
| JEDEC             | WHHB      |      |      | WHHC      |      |      | WHHD-1    |      |      | WHHD-2    |      |      | -----     |      |      |

### NOTES:

- DIMENSIONING & TOLERANCING CONFORM TO ASME Y14.5M-1994.
- ALL DIMENSIONS ARE IN MILLIMETERS. ANGLES ARE IN DEGREES.
- N IS THE TOTAL NUMBER OF TERMINALS.
- THE TERMINAL #1 IDENTIFIER AND TERMINAL NUMBERING CONVENTION SHALL CONFORM TO JESD 95-1 SPP-012. DETAILS OF TERMINAL #1 IDENTIFIER ARE OPTIONAL, BUT MUST BE LOCATED WITHIN THE ZONE INDICATED. THE TERMINAL #1 IDENTIFIER MAY BE EITHER A MOLD OR MARKED FEATURE.
- DIMENSION b APPLIES TO METALLIZED TERMINAL AND IS MEASURED BETWEEN 0.25 mm AND 0.30 mm FROM TERMINAL TIP.
- ND AND NE REFER TO THE NUMBER OF TERMINALS ON EACH D AND E SIDE RESPECTIVELY.
- DEPOPULATION IS POSSIBLE IN A SYMMETRICAL FASHION.
- COPLANARITY APPLIES TO THE EXPOSED HEAT SINK SLUG AS WELL AS THE TERMINALS.
- DRAWING CONFORMS TO JEDEC MO220, EXCEPT EXPOSED PAD DIMENSION FOR T2855-3, T2855-6, T4055-1 AND T4055-2.
- WARPAGE SHALL NOT EXCEED 0.10 mm.
- MARKING IS FOR PACKAGE ORIENTATION REFERENCE ONLY.
- NUMBER OF LEADS SHOWN ARE FOR REFERENCE ONLY.
- LEAD CENTERLINES TO BE AT TRUE POSITION AS DEFINED BY BASIC DIMENSION 'e', ±0.05.
- ALL DIMENSIONS APPLY TO BOTH LEADED (-) AND PbFREE (+) PKG. CODES.

—DRAWING NOT TO SCALE—

| EXPOSED PAD VARIATIONS |      |      |      |      |      |      |
|------------------------|------|------|------|------|------|------|
| PKG. CODES             | D2   |      |      | E2   |      |      |
|                        | MIN. | NOM. | MAX. | MIN. | NOM. | MAX. |
| T1655-2                | 3.00 | 3.10 | 3.20 | 3.00 | 3.10 | 3.20 |
| T1655-3                | 3.00 | 3.10 | 3.20 | 3.00 | 3.10 | 3.20 |
| T1655-4                | 2.19 | 2.29 | 2.39 | 2.19 | 2.29 | 2.39 |
| T165N-1                | 3.00 | 3.10 | 3.20 | 3.00 | 3.10 | 3.20 |
| T2055-3                | 3.00 | 3.10 | 3.20 | 3.00 | 3.10 | 3.20 |
| T2055-4                | 3.00 | 3.10 | 3.20 | 3.00 | 3.10 | 3.20 |
| T2055-5                | 3.15 | 3.25 | 3.35 | 3.15 | 3.25 | 3.35 |
| T2055MN-5              | 3.15 | 3.25 | 3.35 | 3.15 | 3.25 | 3.35 |
| T2855-3                | 3.15 | 3.25 | 3.35 | 3.15 | 3.25 | 3.35 |
| T2855-4                | 2.60 | 2.70 | 2.80 | 2.60 | 2.70 | 2.80 |
| T2855-5                | 2.60 | 2.70 | 2.80 | 2.60 | 2.70 | 2.80 |
| T2855-6                | 3.15 | 3.25 | 3.35 | 3.15 | 3.25 | 3.35 |
| T2855-7                | 2.60 | 2.70 | 2.80 | 2.60 | 2.70 | 2.80 |
| T2855-8                | 3.15 | 3.25 | 3.35 | 3.15 | 3.25 | 3.35 |
| T2855N-1               | 3.15 | 3.25 | 3.35 | 3.15 | 3.25 | 3.35 |
| T3255-3                | 3.00 | 3.10 | 3.20 | 3.00 | 3.10 | 3.20 |
| T3255-4                | 3.00 | 3.10 | 3.20 | 3.00 | 3.10 | 3.20 |
| T3255M-4               | 3.00 | 3.10 | 3.20 | 3.00 | 3.10 | 3.20 |
| T3255-5                | 3.00 | 3.10 | 3.20 | 3.00 | 3.10 | 3.20 |
| T3255N-1               | 3.00 | 3.10 | 3.20 | 3.00 | 3.10 | 3.20 |
| T4055-1                | 3.40 | 3.50 | 3.60 | 3.40 | 3.50 | 3.60 |
| T4055-2                | 3.40 | 3.50 | 3.60 | 3.40 | 3.50 | 3.60 |
| T4055N-1               | 3.40 | 3.50 | 3.60 | 3.40 | 3.50 | 3.60 |
| T4055MN-1              | 3.40 | 3.50 | 3.60 | 3.40 | 3.50 | 3.60 |

TITLE:  
PACKAGE OUTLINE,  
16,20,28,32,40L THIN QFN, 5x5x0.75mm

|          |                                 |           |     |
|----------|---------------------------------|-----------|-----|
| APPROVAL | DOCUMENT CONTROL NO.<br>21-0140 | REV.<br>M | 2/2 |
|----------|---------------------------------|-----------|-----|

# Mono/Stereo High-Power Class D Amplifier

## Revision History

| REVISION<br>NUMBER | REVISION<br>DATE | DESCRIPTION                                                                                                                                                                                                                      | PAGES<br>CHANGED                  |
|--------------------|------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------|
| 0                  | 1/08             | Initial release                                                                                                                                                                                                                  | —                                 |
| 1                  | 12/08            | Corrected various errors                                                                                                                                                                                                         | 1–15, 17–21                       |
| 2                  | 8/09             | Added MAX9736D and automotive parts numbers and updated the <i>Absolute Maximum Ratings</i> section                                                                                                                              | 1, 2, 3, 4, 13,<br>15, 19, 20, 21 |
| 3                  | 9/09             | Corrected error in <i>Absolute Maximum Ratings</i> , <i>Pin Description</i> , <i>Typical Application Circuit for Stereo Output Configuration</i> , and <i>Typical Application Circuit for Single (Mono) Output Configuration</i> | 2, 12, 17, 18                     |

MAX9736

Maxim cannot assume responsibility for use of any circuitry other than circuitry entirely embodied in a Maxim product. No circuit patent licenses are implied. Maxim reserves the right to change the circuitry and specifications without notice at any time.

**Maxim Integrated Products, 120 San Gabriel Drive, Sunnyvale, CA 94086 408-737-7600** \_\_\_\_\_ **25**