

#5248 - 24 AWG 19 Pair Foil Shield cUL 2464 PVC



Part NO: #5248

Product Code: RGW-1949

Product Description

Application:

Computer Cable for EIA RS-232 Applications
Multi-construction
19 Pair

Construction

	Tinned Copper
Construction	T0.20±0.008×7
Stranded Dia.(mm)	0.61
Insulation	PVC
Thickness(mm)	0.25
Insulation Dia.(mm)	1.10
Insulation Color	Red/Black,White/Black, Green/Black,Blue/Black, Red / Yellow, Red / Brown, Black/Yellow, Black / Brown Red / Orange, Green/ White Black/Orange, Red/White Green / Blue, Green/Yellow Red/Green, Red/Blue Green/Brown, Green/Orange White/Blue
Al-Pet Shield	≥125%

Drain wire

	Tinned Copper
Construction	T0.20±0.008×7
Jacket Color	PVC
Thickness(mm)	0.90
Dia.(mm)	11.4±0.15
Jacket Color	

Marking

Exxxxxx #5248 19PR 24 AWG SHIELDED 75C (UL) TYPE CM or
AWM 2464 or c(UL) 60C TYPE CMG FT4 CE ROHS

PACKAGING


100M/Wooden Drum

RoHS GUIDELINE			
We operate according to the following standards			
Control Item	Standard	Testing Method	Testing Equipment
Cadmium content (Cd)	<0.01%	EN1122	ICP-AES
Lead content (Pb)	<0.1%	EPA3050B	ICP-AES
Mercury content (Hg)	<0.1%	EPA3052	ICP-AES
Chromium (VI) content	<0.1%	EPA3060(UN-VIS)	ICP-AES
Polybrominated Biphenyls (PBB)	Forbidden	GC/MS	
Polybrominated Diphenyl Ether (PBDE)	Forbidden	GC/MC	

Revision History

A0-1

Design

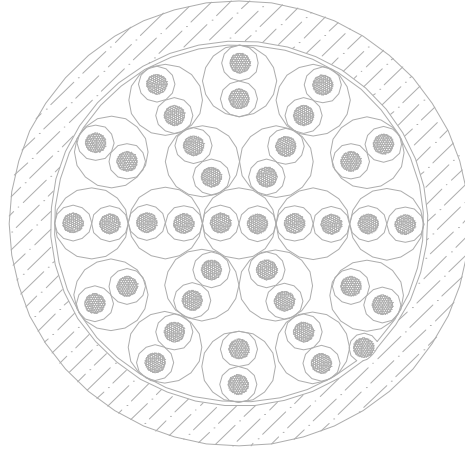

Electrical Characteristics

Max.Conductor DC Resistance at 20°C (Ω /Km)	<84.8
Rated Temperature(°C)	-30 to 80
Rated Voltage(V)	300 RMS
Min.Insulation DC Resistance at 20°C (M Ω *Km)	>200
Capacitance Cond to Cond. (pF/m)	98.43
Capacitance Cond to Shield. (pF/m)	164.05
Velocity of Propogation	60%
Nom Characteristic Impedance	75 Ohms
Nom Inductance (μH/m)	0.61
Max Recommended Current Amps@25C	1.5
UL Style	AWM/STYLE 2464 80 C /300VRMS CM 75C
CSA	c(UL) Type CMG 60C FT4
CE	EU Low Voltage Directive 2006/95/EC

Date: 2013-04-22

Page: 1 / 1