

Miniature solid-state relay - OPT-60DC/ 48DC/100 - 2966621

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://download.phoenixcontact.com>)

Plug-in miniature solid-state relay, input solid-state relay, input: 60 V DC, output: 3 - 48 V DC/100 mA




The illustration shows the version OPT-24DC/48DC/100

Why buy this product

- Vibration and shock resistant
- RT III wash tight (comparable with IP67)
- Wear-free and durable
- Can be soldered on PCB
- Zero voltage switch at AC output
- Switching power of up to 24 V DC/5 A



Key commercial data

Packing unit	10 pc
Minimum order quantity	10 pc
GTIN	 4 017918 130473
Weight per Piece (excluding packing)	5.22 g
Custom tariff number	85364110
Country of origin	Hungary

Technical data

Dimensions

Width	5 mm
Height	28 mm
Depth	15 mm

Ambient conditions

Ambient temperature (operation)	-25 °C ... 60 °C
Ambient temperature (storage/transport)	-25 °C ... 70 °C

Miniature solid-state relay - OPT-60DC/ 48DC/100 - 2966621

Technical data

Input data

Nominal input voltage U_N	60 V DC
Input voltage range in reference to U_N	0.9 ... 1.1
Switching threshold "0" signal, voltage	≤ 40 V
Switching threshold "1" signal voltage	≥ 52 V
Typical input current at U_N	3 mA
Typical response time	50 μ s (at U_N)
Typical turn-off time	800 μ s (at U_N)
Transmission frequency	100 Hz

Output data

Output voltage range	3 V DC ... 48 V DC
Limiting continuous current	100 mA
Voltage drop at max. limiting continuous current	≤ 1 V
Output circuit	2-wire, floating
Type of protection	Protection against polarity reversal
	Surge protection
Protective circuit/component	Polarity protection diode

Connection data

Connection method	Plug / solder connection
-------------------	--------------------------

General

Test voltage input/output	2.5 kV (50 Hz, 1 min.)
Mounting position	any
Assembly instructions	In rows with zero spacing
Operating mode	100% operating factor
Name	Standards/regulations
Standards/regulations	IEC 60664
	EN 50178
	IEC 62103
Rated surge voltage / insulation	Basic insulation
Pollution degree	2
Surge voltage category	III

Classifications

eCl@ss

eCl@ss 4.0	27371102
eCl@ss 4.1	27371102
eCl@ss 5.0	27371001
eCl@ss 5.1	27371001
eCl@ss 6.0	27371604

Miniature solid-state relay - OPT-60DC/ 48DC/100 - 2966621

Classifications

eCl@ss

eCl@ss 7.0	27371604
eCl@ss 8.0	27371604

ETIM

ETIM 2.0	EC001504
ETIM 3.0	EC001504
ETIM 4.0	EC001504
ETIM 5.0	EC001504

UNSPSC

UNSPSC 6.01	30211916
UNSPSC 7.0901	39121542
UNSPSC 11	39121542
UNSPSC 12.01	39121542
UNSPSC 13.2	39121542

Approvals

Approvals

Approvals

UL Recognized / cUL Recognized / GOST / GL / UL Recognized / cUL Recognized / cULus Recognized

Ex Approvals

Approvals submitted

Approval details

UL Recognized


cUL Recognized

GOST

Miniature solid-state relay - OPT-60DC/ 48DC/100 - 2966621

Approvals

GL

UL Recognized 

cUL Recognized 

cULus Recognized 

Accessories

Additional products

Relay socket - PLC-BPT- 60DC/21 - 2900279



6.2 mm PLC basic terminal blocks with Push-in connection, 60 V DC input voltage (without relay or optocoupler)

Relay socket - PLC-BSP- 60DC/21 - 2967332



6.2 mm PLC basic terminal blocks with spring-cage connection, 60 V DC input voltage (without relay or optocoupler)

Relay socket - PLC-BSC- 60DC/21 - 2966100



6.2 mm PLC basic terminal blocks with screw connection, 60 V DC input voltage (without relay or optocoupler)

Miniature solid-state relay - OPT-60DC/ 48DC/100 - 2966621

Accessories

Relay socket - PLC-BPT-120UC/21 - 2900280



6.2 mm PLC basic terminal blocks with Push-in connection, 120 V AC input voltage (without relay or optocoupler)

Relay socket - PLC-BSP-120UC/21 - 2967167



6.2 mm PLC basic terminal blocks with spring-cage connection, 120 V AC/DC input voltage (without relay or optocoupler)

Relay socket - PLC-BSC-120UC/21 - 2966032



6.2 mm PLC basic terminal blocks with screw connection, 120 V AC/DC input voltage (without relay or optocoupler)

Relay socket - PLC-BPT-230UC/21 - 2900281



6.2 mm PLC basic terminal blocks with Push-in connection, 230 V AC input voltage (without relay or optocoupler)

Relay socket - PLC-BSP-230UC/21 - 2967183



6.2 mm PLC basic terminal blocks with spring-cage connection, 230 V AC/DC input voltage (without relay or optocoupler)

Miniature solid-state relay - OPT-60DC/ 48DC/100 - 2966621

Accessories

Relay socket - PLC-BSC-230UC/21 - 2966045



6.2 mm PLC basic terminal blocks with screw connection, 230 V AC/DC input voltage (without relay or optocoupler)

Relay socket - PLC-BPT-120UC/ 1/SEN - 2900451



6.2 mm PLC sensor basic terminal block with sensor supply voltage distribution (BB), Push-in connection, 120 V AC/DC input voltage, without relay or solid-state relay. Note: if fitted with a PDT relay, only the N/O contact is led out.

Relay socket - PLC-BSP-120UC/ 1/SEN - 2967154



6.2 mm PLC sensor basic terminal block with sensor supply voltage distribution (BB), spring-cage connection, 120 V AC/DC input voltage, without relay or solid-state relay. Note: if fitted with a PDT relay, only the N/O contact is led out.

Relay socket - PLC-BSC-120UC/ 1/SEN - 2966074



6.2 mm PLC sensor basic terminal block with sensor supply voltage distribution (BB), screw connection, 120 V AC/DC input voltage, without relay or solid-state relay. Note: if fitted with a PDT relay, only the N/O contact is led out.

Relay socket - PLC-BPT-230UC/ 1/SEN - 2900452



6.2 mm PLC sensor basic terminal block with sensor supply voltage distribution (BB), Push-in connection, 230 V AC/DC input voltage, without relay or solid-state relay. Note: if fitted with a PDT relay, only the N/O contact is led out.

Miniature solid-state relay - OPT-60DC/ 48DC/100 - 2966621

Accessories

Relay socket - PLC-BSP-230UC/ 1/SEN - 2967170



6.2 mm PLC sensor basic terminal block with sensor supply voltage distribution (BB), spring-cage connection, 230 V AC/DC input voltage, without relay or solid-state relay. Note: if fitted with a PDT relay, only the N/O contact is led out.

Relay socket - PLC-BSC-230UC/ 1/SEN - 2966087



6.2 mm PLC sensor basic terminal block with sensor supply voltage distribution (BB), screw connection, 230 V AC/DC input voltage, without relay or solid-state relay. Note: if fitted with a PDT relay, only the N/O contact is led out.

Relay socket - PLC-BPT-120UC/21/SO46 - 2900453



6.2 mm PLC basic terminal blocks with push-in connection and integrated RCZ filter against interference currents/voltages on the control side, input voltage 120 V AC (without relay or optocoupler)

Relay socket - PLC-BSP-120UC/21/SO46 - 2980351



6.2 mm PLC basic terminal blocks with spring-cage connection and integrated RCZ filter against interference currents and voltages on the control side, 120 V AC input voltage (without relay or optocoupler)

Relay socket - PLC-BSC-120UC/21/SO46 - 2980319



6.2 mm PLC basic terminal blocks with screw connection and integrated RCZ filter against interference currents and voltages on the control side, 120 V AC input voltage (without relay or optocoupler)

Miniature solid-state relay - OPT-60DC/ 48DC/100 - 2966621

Accessories

Relay socket - PLC-BPT-230UC/21/SO46 - 2900455



6.2 mm PLC basic terminal blocks with push-in connection and integrated RCZ filter against interference currents/ voltages on the control side, input voltage 230 V AC (without relay or optocoupler)

Relay socket - PLC-BSP-230UC/21/SO46 - 2980377



6.2 mm PLC basic terminal blocks with spring-cage connection and integrated RCZ filter against interference currents and voltages on the control side, 230 V AC input voltage (without relay or optocoupler)

Relay socket - PLC-BSC-230UC/21/SO46 - 2980335



6.2 mm PLC basic terminal blocks with screw connection and integrated RCZ filter against interference currents and voltages on the control side, 230 V AC input voltage (without relay or optocoupler)

Relay socket - PLC-BPT-120UC/ 1/SEN/SO46 - 2900456



6.2 mm PLC sensor basic terminal block with RCZ filter against interference currents and voltages on the control side, with sensor supply voltage distribution (BB), push-in connection, 120 V AC input voltage (without relay or solid-state relay)

Relay socket - PLC-BSP-120UC/ 1/SEN/SO46 - 2980364



6.2 mm PLC sensor basic terminal block with RCZ filter against interference currents and voltages on the control side, with sensor supply voltage distribution (BB), spring-cage connection, 120 V AC input voltage (without relay or solid-state relay)

Miniature solid-state relay - OPT-60DC/ 48DC/100 - 2966621

Accessories

Relay socket - PLC-BSC-120UC/ 1/SEN/SO46 - 2980322



6.2 mm PLC sensor basic terminal block with RCZ filter against interference currents and voltages on the control side, with sensor supply voltage distribution (BB), screw connection, 120 V AC input voltage (without relay or solid-state relay)

Relay socket - PLC-BPT-230UC/ 1/SEN/SO46 - 2900457



6.2 mm PLC sensor basic terminal block with RCZ filter against interference currents and voltages on the control side, with sensor supply voltage distribution (BB), push-in connection, 230 V AC input voltage (without relay or solid-state relay)

Relay socket - PLC-BSP-230UC/ 1/SEN/SO46 - 2980380



6.2 mm PLC sensor basic terminal block with RCZ filter against interference currents and voltages on the control side, with sensor supply voltage distribution (BB), spring-cage connection, 230 V AC input voltage (without relay or solid-state relay)


Relay socket - PLC-BSC-230UC/ 1/SEN/SO46 - 2980348



6.2 mm PLC sensor basic terminal block with RCZ filter against interference currents and voltages on the control side, with sensor supply voltage distribution (BB), screw connection, 230 V AC input voltage (without relay or solid-state relay)


Drawings

Drilling diagram

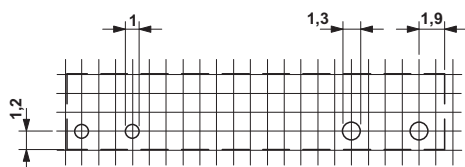

a = pitch division 1.25 mm and 1.27 mm

Diagram



Miniature solid-state relay - OPT-60DC/ 48DC/100 - 2966621

Circuit diagram

