


Verbatim LED GU10 6W 3000K 430lm 3000K Warm White 450 LM DIM



- GU10 Socket
- 220-204V
- 40,000 hours Lifetime
- Dimmable
- 90% Energy Saving
- Luminous Flux: 450 lm
- Equivalent to 61W incandescent bulb

Product Number	52307
General Data	
Lamp Socket	GU10
Electric Data	
Wattage (W)	6.0
Wattage Equivalent (W)	61
Voltage (V)	220-204
Dimmable	yes
Power Factor	≥0.7
Operating Frequency (Hz)	50/60
Geometric Data	
Length (mm)	56
Diameter (in mm)	50
Weight (g)	55
Photometric Data	
Luminous Flux (lm)	450
Luminous Flux 90° Cone (lm)	430
CRI	80
CCT (K)	3000
Luminous Intensity (cd)	1100
Beam Angle (°)	35
Luminous Efficacy (lm/W)	75
Lifetime (hrs)	40,000
Switching Cycle	100,000

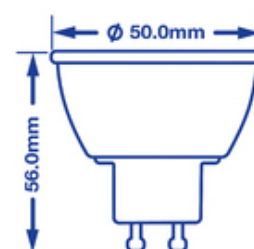

28/11/2014


Photometric Diagrams

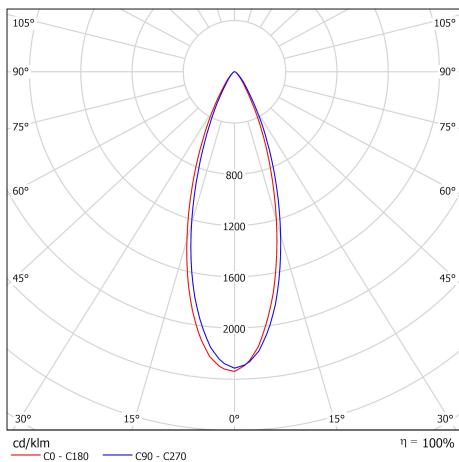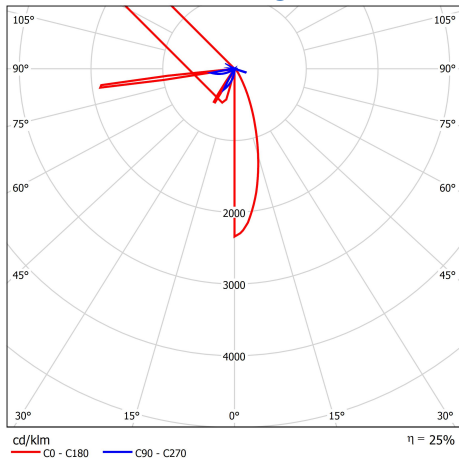

Distance [m]	Cone Diameter [m]	E(0°)	E(C90)	E(C0)	Illuminance [lx]
0.5	0.32	4475	17.6°	1925	1990
	0.29	16.1°	497		
1.0	0.63	1119	17.6°	481	497
	0.58	16.1°	214	221	
1.5	0.95	497	17.6°	214	221
	0.87	16.1°	280	120	
2.0	1.27	280	17.6°	120	124
	1.15	16.1°	179	77	
2.5	1.59	179	17.6°	53	80
	1.44	16.1°	124	55	
3.0	1.90	124	17.6°	53	55
	1.73	16.1°			

Distance [m] Cone Diameter [m] Illuminance [lx]
 — C0 - C180 (Half-value Angle: 32.2°)
 — C90 - C270 (Half-value Angle: 35.2°)

Energy Rating

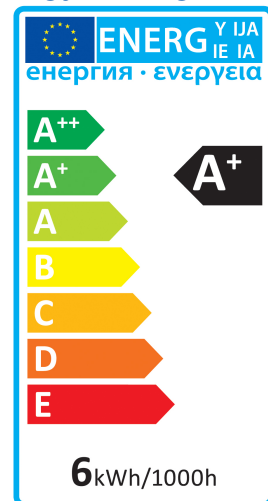

Technical Packaging Details

Barcode

023942523079

EAN 128

(02)00023942523079(37)10(91)814

EAN 14

50023942523074

Pack Dimensions(HxWxL)

H67 *W51*L51mm (mm)

MOQ

10

Carton Dimensions (HxWxL)

H97*W125 *L285mm (mm)

Cartons/Pallet

171

Layers/Pallet

9

Units/Pallet

1710

28/11/2014