

# LM336Z5

## Programmable Shunt Regulator


### Features

- Low Temperature Coefficient
- Adjustable 4 V to 6 V
- Wide Operating Range Current: 10 mA to 400 mA
- Three Lead Transistor Package (TO-92)
- 0.6  $\Omega$  Dynamic Impedance
- $\pm 1.0\%$  Initial Tolerance Available
- Guaranteed Temperature Stability
- Easily Trimmed for Minimum Temperature Drift
- Fast Turn On

### Description

The LM336Z5 integrated circuit is precision 5.0 V shunt regulator. The monolithic  $I_C$  voltage reference operates as a low temperature coefficient 5.0 V Zener with 0.6  $\Omega$  dynamic impedance. A third terminal on the LM336Z5 allows the reference voltage and temperature coefficient to be trimmed.

The LM336Z5 is useful as a precision 5.0 V low-voltage reference, which makes it convenient to obtain a stable reference from low-voltage supplies. Further, since the LM336Z5 operates as shunt regulator, it can be used as either a positive or negative voltage reference.



### Ordering Information

| Part Number | Operating Temperature Range | Top Mark | Package | Packing Method |
|-------------|-----------------------------|----------|---------|----------------|
| LM336Z5     | 0 ~ +70°C                   | LM336Z5  | TO-92   | Bulk           |
| LM336Z5X    |                             | LM336Z5  | TO-92   | Tape and Reel  |

## Block Diagram




Figure1. Block Diagram

## Schematic Diagram

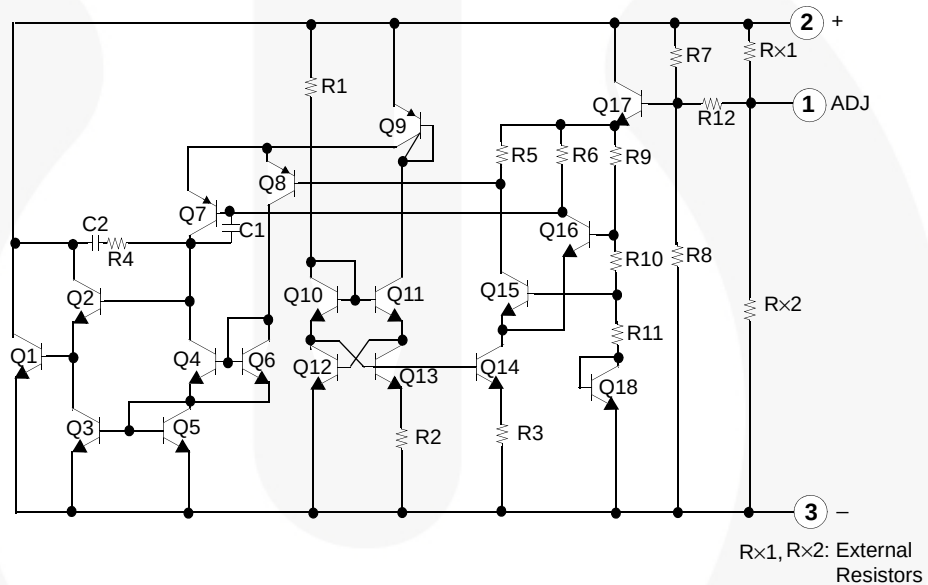


Figure 2. Schematic Diagram

## Absolute Maximum Ratings<sup>(1)</sup>

Stresses exceeding the absolute maximum ratings may damage the device. The device may not function or be operable above the recommended operating conditions and stressing the parts to these levels is not recommended. In addition, extended exposure to stresses above the recommended operating conditions may affect device reliability. The absolute maximum ratings are stress ratings only. Values are at  $T_A = 25^\circ\text{C}$  unless otherwise noted.

| Symbol    | Parameter                   | Value           | Unit             |
|-----------|-----------------------------|-----------------|------------------|
| $I_R$     | Reverse Current             | 15              | mA               |
| $I_F$     | Forward current             | 10              | mA               |
| $T_{OPR}$ | Operating Temperature Range | $0 \sim +70$    | $^\circ\text{C}$ |
| $T_{STG}$ | Storage Temperature Range   | $-60 \sim +150$ | $^\circ\text{C}$ |

### Note:

- The Absolute Maximum Ratings are those values beyond which the safety of the device cannot be guaranteed. The device should not be operated at these limits. The parametric values defined in the Electrical Characteristics tables are not guaranteed at the absolute maximum rating.

**Electrical Characteristics**

$0^{\circ}\text{C} \leq T_A \leq +70^{\circ}\text{C}$  unless otherwise specified.

| Symbol                    | Parameter                                | Conditions                                                                          | LM336Z5 |      |      | Unit     |
|---------------------------|------------------------------------------|-------------------------------------------------------------------------------------|---------|------|------|----------|
|                           |                                          |                                                                                     | Min.    | Typ. | Max. |          |
| $V_R$                     | Reverse Breakdown Voltage                | $T_A = 25^{\circ}\text{C}$ , $I_R = 1\text{ mA}$                                    | 4.8     | 5.0  | 5.2  | V        |
| $\Delta V_R / \Delta I_R$ | Reverse Breakdown Change with Current    | $T_A = 25^{\circ}\text{C}$ ,<br>$600\text{ }\mu\text{A} \leq I_R \leq 10\text{ mA}$ |         | 6    | 20   | mV       |
| $Z_D$                     | Reverse Dynamic Impedance                | $T_A = 25^{\circ}\text{C}$ , $I_R = 1\text{ mA}$                                    |         | 0.6  | 2.0  | $\Omega$ |
| $ST_T$                    | Temperature Stability                    | $I_R = 1\text{ mA}$                                                                 |         | 4    | 12   | mV       |
| $\Delta V_R / \Delta I_R$ | Reverse Breakdown Change with Current    | $600\text{ }\mu\text{A} \leq I_R \leq 10\text{ mA}$                                 |         | 6    | 24   | mV       |
| $Z_D$                     | Reverse Dynamic Impedance                | $I_R = 1\text{ mA}$                                                                 |         | 0.8  | 2.5  | $\Omega$ |
| ST                        | Long Term Stability In Reference Voltage | $I_R = 1\text{ mA}$                                                                 |         | 20   |      | ppm/Khr  |

## Typical Performance Characteristics

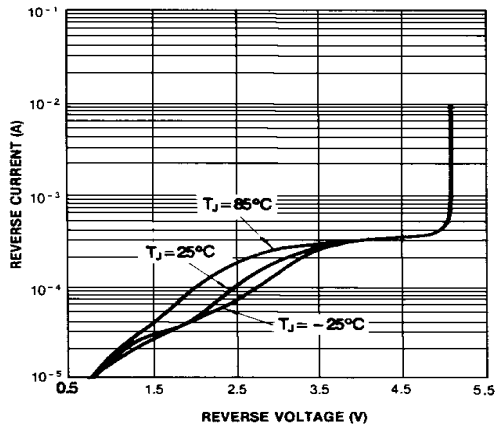


Figure 3. Reverse Characteristics

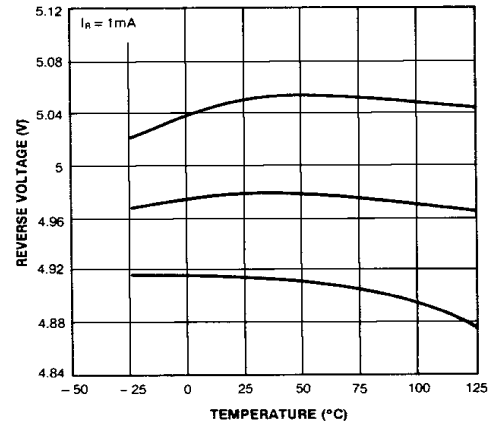


Figure 4. Temperature Drift

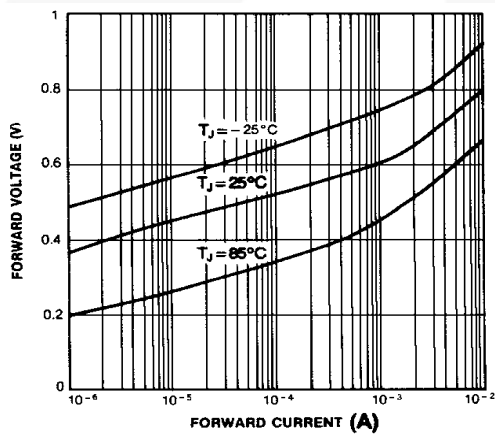


Figure 5. Forward Characteristics


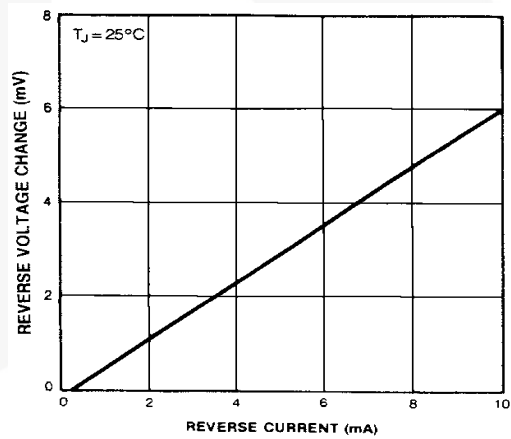


Figure 6. Reverse Voltage Change

## Physical Dimensions

## TO-92 Bulk Type

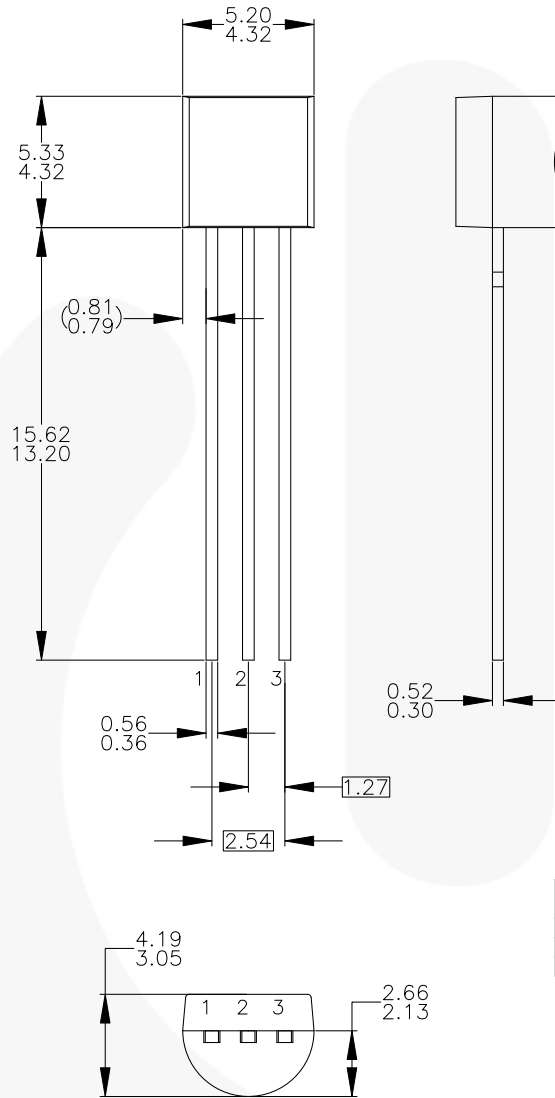

NOTES: UNLESS OTHERWISE SPECIFIED

- A) DRAWING WITH REFERENCE TO JEDEC TO-92 RECOMMENDATIONS.  
 B) ALL DIMENSIONS ARE IN MILLIMETERS.  
 C) DRAWING CONFORMS TO ASME Y14.5M-1994.  
 D) TO-92 (92,94,96,97,98) PIN CONFIGURATION:

| PIN | 92 | 94 | 96 | 97 | 98 |
|-----|----|----|----|----|----|
| 1   | E  | S  | E  | S  | B  |
| 2   | B  | D  | G  | C  | E  |
| 3   | C  | G  | D  | B  | S  |

LEGEND:

P - BIPOLAR      E - EMITTER      D - DRAIN  
 F - JFET          B - BASE          S - SOURCE  
 M - DMOS          C - COLLECTOR      G - GATE

- E) FOR PACKAGE 92, 94, 96, 97 AND 98:  
 PIN CONFIGURATION DRAIN "D" AND SOURCE "S"  
 ARE INTERCHANGEABLE AT JFET "F" OPTION.  
 F) DRAWING FILENAME: MKT-ZA03DREV3.

Figure 17. 3-Lead, TO-92, Molded, Standard Straight Lead

Package drawings are provided as a service to customers considering Fairchild components. Drawings may change in any manner without notice. Please note the revision and/or date on the drawing and contact a Fairchild Semiconductor representative to verify or obtain the most recent revision. Package specifications do not expand the terms of Fairchild's worldwide terms and conditions, specifically the warranty therein, which covers Fairchild products.

Always visit Fairchild Semiconductor's online packaging area for the most recent package drawings:

<http://www.fairchildsemi.com/packaging/>.

## Physical Dimensions (Continued)

## TO-92 Tape and Reel Type

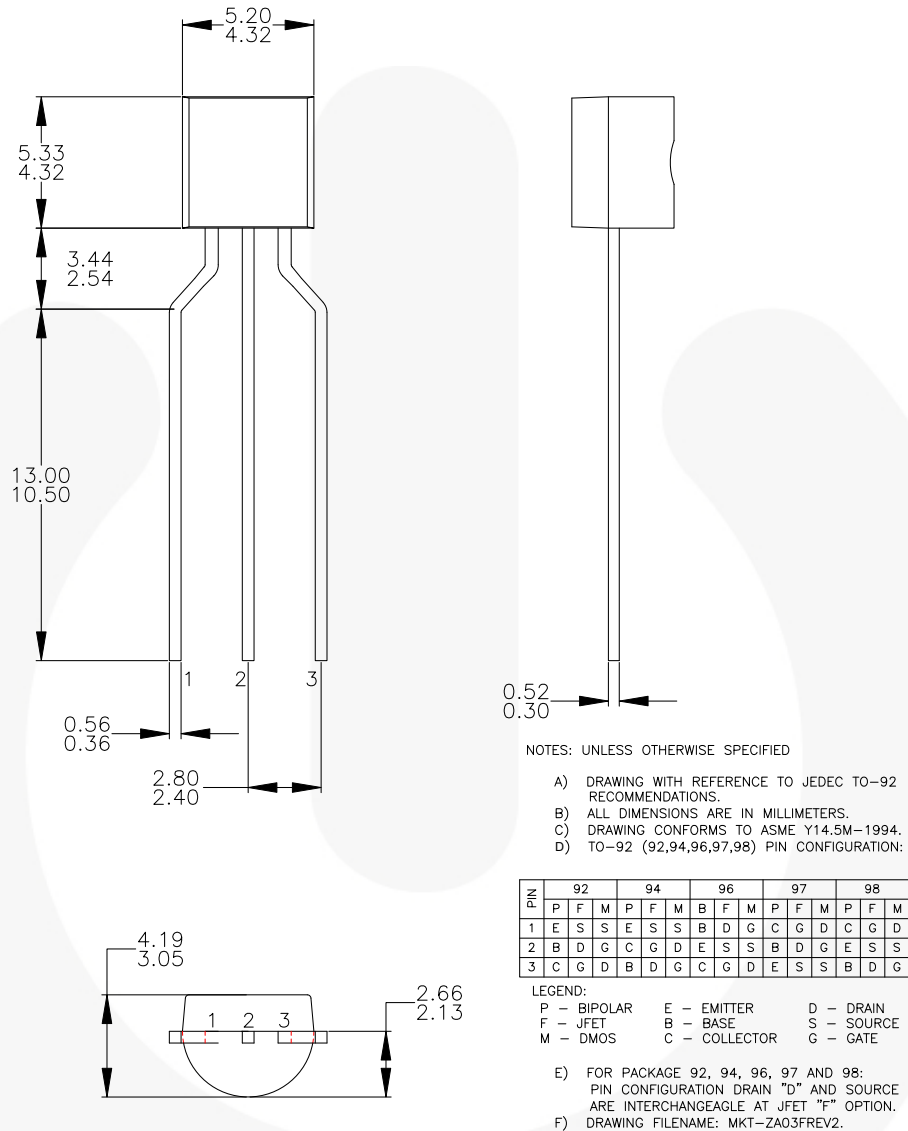


Figure 18. 3-Lead, TO-92, Molded, 0.200 in Line Spacing Lead Form

Package drawings are provided as a service to customers considering Fairchild components. Drawings may change in any manner without notice. Please note the revision and/or date on the drawing and contact a Fairchild Semiconductor representative to verify or obtain the most recent revision. Package specifications do not expand the terms of Fairchild's worldwide terms and conditions, specifically the warranty therein, which covers Fairchild products.

Always visit Fairchild Semiconductor's online packaging area for the most recent package drawings:

<http://www.fairchildsemi.com/packaging/>.

For current tape and reel specifications, visit Fairchild Semiconductor's online packaging area:

[http://www.fairchildsemi.com/products/discrete/pdf/to92\\_tr.pdf](http://www.fairchildsemi.com/products/discrete/pdf/to92_tr.pdf).



## TRADEMARKS

The following includes registered and unregistered trademarks and service marks, owned by Fairchild Semiconductor and/or its global subsidiaries, and is not intended to be an exhaustive list of all such trademarks.

|                                                                                              |                                                |                                                                                                                         |                                                                                             |
|----------------------------------------------------------------------------------------------|------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------|
| 2Cool™                                                                                       | F-PFS™                                         | PowerTrench®                                                                                                            | The Power Franchise®                                                                        |
| AccuPower™                                                                                   | FRFET®                                         | PowerXS™                                                                                                                | the power franchise                                                                         |
| AX-CAP™*                                                                                     | Global Power Resource™                         | Programmable Active Droop™                                                                                              | TinyBoost™                                                                                  |
| BitSiC™                                                                                      | GreenBridge™                                   | QFET®                                                                                                                   | TinyBuck™                                                                                   |
| Build it Now™                                                                                | Green FPS™                                     | QS™                                                                                                                     | TinyCalc™                                                                                   |
| CorePLUS™                                                                                    | Green FPS™ e-Series™                           | Quiet Series™                                                                                                           | TinyLogic®                                                                                  |
| CorePOWER™                                                                                   | Gmax™                                          | RapidConfigure™                                                                                                         | TINYOPTO™                                                                                   |
| CROSSVOLT™                                                                                   | GTO™                                           |  Saving our world, 1mW/W/kW at a time™ | TinyPower™                                                                                  |
| CTL™                                                                                         | IntelliMAX™                                    | SignalWise™                                                                                                             | TinyPWM™                                                                                    |
| Current Transfer Logic™                                                                      | ISOPLANAR™                                     | SmartMax™                                                                                                               | TinyWire™                                                                                   |
| DEUXPEED®                                                                                    | Making Small Speakers Sound Louder and Better™ | SMART START™                                                                                                            | TranSiC™                                                                                    |
| Dual Cool™                                                                                   | MegaBuck™                                      | Solutions for Your Success™                                                                                             | TriFault Detect™                                                                            |
| EcoSPARK®                                                                                    | MICROCOUPLER™                                  | SPM®                                                                                                                    | TRUECURRENT®*                                                                               |
| EfficientMax™                                                                                | MicroFET™                                      | STEALTH™                                                                                                                | μSerDes™                                                                                    |
| ESBC™                                                                                        | MicroPak™                                      | SuperFET®                                                                                                               |  SerDes® |
|  Fairchild® | MicroPak2™                                     | SuperSOT™-3                                                                                                             | UHC™                                                                                        |
| Fairchild Semiconductor®                                                                     | MillerDrive™                                   | SuperSOT™-6                                                                                                             | Ultra FRFET™                                                                                |
| FACT Quiet Series™                                                                           | MotionMax™                                     | SuperSOT™-8                                                                                                             | UniFET™                                                                                     |
| FACT®                                                                                        | mWSaver™                                       | SupreMOS®                                                                                                               | VCX™                                                                                        |
| FAST®                                                                                        | OptoHiT™                                       | SyncFET™                                                                                                                | VisualMax™                                                                                  |
| FastvCore™                                                                                   | OPTOLOGIC®                                     | Sync-Lock™                                                                                                              | VoltagePlus™                                                                                |
| FETBench™                                                                                    | OPTOPLANAR®                                    |  SYSTEM GENERAL®*                      | XS™                                                                                         |
| FPS™                                                                                         |                                                |                                                                                                                         |                                                                                             |

\* Trademarks of System General Corporation, used under license by Fairchild Semiconductor.

## DISCLAIMER

FAIRCHILD SEMICONDUCTOR RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY, FUNCTION, OR DESIGN. FAIRCHILD DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT DESCRIBED HEREIN; NEITHER DOES IT CONVEY ANY LICENSE UNDER ITS PATENT RIGHTS, NOR THE RIGHTS OF OTHERS. THESE SPECIFICATIONS DO NOT EXPAND THE TERMS OF FAIRCHILD'S WORLDWIDE TERMS AND CONDITIONS, SPECIFICALLY THE WARRANTY THEREIN, WHICH COVERS THESE PRODUCTS.

## LIFE SUPPORT POLICY

FAIRCHILD'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF FAIRCHILD SEMICONDUCTOR CORPORATION.

As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body or (b) support or sustain life, and (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury of the user.
2. A critical component in any component of a life support, device, or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

## ANTI-COUNTERFEITING POLICY

Fairchild Semiconductor Corporation's Anti-Counterfeiting Policy. Fairchild's Anti-Counterfeiting Policy is also stated on our external website, [www.fairchildsemi.com](http://www.fairchildsemi.com), under Sales Support.

Counterfeiting of semiconductor parts is a growing problem in the industry. All manufacturers of semiconductor products are experiencing counterfeiting of their parts. Customers who inadvertently purchase counterfeit parts experience many problems such as loss of brand reputation, substandard performance, failed applications, and increased cost of production and manufacturing delays. Fairchild is taking strong measures to protect ourselves and our customers from the proliferation of counterfeit parts. Fairchild strongly encourages customers to purchase Fairchild parts either directly from Fairchild or from Authorized Fairchild Distributors who are listed by country on our web page cited above. Products customers buy either from Fairchild directly or from Authorized Fairchild Distributors are genuine parts, have full traceability, meet Fairchild's quality standards for handling and storage and provide access to Fairchild's full range of up-to-date technical and product information. Fairchild and our Authorized Distributors will stand behind all warranties and will appropriately address any warranty issues that may arise. Fairchild will not provide any warranty coverage or other assistance for parts bought from Unauthorized Sources. Fairchild is committed to combat this global problem and encourage our customers to do their part in stopping this practice by buying direct or from authorized distributors.

## PRODUCT STATUS DEFINITIONS

### Definition of Terms

| Datasheet Identification | Product Status        | Definition                                                                                                                                                                                          |
|--------------------------|-----------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Advance Information      | Formative / In Design | Datasheet contains the design specifications for product development. Specifications may change in any manner without notice.                                                                       |
| Preliminary              | First Production      | Datasheet contains preliminary data; supplementary data will be published at a later date. Fairchild Semiconductor reserves the right to make changes at any time without notice to improve design. |
| No Identification Needed | Full Production       | Datasheet contains final specifications. Fairchild Semiconductor reserves the right to make changes at any time without notice to improve the design.                                               |
| Obsolete                 | Not In Production     | Datasheet contains specifications on a product that is discontinued by Fairchild Semiconductor. The datasheet is for reference information only.                                                    |

Rev. I63