

Compact Circuit Protector (CCP)

UL Class CC, CF (CUBEFuse™), Midget and IEC 10x38mm
DIN-Rail Fused Disconnect Switches



Contents

Description	Page	Description	Page
1-, 2- and 3-Pole — Class CC, Midget, 10x38mm		Auxiliary Contacts	
Description & Specifications	2-3	Description & Specifications	8
Available Fuses	3	Dimensions	8
Recommended Lockout Devices	3	PLC Fuse Monitor	
Dimensions	3	Description & Specifications.	9
Motor Sizing Table.	4	Wiring Schematic	10
1-, 2- and 3-Pole — Class CF		Connections.	10
Description & Specifications	5-6	Dimensions	11
Available Fuses	6		
Recommended Lockout Devices	6		
Dimensions	6		
Motor Sizing Tables.	7		

1-, 2- and 3-Pole — Class CC, Midget, 10x38mm

Description

The revolutionary Bussmann Compact Circuit Protector (CCP) fused disconnect switch is 2/3 the footprint of a traditional fusible switch and can provide up to a high 200kA SCCR that can help improve assembly SCCR.

Specifications

Ratings

- | | |
|-------|---|
| Volts | - 600Vac (Class CC) |
| | - 240Vac (Midget UL) |
| | - 400Vac (Midget IEC) |
| | - 80Vdc (DC Class CC/UL, DC Midget/IEC) |
| Amps | - 30A (UL) |
| | - 32A (IEC) |
| SCCR | - 200kA (Class CC) |
| | - 10kA (Midget UL) |
| | - 120kA (Midget IEC max) |
| | - 20kA (DC Class CC/UL) |
| | - 10kA (DC Midget/IEC) |

Poles

- 1-, 2- and 3-pole versions

Agency information

- CE Compliant
- RoHS Compliant
- For Class CC fuse versions
 - UL 98 Listed, File E302370, Guide WHTY
 - cULus to CSA Standard 22.2 No. 4-04, File 302370, Guide WHTY7
- For UL Midget and 10X38 IEC fuse versions
 - UL 508 Listed, File E320230, Guide NRNT
 - cULus Certified 22.2 No. 14-05
 - IEC 60947-3 AC23A
 - IEC 60947-3 DC23A

Conductors 75°C Cu or higher

- Single/dual 18-6AWG solid or stranded
- Single 4AWG solid or stranded

Terminals

- Single/dual conductor box lug or spade terminal suitable for line, load or accessory connection

Torque

- 18-10AWG 20 Lb-In
- 8-4AWG 35 Lb-In



1-Pole DC CCP

Storage and operating temperature

- -20°C to 75°C*

* For fuse performance under or above 25°C, consult fuse performance derating charts in the Bussmann publication titled Selecting Protective Devices (SPD), reorder # 3002.

Flammability rating

- UL 94V0

Lockout/tagout provisions

- 4mm shank lock or Brady pin-out device part number 90850

Mounting

- 35mm DIN-Rail

Local open fuse indication minimum voltage**

- 90Vac for AC versions
- 12Vdc for DC versions

** Open fuse indication requires an open fuse to be in the CCP and the switch in the ON position.

Accessories

- Auxiliary contacts
- PLC Wired remote fuse indication

Shipping weight

- 2.84 lbs (1.29 kg) per carton

Carton quantity

- 12 poles

Features

- Extremely compact design at 17.5mm wide per pole
- High Short-Circuit Current Ratings up to 200kA (UL) and 120kA (IEC)
- Disconnect rated to provide means for load isolation
- Full voltage rated up to 600Vac or 80Vdc
- Class CC version is UL 98 Listed and horsepower rated, and suitable for branch circuit disconnect and branch circuit protection
- IEC 10x38 version complies with IEC 60947-3 and suitable for branch circuit disconnect and branch circuit protection
- Suitable for global installations, the units comply with UL, cULus, and IEC standards accepting UL Class CC, Midget or IEC aM and gG/gL fuses
- Open Fuse Indication:
 - Local fuse indication lights are standard
 - Optional wired remote open fuse indication can be utilized to signal a PLC and open a contactor to de-energize all phases, if required
- IP20 Finger-safe with 10AWG (6mm²) or larger wire
- Built-in switch interlock prohibits removing the fuse under load
- Padlockable handle for lockout/tagout procedures - recommend using Brady pin-out device part number 90850

Compact Circuit Protector (CCP)
 UL Class CC, CF (CUBEFuse), Midget and IEC 10x38mm
 Fused Disconnect Switches

Technical Data 1157
 Effective August 2014

Specifications

Amp Rating	Fuse Class	No. of Poles	Volts	SCCR	Max Horsepower Rating				Wire Size/ (Torque ^{†††})	Wire Type	Part Number	Agency Information
					120 Vac	240 Vac	480 Vac	600 Vac				
30	CC	1	600Vac	200kA	0.5	—	—	—	Single/Dual 18-6AWG Sol/Str	CCP-1-30CC	UL 98 Listed, cULus 22.2, No. 4-04	
30	CC	2	600Vac	200kA	—	2	—	—		CCP-2-30CC	UL 98 Listed, cULus 22.2, No. 4-04	
30	CC	3	600Vac	200kA	—	3	4	7.5		CCP-3-30CC	UL 98 Listed, cULus 22.2, No. 4-04	
30	UL Midget	1	240Vac [†]	10kA [†]	—	—	—	—	Single 4AWG Sol/Str	CCP-1-30M	UL 508 Listed, cULus 22.2, No. 14-05 IEC 60947-3, AC23A	
32*	10x38 IEC		400Vac [†]	120kA [†]	—	—	—	—				
30	UL Midget	2	240Vac [†]	10kA [†]	—	—	—	—	Single 4AWG Sol/Str	CCP-2-30M	UL 508 Listed, cULus 22.2, No. 14-05 IEC 60947-3, AC23A	
32*	10x38 IEC		400Vac [†]	120kA [†]	—	—	—	—				
30	UL Midget	3	240Vac [†]	10kA [†]	—	—	—	—	Spade Terminal ^{††}	CCP-3-30M	UL 508 Listed, cULus 22.2, No. 14-05 IEC 60947-3, AC23A	
32*	10x38 IEC		400Vac [†]	120kA [†]	—	—	—	—				
30	CC	1	80Vdc [†]	20kA [†]	—	—	—	—	—	CCP-1-DCC	UL 98 Listed, CSA 22.2, No. 4-04	
30	CC	1	80Vdc [†]	10kA [†]	—	—	—	—		CCP-1-DCM	UL 508 Listed, cULus 22.2, No. 14-05 IEC 60947-3, DC23A	

* 32A Class aM, 25A Class gG.

† SCCR May be lower, refer to installed fuse data sheets.

†† Spade terminal with a 4.3mm gap for a #8-32 stud, 30A max, insulated flange, wire size 12-10AWG.

††† - 18-10AWG; 20 Lb-In
 - 8-4AWG; 35 Lb-In

Available Bussmann fuses



Fuse Class	Type/Description	Volts	Data Sheet #
CC	LP-CC Time-Delay, Current Limiting	600Vac/300Vdc	1023
CC	FNQ-R Time-Delay	600Vac/300Vdc	1014
CC	KTK-R Fast-Acting	600Vac	1015
M	FNM Time-Delay	250Vac	2028
M	FNQ Time-Delay	500Vac	1012
M	KTK Fast-Acting	600Vac	1011
M	BAF Fast-Acting	250Vac	2011
M	KLM Fast-Acting	600Vac/dc	2020
gG/gL	C10G	500V (400V@32A)	720115
aM	C10M	500V (400V@20@25A)	720115

Recommended lockout device

CCP Version	Brady pin-out device P/N
Class CC, Midget, IEC 10x38	90850

Dimensions – mm (in)

Class CC, UL Midget & 10x38 IEC

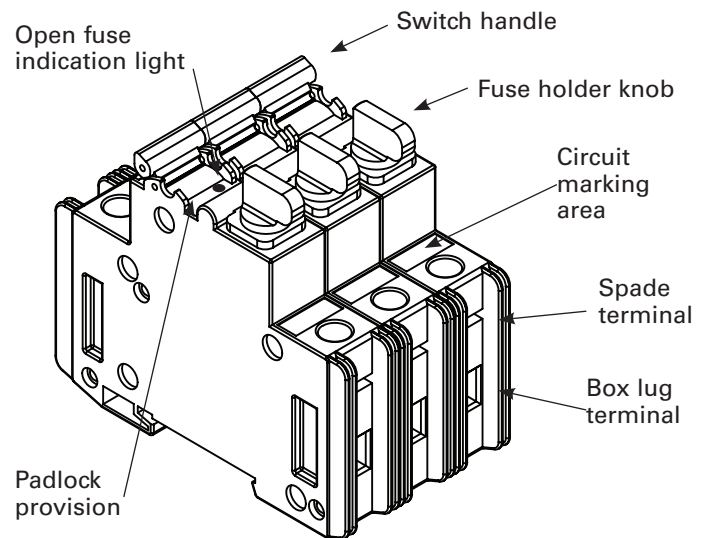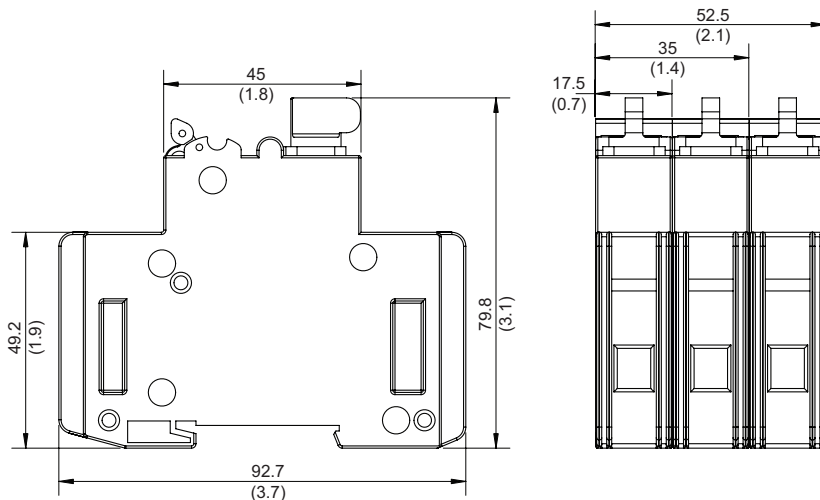

Motor sizing table with LP-CC time-delay Class CC fuses

Voltage	Motor Size (Hp)	Motor FLA (Amps)	Min (Amps)	Code Max (Amps)	Heavy Start (Amps)
115Vac, 1-Phase	0.167	4.4	9	15	15
	0.25	5.8	12	20	20
	0.33	7.2	15	25	25
	0.50	9.8	30	30	30
230Vac, 1-Phase	0.17	2.2	4.5	10	10
	0.25	2.9	6	10	10
	0.33	3.6	7	15	15
	0.50	4.9	10	15	15
	0.75	6.9	15	25	25
	1	8	25	25	30
200Vac, 3-Phase	1.5	10	30	30	30
	0.50	2.5	5	10	10
	0.75	3.7	7.5	15	15
	1	4.8	10	15	15
	1.5	6.9	15	25	25
208Vac, 3-Phase	2	7.8	25	25	30
	0.50	2.4	5	10	10
	0.75	3.5	7	15	15
	1	4.6	10	15	15
230Vac, 3-Phase	1.5	6.6	15	20	25
	2	7.5	15	25	30
	0.50	2.2	4.5	10	10
	0.75	3.2	7	10	12
	1	4.2	9	15	15
460Vac, 3-Phase	1.5	6	12	20	20
	2	6.8	15	25	25
	3	9.6	30	30	30
	0.50	1.1	2.25	6	6
	0.75	1.6	3.2	6	6.25
	1	2.1	4.5	10	10
	1.5	3	6	10	12
575Vac, 3-Phase	2	3.4	7	15	15
	3.00	4.8	10	15	15
	5.00	7.6	25	25	30
	0.50	0.9	1.8	3	3.5
	0.75	1.3	2.8	6	6
	1	1.7	3.5	6	6.25
575Vac, 3-Phase	1.5	2.4	5	10	10
	2	2.7	5.6	10	10
	3.00	3.9	8	15	15
	5.00	6.1	15	20	20
	7.50	9	30	30	30

Note: NEMA motors only (no IEC or Design B Energy Efficient). Minimum size if no more than 1 start/hour. Code max if low to moderate reverse/jog/plug applications.

Heavy start permitted only if Code Max does not allow motor start-up. For high reverse/jog/plug applications or larger horsepower motors, Class CF (Class J electrical performance) fuses are recommended. See CCP_CF with CUBEFuse™.

Compact Circuit Protector (CCP) UL Class CC, CF (CUBEFuse), Midget and IEC 10x38mm Fused Disconnect Switches

Technical Data 1157

Effective August 2014

1-, 2- and 3-Pole — Class CF

Description

The revolutionary Bussmann Compact Circuit Protector (CCP) fused disconnect switch with CUBEFuse is 2/3 the footprint of a traditional fusible switch and provides a high 200kA SCCR that can help increase assembly SCCR.



Specifications

Ratings

- Volts - 600Vac
- 125Vdc (up to 80A max)
- Amps 30A, 60A, 100A
- SCCR - 200kA AC
- 100kA DC (up to 80A max)

Poles

- 1-, 2-, 3-pole

Agency information

- CE Compliant
- RoHS Compliant
- UL 98 Listed, File E302370, Guide WHTY
- cULus to CSA Standard 22.2 No. 4-04, File 302370, Guide WHTY7

Conductors 75°C Cu or higher

- 30 to 60A CCPs: - Single/dual 18-6AWG solid or stranded
- Single 4AWG solid or stranded
- 100A CCPs - Single 10-8AWG solid
- Single 8-1AWG stranded
- Dual 6AWG stranded

Terminals

- Single/dual conductor box lug or spade terminal suitable for line, load or accessory connection
- Torque: 0-60A: - 18-10AWG 20 Lb-In
- 8-6AWG 35 Lb-In
- 4AWG 35 Lb-In
- 70-100A: - 18-10AWG Single 25 Lb-In
- 8-1AWG Single 35 Lb-In
- 6AWG Dual 45 Lb-In

Fuses

- Uses finger-safe Class CF CUBEFuse™ with Class J performance
- Low-Peak™ dual-element, time-delay*
 - Non-indicating 1-100A
 - Indicating 6-100A
- Fast-acting, non-indicating 1-100A**

* See data sheet # 9000.

**See data sheet # 2147.

Storage and operating temperature

- 20°C to 75°C***

***For fuse performance under or above 25°C, consult fuse performance derating charts in the Bussmann publication titled Selecting Protective Devices (SPD) reorder # 3002.

Flammability rating

- UL 94V0

Lockout/tagout provisions

- 4mm shank lock or Brady pin-out device, part number 90850

Mounting

- 35mm DIN-Rail

Local open fuse indication minimum voltage†

- 90Vac/115Vdc

† Open fuse indication requires an open fuse to be in the CCP and the switch in the ON position.

Accessories

- Auxiliary contacts
- PLC Wired remote fuse indication
- CUBEFuse fuse pullers (P/Ns: CFP-30, CFP-60, CFP-100)

Shipping weight

- 2.03 lbs (0.92kg) per carton

Carton quantity

- Six (6) poles

Features

- Uses Class CF finger-safe fast-acting and time-delay CUBEFuse™ with Class J electrical performance
- Extremely compact design at 25.4mm (1 inch) wide per pole
- Ampacity rejecting disconnects will not accept CUBEFuse amp ratings greater than switch rating
- High Short-Circuit Current Ratings at 200kA
- Disconnect rated to provide means for load isolation
- Full voltage rated at 600Vac
- 30A and 60A versions rated 125Vdc
- UL 98 Listed and suitable for branch circuit disconnect and branch circuit protection
- 1-, 2- and 3-pole versions are horsepower rated
- Complies with UL and CSA
- Open Fuse Indication:
 - Local fuse indication lights are standard
 - Optional wired remote open fuse indication can be utilized to signal a PLC and open a contactor to de-energize all phases, if required
- Additional open fuse indication can be provided by the CUBEFuse
- IP20 Finger-safe construction with 10AWG (6mm²) wire or larger
- Built-in switch interlock capability prohibits removing the fuse under load
- Padlockable handle for lockout/tagout procedures - recommend using Brady pin-out device, part number 90850

Specifications

Amp Rating	UL Fuse Class	No. of Poles	Volts	SCCR	Max Horsepower Rating*				Wire Size (See Note for Torque!)	Wire Type	Part Number	Agency Information
					120 Vac	240 Vac	480 Vac	600 Vac				
30	CF	1	600Vac 125Vdc	200kA 100kA	1.5	—	—	—	Single/Dual 18-6AWG Sol/Str	CCP-1-30CF	UL 98 Listed, cULus 22.2, No. 4-04	
30	CF	2	600Vac 125Vdc	200kA 100kA	—	3	—	—		CCP-2-30CF	UL 98 Listed, cULus 22.2, No. 4-04	
30	CF	3	600Vac 125Vdc	200kA 100kA	—	5	15	10	Single 4AWG Sol/Str	CCP-3-30CF	UL 98 Listed, cULus 22.2, No. 4-04	
60	CF	1	600Vac 125Vdc	200kA 100kA	3	—	—	—		CCP-1-60CF	UL 98 Listed, cULus 22.2, No. 4-04	
60	CF	2	600Vac 125Vdc	200kA 100kA	—	7.5	—	—	Spade Terminal**	75°C Cu or higher	CCP-2-60CF	UL 98 Listed, cULus 22.2, No. 4-04
60	CF	3	600Vac 125Vdc	200kA 100kA	—	7.5	20	10		CCP-3-60CF	UL 98 Listed, cULus 22.2, No. 4-04	
100	CF	1	600Vac 125Vdc††	200kA 100kA	5	—	—	—	Single 8-10AWG Sol/Str 8-1AWG Str	CCP-1-100CF	UL 98 Listed, cULus 22.2, No. 4-04	
100	CF	2	600Vac 125Vdc††	200kA 100kA	—	10	—	—		CCP-2-100CF	UL 98 Listed, cULus 22.2, No. 4-04	
100	CF	3	600Vac 125Vdc††	200kA 100kA	—	20	50	50	Spade Terminal**	CCP-3-100CF	UL 98 Listed, cULus 22.2, No. 4-04	

* With time-delay Low-Peak CUBEFuse.

** Spade terminal with a 4.3mm gap for a #8-32 stud, 30A max, insulated flange, wire size 12-10AWG.

† 30-60A: 18-10AWG 20 Lb-In, 8-6AWG 35 Lb-In, 4AWG 35 Lb-In
70-100A: 18-10AWG Single 25 Lb-In, 8-1AWG Single 35 Lb-In, 6AWG Dual 45 Lb-In


†† Up to 80 amps maximum.

Available Bussmann fuses

Fuse Class	Type/Description	Data Sheet #
CF	Low-Peak Time-Delay, Current Limiting 600Vac/300Vdc	9000
CF	UPS/Critical Application, Fast-Acting 600Vac/dc	2147


Recommended lockout devices

CCP Version	Bradly pin-out device P/N
Class CF CUBEFuse™	90850

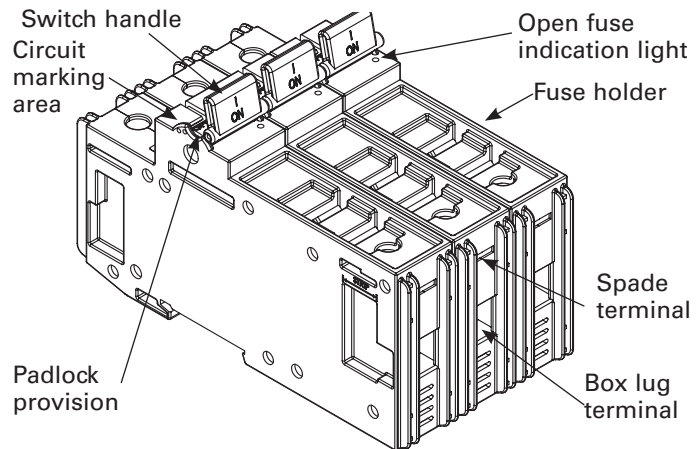


Dimensions – mm (in)

30A and 60A CUBEFuse CCP

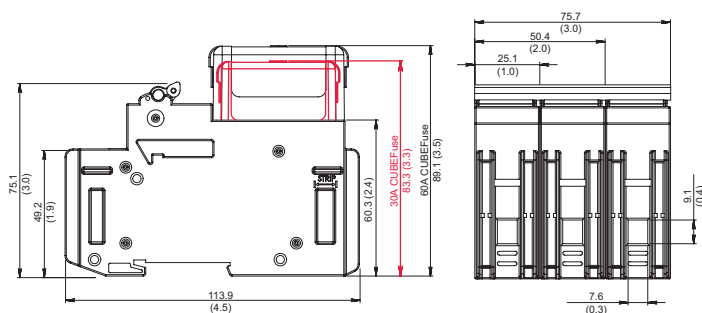

100A CUBEFuse CCP

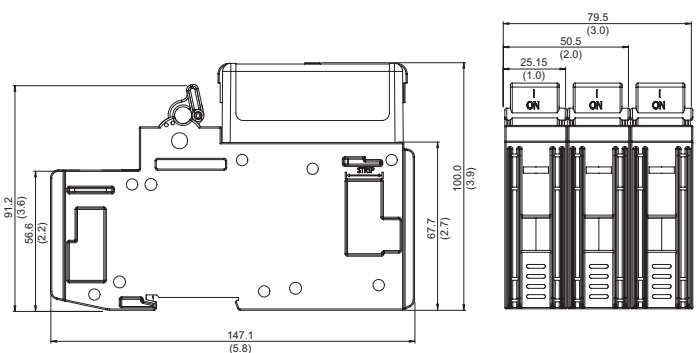

**Motor sizing table
 with TCF Low-Peak™ time-delay Class CF fuses**

Voltage	Motor Size (Hp)	Motor FLA (Amps)	Optimal Protection (Amps)	Code Max (Amps)	Heavy Start (Amps)
115Vac, 1-Phase	0.167	4.4	10	10	10
	0.25	5.8	10	15	15
	0.333	7.2	15	15	15
	0.5	9.8	15	20	20
	0.75	13.8	25	25	30
	1	16	25	30	35
	1.5	20	30	35	45
	2	24	40	45	50
	3	34	50	60	N/A
	5**	56	90	100	N/A
230Vac, 1-Phase	0.167	2.2	6	6	6
	0.25	2.9	6	6	6
	0.333	3.6	6	10	10
	0.5	4.9	10	10	10
	0.75	6.9	15	15	15
	1	8	15	15	17.5
	1.5	10	15	20	20
	2	12	20	25	25
	3	17	25	30	35
	5	28	45	50	60
200Vac, 3-Phase	0.5	2.5	6	6	6
	0.75	3.7	6	10	10
	1	4.8	10	10	10
	1.5	6.9	15	15	15
	2	7.8	15	15	17.5
	3	11	17.5	20	20
	5	17.5	30	35	35
	7.5	25.3	40	45	50
	20**	62.1	100	N/A	N/A
	208Vac, 3-Phase	0.5	2.4	6	6
0.75		3.5	6	10	10
1		4.6	10	10	10
1.5		6.6	10	15	15
2		7.5	15	15	15
3		10.6	17.5	20	20
5		16.7	25	30	35
7.5		24.2	40	45	50
20**		59.4	90	N/A	N/A
230Vac, 3-Phase		0.5	2.2	3	3
	0.75	1.6	3	3	3
	1	2.1	6	6	6
	1.5	3	6	6	6
	2	3.4	6	6	6
	3	4.8	10	10	10
	5	7.6	15	15	15
	7.5	11	17.5	20	20
	10	14	25	25	30
	15	21	35	40	45
460Vac, 3-Phase	20	27	40	50	60
	50**	65	100	N/A	N/A
	0.5	0.9	3	3	3
	0.75	1.3	3	3	3
	1	1.7	3	3	3
	1.5	2.4	6	6	6
	2	2.7	6	6	6
	3	3.9	6	10	10
	5	6.1	10	15	15
	7.5	9	15	20	20
575Vac, 3-Phase	10	11	17.5	20	20
	40**	41	70	80	80

Note: Use Code Max column for low to moderate reverse/jog/plug applications.
 Heavy Start permitted only if Code Max does not allow motor start-up.

* Based on motor FLA from NEC® tables 430.248 and 430.250.

Auxiliary Contacts

Description

NO+NC contact output to indicate the status of the switching mechanism on the CCP.

Specifications

- Rated Ampacity: 5A
- Rated Voltage: 240Vac
- NC/NO contacts are closed/open when the CCP switch is in the "ON" position (closed)
- Flammability Rating: UL 94V0

Agency information

- UL 98 File E155130, Guide WHY2
- cULus to CSA Standard 22.2 No. 4-04
- IEC 60947-5-1

Wiring

- 20-16AWG (0.5 to 1.5mm²) wire
- Torque 5 Lb-In (0.68N•m)
- For use with only 75°C Cu wire

Packaging

- The CCP-AUX and CCP-AUX-100 are packaged individually
- A single unit is capable of mounting to a 1-, 2-, or 3-pole CCP

Installation technique

- Mounts on the right side ONLY of the CCP, and mechanically interlocks with the CCP switch handle with hardware provided

IP20 Rating

- Yes

Environmental data

- Storage and operating temperature: -20°C to 75°C

Catalog numbers

- 1-60A, CCP-AUX
- 70-100A, CCP-AUX-100

Description	Max Per CCP	Signal Output	Agency Information	Catalog Number
Auxiliary Contacts NO+NC for Switch Status up to 60A	1 per CCP (1-, 2- or 3-Pole)	5A/240Vac	UL 98 Recognized, cURus 22.2 No. 4-04, IEC 60947-5-1 AC15	CCP-AUX
Auxiliary Contacts NO+NC for Switch Status 70 to 100A	1 per CCP (1-, 2- or 3-Pole)	5A/240Vac	UL 98 Recognized, CSA C22.2 No. 4	CCP-AUX-100


De-energize all circuits before installing or removing any CCP-AUX devices and follow all prescribed safety procedures.



Installed on a CCP-3-xx


Up to 60A CCP

70 to 100A CCP

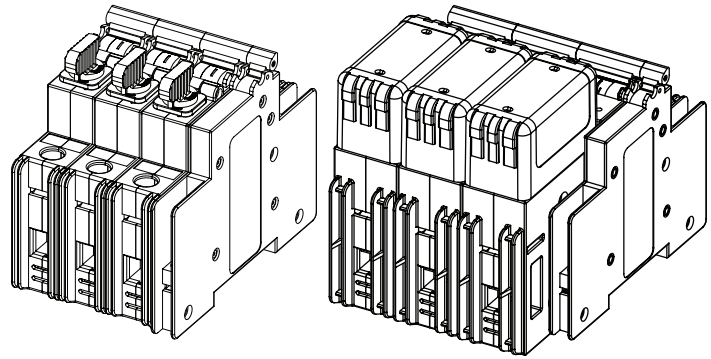


Dimensions – mm (in)

Up to 60A CCP

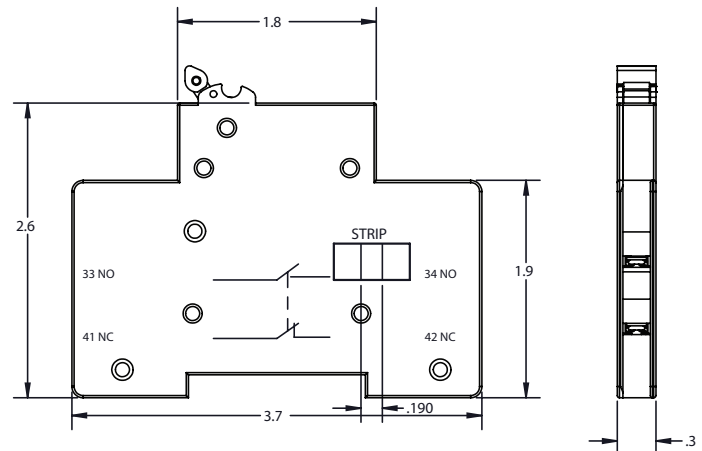


70 to 100A CCP

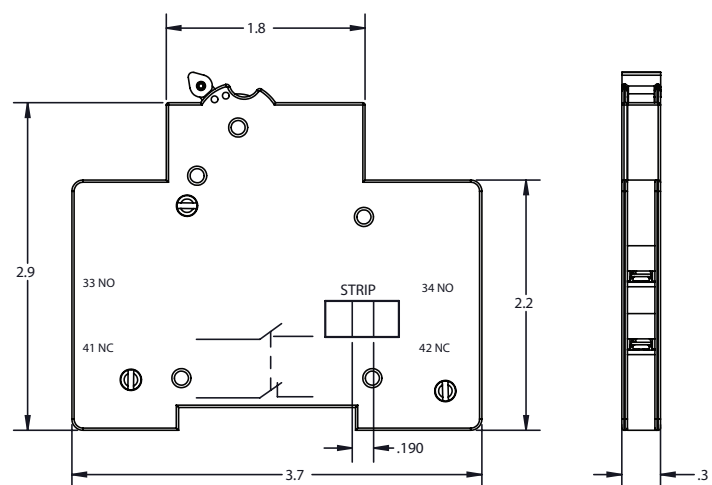

PLC Fuse Monitor

Description

A resettable three-phase fuse monitor that integrates with the I/O card in a Programmable Logic Controller (PLC).

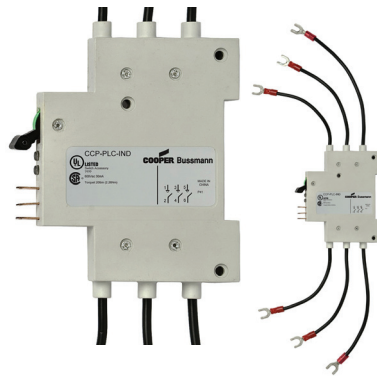

Specifications

- Signal output to PLC:
 - +24Vdc, 10mA max
- Output signals:
 - Digital 0Vdc (Low), 24Vdc max (High)
 - - 0Vdc Low – Fuse is good
 - - 24Vdc High – Fuse has opened

When the fuse opens, the output signal is sent high and will remain high until the unit is reset.

Agency information

- UL 98 File E155130, Guide WHTY2
- cULus to CSA Standard 22.2 No. 4-04

Rated impulse voltage

- 8kV

Local indication

- Two distinct LEDs indicate unit power (green) and open fuse (red). Open fuse LED is resettable upon the replacement of the fuse and the actuation of the reset switch

Flammability rating

- UL 94V0

Wiring

- For power, signal and ground connections use shielded twisted pair 22-24AWG (0.34-0.25mm²) 300V rated wire

Emissions and immunity testing

- Electrostatic Discharge IEC 61000-4-2
- Electrical Fast Transient/Burst IEC 6100-4-4
- Surge Immunity IEC61000-4-5

Packaging

- The CCP-PLC-IND is packaged individually
- A single unit monitors up to three phases. Package includes 0.110" (2.8mm) quick connects for power, signal and ground connections

Minimum circuit voltage

- Minimum circuit voltage required across the CCP is 100Vac/dc for the remote indication device to operate

Installation technique


- Mounts on the left side ONLY of the CCP and mechanically interlocks with the CCP switch handle with hardware provided

IP20 Rating


- Yes

Installed on a CCP-3-xx

Up to 60A CCP



70 to 100A CCP

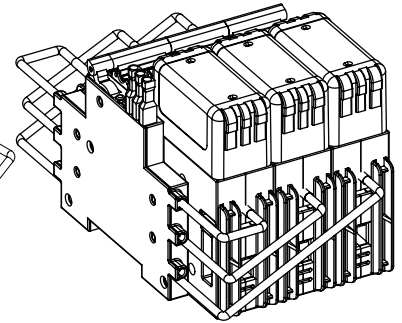

Storage and operating temperature

- -20°C to 75°C

PLC Programming

- The CCP-PLC-IND signal line is designed to provide a digital input to a PLC I/O card. In this case, a Programmable Logic Control program must be written to properly interpret the input signal to the PLC. The PLC program should check for consecutive high signals before taking action on a critical process.


Catalog numbers

- 1-60A, CCP-PLC-IND
- 70-100A, CCP-PLC-100


Description	Max Per CCP	Signal Output to PLC	Min. Circuit Volts	Agency Information	Cat. No.
Wired remote fuse indication for PLC applications up to 60A	1 per CCP	24Vdc/10mA	100Vac	UL 98 Recognized, cURus 22.2 No. 4-04	CCP-PLC-IND
Wired remote fuse indication for PLC applications 70 to 100A	(1, 2- or 3-Pole)			UL 98 Recognized, CSA C22.2 No. 4	CCP-PLC-100

De-energize all circuits before installing or removing any CCP-PLC-IND devices and follow all prescribed safety procedures.


PLC Wiring Schematic

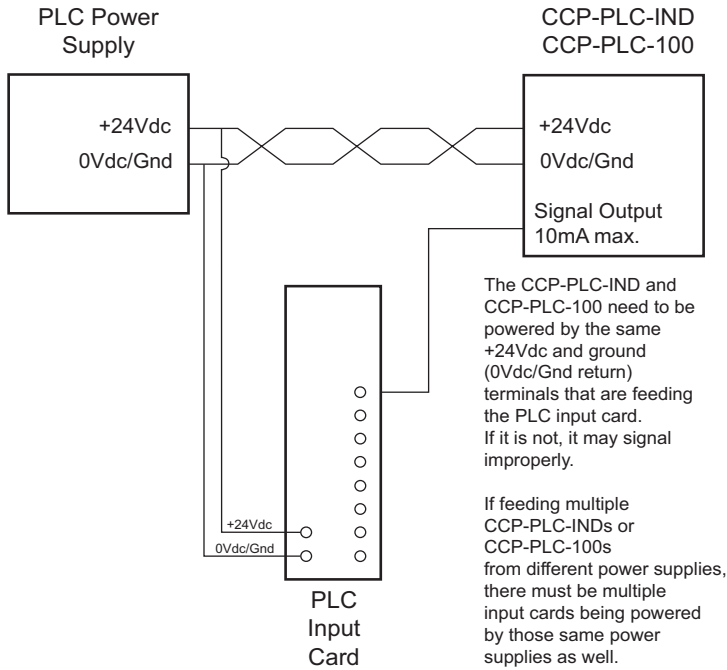

Connections for CCP-PLC-IND from a CCP-3-XX to a remote monitoring device

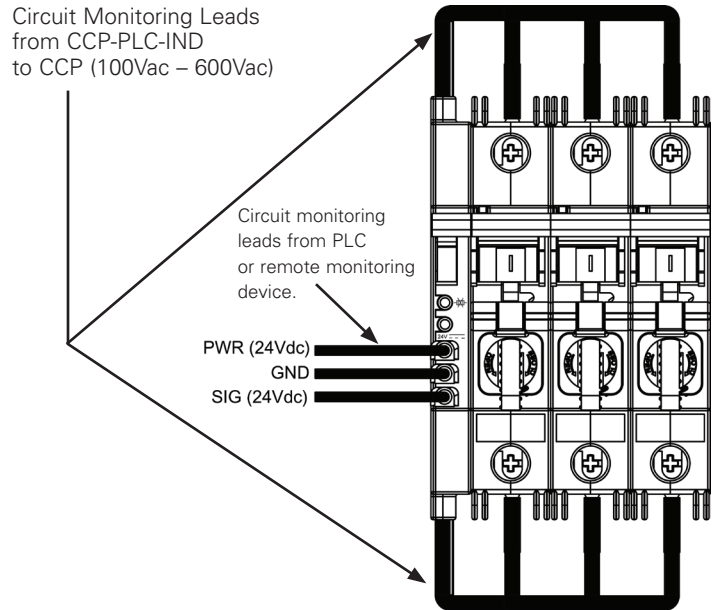

Connection from CCP-PLC-IND to CCP

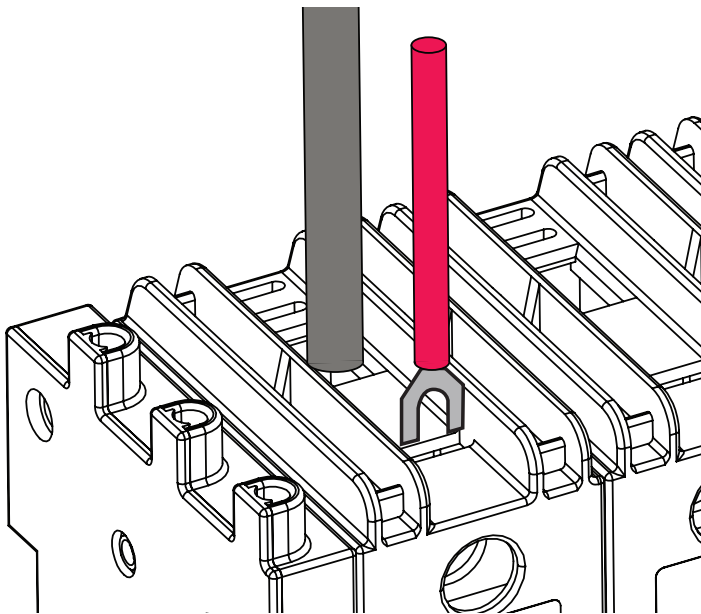

Connect leads from CCP-PLC-IND to the terminals as shown. There is a dedicated terminal on the CCP to accept the spade connectors from the CCP-PLC-IND.



NOTE: When monitoring a 1-pole or 2-pole CCP, trim unused leads.

Compact Circuit Protector (CCP)
 UL Class CC, CF (CUBEFuse), Midget and IEC 10x38mm
 Fused Disconnect Switches



Technical Data 1157
 Effective August 2014

Dimensions – mm (in)

Up to 60A CCP

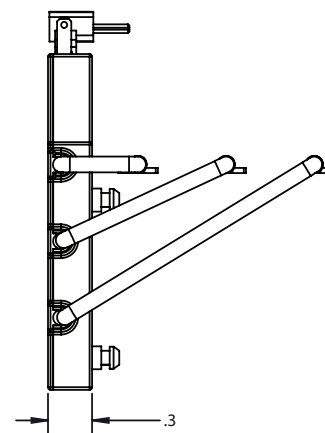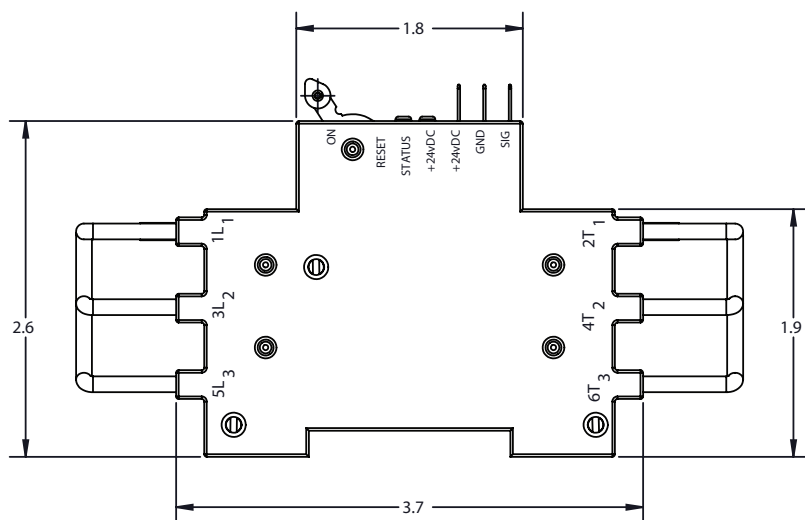

70A to 100A CCP

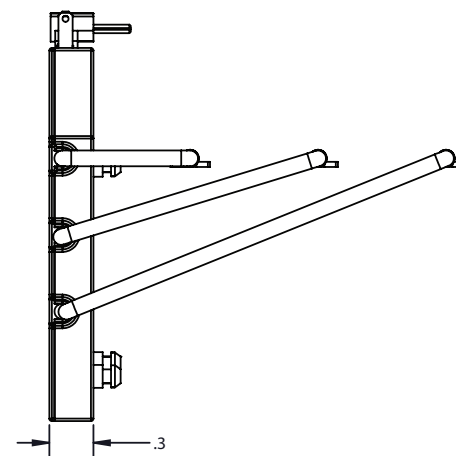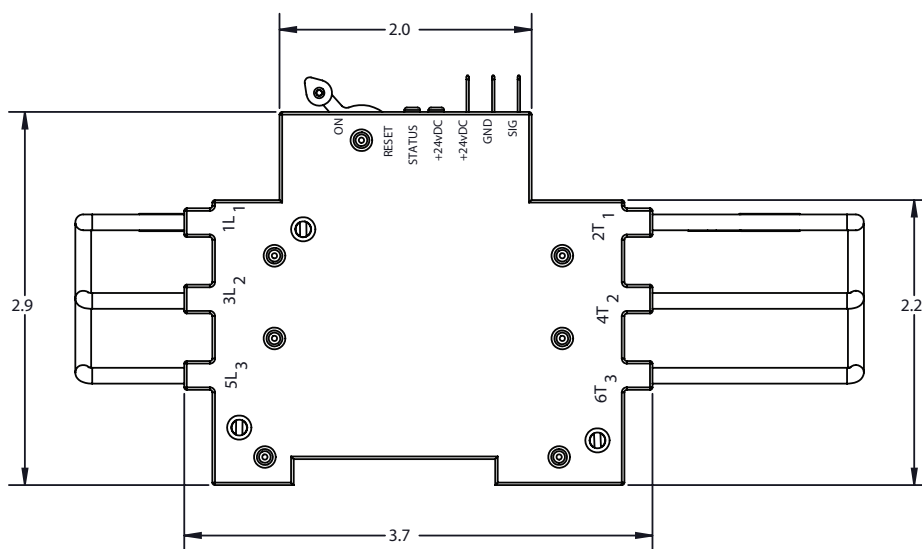

The only controlled copy of this Data Sheet is the electronic read-only version located on the Bussmann Network Drive. All other copies of this document are by definition uncontrolled. This bulletin is intended to clearly present comprehensive product data and provide technical information that will help the end user with design applications. Bussmann reserves the right, without notice, to change design or construction of any products and to discontinue or limit distribution of any products. Bussmann also reserves the right to change or update, without notice, any technical information contained in this bulletin. Once a product has been selected, it should be tested by the user in all possible applications.

Eaton's Bussmann business

114 Old State Road
Ellisville, MO 63021
United States
www.bussmann.com

© 2014 Eaton
All Rights Reserved
Printed in USA
Publication No. 1157 BU-SB14603
August 2014

Eaton is a registered trademark.

All other trademarks are property
of their respective owners.



Powering Business Worldwide