




Agilent 33250A Function/Arbitrary Waveform Generator

Data Sheet

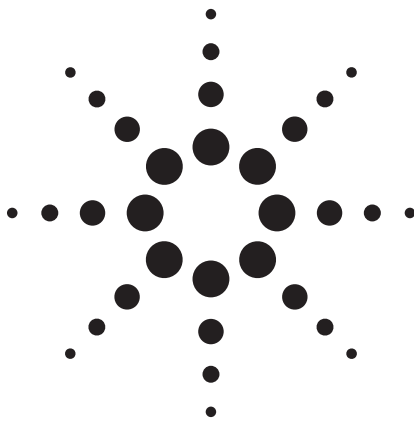

Standard Waveforms

The Agilent Technologies 33250A Function/Arbitrary Waveform Generator uses direct digital-synthesis techniques to create a stable, accurate output on all waveforms, down to 1 μ Hz frequency resolution. The benefits are apparent in every signal you produce, from the sine wave frequency accuracy to the fast rise/fall times of square waves, to the ramp linearity.

Front-panel operation of the 33250A is straightforward and user friendly. The knob or numeric keypad can be used to adjust frequency, amplitude and offset. You can even enter voltage values directly in Vpp, Vrms, dBm, or high/low levels. Timing parameters can be entered in hertz (Hz) or seconds.

Custom Waveform Generation

Why settle for a basic function generator when you can get arbitrary waveforms at no extra cost? With the 33250A, you can generate arbitrary waveforms with 12-bit vertical resolution, 64K memory depth, and a sample rate of 200 MSa/s. You can also store up to four 64K-deep arbitrary wave-

forms in non-volatile memory with user-defined names to help you find the right waveform when you need it most.

The included Agilent IntuiLink software allows you to easily create, edit, and download complex waveforms using the IntuiLink Arbitrary Waveform Editor. Or you can capture a waveform using IntuiLink oscilloscope or DMM and send it to the 33250A for output. For programmers, ActiveX components can be used to control the instrument using SCPI commands. IntuiLink provides the tools to easily create, download, and manage waveforms for your 33250A. To find out more about IntuiLink, visit www.agilent.com/find/intuilink.

Pulse Generation

The 33250A can generate simple pulses up to 50 MHz. With variable edge time, pulse width and voltage level, the 33250A is ideally suited to a wide variety of pulse applications.

- 80 MHz sine and square wave outputs
- Sine, square, ramp, noise and other waveforms
- 50 MHz pulse waveforms with variable rise/fall times
- 12-bit, 200 MSa/s, 64K-point deep arbitrary waveform

Built-in Versatility

AM, FM and FSK capabilities make it easy to modulate waveforms with or without a separate source. Linear or logarithmic sweeps can be performed with a programmable frequency marker signal. Programmable burst count and gating allow you to further customize your signal.

For system applications, both GPIB and RS-232 interfaces are standard, and support full programmability using SCPI commands.

Color Graphical Display

The unique design of the 33250A combines a low-profile instrument with the benefits of a color graphical display. Now you can display multiple waveform parameters at the same time. The graphical interface also allows you to modify arbitrary waveforms quickly and easily.

Timebase Stability and Clock Reference

The 33250A TCXO timebase gives you frequency accuracy of 2 ppm for your most demanding applications. The external clock reference input/output lets you synchronize to an external 10 MHz clock, to another 33250A, or to an Agilent 33120A. Phase adjustments can be made from the front panel or via a computer interface, allowing precise phase calibration and adjustment.



Agilent Technologies

WAVEFORMS

Standard	sine, square, pulse, ramp, noise, sin(x)/x, exponential rise, exponential fall, cardiac, DC volts
Arbitrary	
Waveform length	1 to 64K points
Amplitude resolution	12 bits (including sign)
Repetition rate	1 μ Hz to 25 MHz
Sample rate	200 MSa/s
Filter bandwidth	50 MHz
Non-vol. memory	Four (4) 64K waveforms

FREQUENCY CHARACTERISTICS

Sine	1 μ Hz to 80 MHz
Square	1 μ Hz to 80 MHz
Pulse	500 μ Hz to 50 MHz
Arb	1 μ Hz to 25 MHz
Ramp	1 μ Hz to 1 MHz
White noise	50 MHz bandwidth
Resolution	1 μ Hz; except pulse, 5 digits
Accuracy (1 year)	2 ppm, 18°C to 28°C 3 ppm, 0°C to 55°C

SINEWAVE SPECTRAL PURITY

Harmonic distortion		
	$\leq 3 \text{ Vpp}^1$	$> 3 \text{ Vpp}$
DC to 1 MHz	-60 dBc	-55 dBc
1 to 5 MHz	-57 dBc	-45 dBc
5 to 80 MHz	-37 dBc	-30 dBc
Total harmonic distortion		
DC to 20 kHz	$< 0.2\% + 0.1 \text{ mVrms}$	
Spurious (non-harmonic) ²		
DC to 1 MHz	-60 dBc	
1 to 20 MHz	-50 dBc	
20 80 MHz	-50 dBc + 6 dBc/octave	
Phase noise (30 kHz band)		
10 MHz	$< -65 \text{ dBc (typical)}$	
80 MHz	$< -47 \text{ dBc (typical)}$	

SIGNAL CHARACTERISTICS

Squarewave	
Rise/Fall time	< 8 ns
Overshoot	< 5%
Asymmetry	1% of period + 1 ns
Jitter (rms)	
< 2 MHz	0.01% + 525 ps
≥ 2 MHz	0.1% + 75 ps
Duty cycle	
≤ 25 MHz	20.0% to 80.0%
25 to 50 MHz	40.0% to 60.0%
50 to 80 MHz	50.0% fixed
Pulse	
Period	20.00 ns to 2000.0 s
Pulse width	8.0 ns to 1999.9 s
Variable edge time	5.00 ns to 1.00 ms
Overshoot	< 5%
Jitter (rms)	100 ppm + 50 ps
Ramp	
Linearity	< 0.1% of peak output
Symmetry	0.0% - 100.0%
Arb	
Min. edge time	< 10 ns
Linearity	< 0.1% of peak output
Settling time	< 50 ns to 0.5% of final value
Jitter (rms)	30 ppm + 2.5 ns
OUTPUT CHARACTERISTICS	
Amplitude (into 50Ω)	10 mVpp to 10 Vpp
Accuracy (at 1 kHz, >10 mVpp, Autorange)	± 1% of setting ± 1 mVpp
Flatness (sinewave relative to 1 kHz, Autorange)	
< 10 MHz	± 1% (0.1 dB)
10 to 50 MHz	± 2% (0.2 dB)
50 to 80 MHz	± 5% (0.4 dB)
Units	Vpp, Vrms, dBm, high and low level
Resolution	0.1 mV or 4 digits
Offset (into 50Ω)	± 5 Vpk ac + dc
Accuracy	1% of setting + 2 mV + 0.5% of amplitude
Waveform Output	
Impedance	50Ω typical (fixed) >10 MΩ (output disabled)
Isolation	42 Vpk maximum to earth
Protection	short-circuit protected; overload automatically disables main output

MODULATION

AM	
Carrier waveforms	sine, square, ramp, and arb
Mod. waveforms	sine, square, ramp, noise, and arb
Mod. frequency	2 MHz to 20 kHz
Depth	0.0% to 120.0%
Source	internal/external
FM	
Carrier waveforms	sine, square, ramp, and arb
Mod. waveforms	sine, square, ramp, noise, and arb
Mod. frequency	2 MHz to 20 kHz
Peak deviation	DC to 80 MHz
Source	internal/external
FSK	
Carrier waveforms	sine, square, ramp, and arb
Mod. waveform	50% duty cycle square
Internal rate	2 MHz to 1 MHz
Frequency range	1 μ Hz to 80 MHz
Source	internal/external
External Modulation Input	
Voltage range	± 5 V full scale
Input impedance	10 k Ω
Frequency	DC to 20 kHz
BURST	
Waveforms	sine, square, ramp, pulse, arb, and noise
Frequency	1 μ Hz to 80 MHz ³
Burst count	1 to 1,000,000 cycles or infinite
Start/Stop phase	-360.0° to +360.0°
Internal period	1 ms to 500 s
Gate source	external trigger
Trigger source	single manual trigger, internal, external trig
Trigger delay	
N-cycle, infinite	0.0 ns to 85.000 sec
SWEEP	
Waveforms	sine, square, ramp, and arb
Type	linear and logarithmic
Direction	up or down
Start F/Stop F	100 μ Hz to 80 MHz
Sweep time	1 ms to 500 s
Trigger	single manual trigger, internal, external trig
Marker	falling edge of sync signal (programmable)

SYSTEM CHARACTERISTICS

Configuration Times (typical)

Function change	
Standard	100 ms
Pulse	660 ms
Built-in arb	220 ms
Frequency change	20 ms
Amplitude change	50 ms
Offset change	50 ms
Select user arb	< 900 ms for < 16K pts.
Modulation change	< 200 ms

Arb Download Times GPIB/RS-232 (115Kbps)

Arb Length	Binary	ASCII Integer	ASCII Real
64K points	48 sec	112 sec	186 sec
16K points	12 sec	28 sec	44 sec
8K points	6 sec	14 sec	22 sec
4K points	3 sec	7 sec	11 sec
2K points	1.5 sec	3.5 sec	5.5 sec

TRIGGER CHARACTERISTICS

Trigger input

Input level	TTL compatible
Slope	rising or falling, selectable
Pulse width	> 100 ns
Input impedance	10 k Ω , DC coupled
Latency	
Burst	< 100 ns (typical)
Sweep	< 10 μ s (typical)
Jitter (rms)	
Burst	1 ns; except pulse, 300 ps
Sweep	2.5 μ s

Trigger output

Level	TTL compatible into 50 Ω
Pulse width	> 450 ns
Maximum rate	1 MHz
Fanout	$\leq$ 4 Agilent 33250A's

CLOCK REFERENCE

Phase Offset

Range	-360° to +360°
Resolution	0.001°

External Reference Input

Lock range	10 MHz $\pm$ 35 kHz
Level	100 mVpp to 5 Vpp
Impedance	1 k Ω nominal, ac coupled
Lock time	< 2 s

Internal Reference Output

Frequency	10 MHz
Level	632 mVpp (0 dbm), nominal
Impedance	50 Ω nominal, ac coupled

SYNC OUTPUT

Level	TTL compatible into > 1 k Ω
Impedance	50 Ω nominal

GENERAL

Power supply	100-240 V, 50-60 Hz 100-127 V, 50-400 Hz
Power consumption	140 VA
Operating temp.	0°C to 55°C
Storage temp.	-30°C to 70°C
Stored states	4 named user configurations
Power on state	default or last
Interface	IEEE-488 and RS-232 std.
Language	SCPI-1997, IEEE-488.2
Dimensions (WxHxD)	
Bench top	254 x 104 x 374 mm
Rackmount	213 x 89 x 348 mm
Weight	4.6 kg
Safety designed to	EN61010-1, CSA1010.1, UL-311-1
EMC tested to	IEC-61326-1 IEC-61000-4-3 criteria B IEC-61000-4-6 criteria B
Vibration and shock	MIL-T-28800E, Type III, Class 5
Acoustic noise	40 dBA
Warm-up time	1 hour
Calibration interval	1 year
Warranty	1 year

¹ Harmonic distortion at low amplitudes is limited by a -70 dBm floor

² Spurious noise at low amplitudes is limited by a -75 dBm floor

³ Sine and square waveforms above 25 MHz only with infinite burst count

Ordering Information

Agilent 33250A
80 MHz Function/Arbitrary
Waveform Generator

Accessories included

Operating manual, service manual,
quick reference guide, IntuiLink waveform
editor software, test data, RS-232 cable,
and power cord (see language option).

Options

- Opt. 0B0** Delete manual
- Opt. 1CM** Rackmount kit
(also sold as Agilent 34190A)
- Opt. A6J** ANSI Z540 calibration
- Opt. AB0** Taiwan: Chinese manual
- Opt. AB1** Korea: Korean manual
- Opt. AB2** China: Chinese manual
- Opt. ABA** English: English manual
- Opt. ABD** Germany: German manual
- Opt. ABF** France: French manual
- Opt. ABJ** Japan: Japanese manual

Other Accessories

- 34131A** Carrying case
- 34161A** Accessory pouch
- 34190A** Rackmount kit*

*For racking two 33250As side-by-side, order the
following items: Lock-link kit (p/n 5061-9694),
Flange kit (p/n 5063-9212)



Agilent Email Updates

www.agilent.com/find/emailupdates

Get the latest information on the products and
applications you select.

Agilent T&M Software and Connectivity

Agilent's Test and Measurement software and
connectivity products, solutions and developer
network allows you to take time out of connecting
your instruments to your computer with tools
based on PC standards, so you can focus on your
tasks, not on your connections.

Visit www.agilent.com/find/connectivity
for more information.

Agilent's IO Libraries Suite ships with the
33250A to help you quickly establish an error-
free connection between your PC and instruments
—regardless of the vendor. It provides robust
instrument control and works with the software
development environment you choose.

**For additional description of Agilent's
IO Libraries Suite features and installation
requirements, please go to:**
www.agilent.com/find/iosuite-datasheet

Agilent Technologies' Test and Measurement Support, Services, and Assistance

Agilent Technologies aims to maximize the value
you receive, while minimizing your risk and
problems. We strive to ensure that you get the test
and measurement capabilities you paid for and
obtain the support you need. Our extensive support
resources and services can help you choose the
right Agilent products for your applications and
apply them successfully. Every instrument and
system we sell has a global warranty. Two
concepts underlie Agilent's overall support policy:
"Our Promise" and "Your Advantage."

Our Promise

Our Promise means your Agilent test and
measurement equipment will meet its advertised
performance and functionality. When you are
choosing new equipment, we will help you with
product information, including realistic performance
specifications and practical recommendations
from experienced test engineers. When you
receive your new Agilent equipment, we can help
verify that it works properly, and help with initial
product operation.

Your Advantage

Your Advantage means that Agilent offers a wide
range of additional expert test and measurement
services, which you can purchase according to
your unique technical and business needs. Solve
problems efficiently and gain a competitive edge
by contracting with us for calibration, extra-cost
upgrades, out-of-warranty repairs, and onsite
education and training, as well as design, system
integration, project management, and other
professional engineering services. Experienced
Agilent engineers and technicians worldwide can
help you maximize your productivity, optimize the
return on investment of your Agilent instruments
and systems, and obtain dependable measurement
accuracy for the life of those products.

**Get assistance with all your test and measurement
needs at:**

www.agilent.com/find/assist

Product specifications and descriptions in this document
subject to change without notice.

© Agilent Technologies, Inc. 2001, 2004, 2005
Printed in USA March 14, 2005
5968-8807EN



Agilent Technologies