

Datasheet

## RS Pro RS Series Thick Film Surface Mount Resistor 1206 Case $4.3\Omega \pm 5\%$ $0.25W \pm 200\text{ppm}/^\circ\text{C}$

RS Stock No: 713-1192



### Product Details

RS Pro 1206 thick film surface mount resistor with  $\pm 5\%$  tolerance, provides  $4.3\Omega$  resistance and is power rated at  $0.25\text{ W}$ . The temperature coefficient of resistance is  $\pm 200\text{ ppm}/^\circ\text{C}$ . Applications include telecommunication equipment, radio and tape recorders, TV tuners, video cameras, watches, pocket calculators, automotive industry, computers, instruments, medical and military equipment.

### Features and Benefits

- Small size and lightweight
- Highly reliable multilayer electrode construction
- Compatible with all soldering process


**Specifications:**

|                                 |                      |
|---------------------------------|----------------------|
| Case Style                      | Ruthenium Oxide      |
| Depth                           | 1.55 mm              |
| Dimensions                      | 3.1 x 1.55 x 0.55 mm |
| Height                          | 0.55 mm              |
| Length                          | 3.1 mm               |
| Maximum Operating Temperature   | +155°C               |
| Maximum Temperature Coefficient | +200 ppm/°C          |
| Minimum Operating Temperature   | -55°C                |
| Minimum Temperature Coefficient | -200 ppm/°C          |
| Package/Case                    | 1206                 |
| Power Rating                    | 0.25 W               |
| Resistance                      | 4.3 Ω                |
| Technology                      | Thick Film           |
| Temperature Coefficient         | ±200 ppm/°C          |
| Termination Style               | Solder Pad           |
| Tolerance                       | ±5%                  |
| Maximum Operating Voltage       | 200 V                |
| Maximum Overload Voltage        | 400 V                |
| Tape Width                      | 8 mm                 |

# Thick Film Chip Resistor 5% - RS Series

## 0201/0402/0603/0805/1206

### Construction

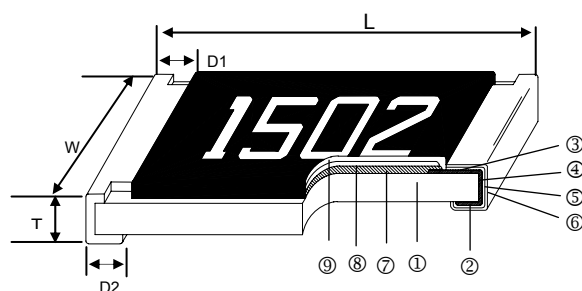


|                         |                           |   |
|-------------------------|---------------------------|---|
| ① Alumina Substrate     | ④ Edge Electrode (NiCr)   | ⑦ Resistor Layer (RuO <sub>2</sub> /Ag) |
| ② Bottom Electrode (Ag) | ⑤ Barrier Layer (Ni)      | ⑧ Primary Overcoat (Glass)              |
| ③ Top Electrode (Ag-Pd) | ⑥ External Electrode (Sn) | ⑨ Secondary Overcoat (Epoxy)            |

### Dimensions

Unit: mm

| Type    | Size (Inch) | L         | W         | T         | D1        | D2        | Weight (g) (1000pcs) |
|---------|-------------|-----------|-----------|-----------|-----------|-----------|----------------------|
| RS-0201 | 0201        | 0.60±0.03 | 0.30±0.03 | 0.23±0.03 | 0.15±0.05 | 0.15±0.05 | 0.150                |
| RS-0402 | 0402        | 1.00±0.05 | 0.50±0.05 | 0.35±0.05 | 0.20±0.10 | 0.20±0.10 | 0.620                |
| RS-0603 | 0603        | 1.60±0.10 | 0.80±0.10 | 0.45±0.10 | 0.30±0.20 | 0.30±0.20 | 2.042                |
| RS-0805 | 0805        | 2.00±0.10 | 1.25±0.10 | 0.50±0.10 | 0.35±0.20 | 0.40±0.20 | 4.368                |
| RS-1206 | 1206        | 3.10±0.10 | 1.55±0.10 | 0.55±0.10 | 0.50±0.25 | 0.50±0.20 | 8.947                |

### Part Numbering

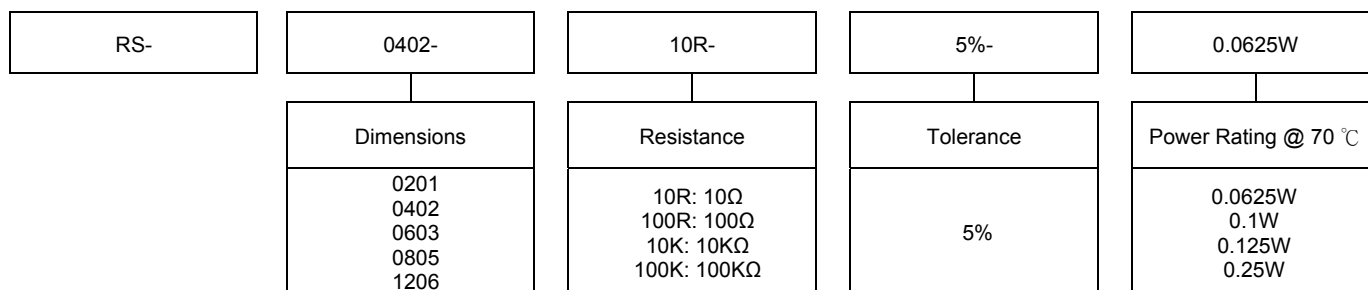

Derating Curve



Standard Electrical Specifications

| Item<br>Type | Power Rating at 70°C<br>Jumper<br>Rated Current | Operating Temp. Range | Max. Operating Voltage | Max. Overload Voltage | Resistance Range | TCR (PPM/°C) |
|--------------|---|-----------------------|------------------------|-----------------------|------------------|--------------|
|              |   |                       |                        |                       | ±5%              |              |
| RS-0201      | 1/20W   | -55 ~ +155°C          | 25V                    | 50V                   | 1Ω – 9.76MΩ      | ±200         |
| Jumper       | 1A  |                       |                        |                       | 0Ω (<50mΩ)       | -            |
| RS-0402      | 1/16W   | -55 ~ +155°C          | 50V                    | 100V                  | 1Ω – 9.76MΩ      | ±200         |
| Jumper       | 1A  |                       |                        |                       | 0Ω (<50mΩ)       | -            |
| RS-0603      | 1/10W   | -55 ~ +155°C          | 75V                    | 150V                  | 1Ω – 9.76MΩ      | ±200         |
| Jumper       | 1A  |                       |                        |                       | 0Ω (<50mΩ)       | -            |
| RS-0805      | 1/8W  | -55 ~ +155°C          | 150V                   | 300V                  | 1Ω – 9.76MΩ      | ±200         |
| Jumper       | 2A  |                       |                        |                       | 0Ω (<50mΩ)       | -            |
| RS-1206      | 1/4W  | -55 ~ +155°C          | 200V                   | 400V                  | 1Ω – 9.76MΩ      | ±200         |
| Jumper       | 2A  |                       |                        |                       | 0Ω (<50mΩ)       | -            |

Soldering Condition



IR Reflow Soldering

Wave Soldering (Flow Soldering)

- (1) Time of IR reflow soldering at maximum temperature point 260°C: 10s
- (2) Time of wave soldering at maximum temperature point 260°C: 10s
- (3) Time of soldering iron at maximum temperature point 410°C: 5s



**■ Environmental Characteristics**

| Item   | Requirement  |        | Test Method   |
|--|--|--------|---|
|  | ±5%  | Jumper |   |
| Temperature Coefficient of Resistance (T.C.R.) | As Spec.   |        | JIS-C-5201-1 4.8<br>IEC-60115-1 4.8<br>-55°C~+125/+155°C, 25°C is the reference temperature                               |
| Short Time Overload                            | ±(2.0%+0.05Ω)  | <50mΩ  | JIS-C-5201-1 4.13<br>IEC-60115-1 4.13<br>RCWV*2.5 or Max. overload voltage for 5 seconds, 2 seconds for high power series |
| Insulation Resistance                          | ≥10G   |        | JIS-C-5201-1 4.6<br>IEC-60115-1 4.6<br>Max. overload voltage for 1 minute   |
| Endurance                                      | ±(3.0%+0.10Ω)  | <100mΩ | JIS-C-5201-1 4.25<br>IEC-60115-1 4.25.1<br>70±2°C, Max. working voltage for 1000 hrs with 1.5 hrs "ON" and 0.5 hrs "OFF"  |
| Damp Heat with Load                            | ±(3.0%+0.10Ω)  | <100mΩ | JIS-C-5201-1 4.24<br>40±2°C, 90~95% R.H. Max. working voltage for 1000 hrs with 1.5 hrs "ON" and 0.5 hrs "OFF"            |
| Dry Heat                                       | ±(1.5%+0.10Ω)  | <50mΩ  | JIS-C-5201-1 4.23<br>IEC-60115-1 2.23.2<br>at +125/+155°C for 1000 hrs  |
| Bending Strength                               | ±(1.0%+0.05Ω)  | <50mΩ  | JIS-C-5201-1 4.33<br>IEC-60115-1 4.33<br>Bending once for 5 seconds<br>2010, 2512 sizes: 2mm Other sizes: 3mm             |
| Solderability                                  | 95% min. coverage  |        | JIS-C-5201-1 4.17<br>IEC-60115-1 4.17<br>245±5°C for 3 seconds  |
| Resistance to Soldering Heat                   | ±(1.0%+0.05Ω)  | <50mΩ  | JIS-C-5201-1 4.18<br>IEC-60115-1 4.18<br>260±5°C for 10 seconds   |
| Voltage Proof                                  | No breakdown or flashover                                  |        | JIS-C-5201-1 4.7<br>IEC-60115-1 4.7<br>1.42 times RCWV (RMS) for 1 minute   |
| Leaching                                       | Individual leaching area □ 5%<br>Total leaching area □ 10% |        | JIS-C-5201-1 4.18<br>IEC-60068-2-58 8.2.1<br>260±5°C for 30 seconds   |
| Rapid Change of Temperature                    | ±(1.0%+0.05Ω)  | <50mΩ  | JIS-C-5201-1 4.18<br>IEC-60115-1 4.18<br>-55°C to +125/+155°C, 5 cycles   |

**■ Storage Temperature: 25±3°C; Humidity < 80%RH**





■ **Marking**

No Marking for 0201 and 0402

Jumper for all: Letter "0"


5% for 0603/0805/1206: 3 digits marking in E24

Example: 101=100Ω 102=1KΩ (1<sup>st</sup> and 2<sup>nd</sup> are E24 code and 3<sup>rd</sup> code is multiplier)

|          |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|----------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| E24 code | 10 | 11 | 12 | 13 | 15 | 16 | 18 | 20 | 22 | 24 | 27 | 30 | 33 | 36 | 39 | 43 | 47 | 51 | 56 | 62 | 68 | 75 | 82 | 91 |
|----------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|

■ **Recommend Land Pattern**

Unit: mm

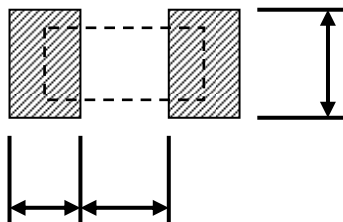

| Type    | A    | B    | C    |
|---------|------|------|------|
| RS-0201 | 0.30 | 0.25 | 0.30 |
| RS-0402 | 0.50 | 0.45 | 0.60 |
| RS-0603 | 0.90 | 0.60 | 0.90 |
| RS-0805 | 1.20 | 0.70 | 1.30 |
| RS-1206 | 2.00 | 0.90 | 1.60 |