


Technical Data

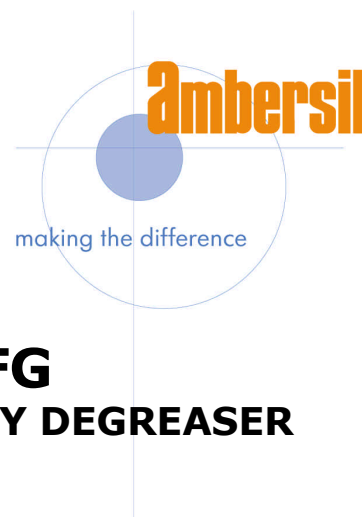

INDUSTRIAL DEGREASER FG **FOOD PROCESSING SAFE® HEAVY DUTY DEGREASER**

INDUSTRIAL DEGREASER FG is an innovative solvent blend that is excellent for use where rapid turnaround is necessary and low flash point solvents can be used. Dissolves and removes greases, oils, lubricants, adhesives and contaminants from equipment, machinery, motors and metal parts.

- NSF A8 and K1 registered (N° 140255 and 140250) for use in food industry
- Cuts through dirt and grease
- Fast evaporation to minimise downtime, leaves no residues
- Easy "in place" cleaning with minimal odour
- Non-corrosive and non-staining
- Safe on most plastics, coatings and rubbers (always test prior to use)
- Aerosol fitted with a 360° Spray System for all angle use, even upside down



APPLICATIONS

- Electric motors
- Mechanical brakes and clutches
- Air tools
- Pumps
- Material handling equipment
- Dies
- Generators
- Air conditioners and compressors
- Wire ropes
- Bearings
- General degreasing and oil removal
- Fork lift trucks
- Sprockets
- Moulds
- Chains

DIRECTIONS

- Can be used by spraying, immersion, dipping or wiping. For tough soiling, apply product and agitate to loosen contaminants
- Apply liberally and allow excess to run off
- Air dry or dry with absorbent cloth. Repeat if necessary
- Test a small area prior to use to check materials compatibility. Do not use on sensitive electronic equipment
- Ensure adequate ventilation. Do not use on energised equipment
- Rinse with potable water. Allow to dry thoroughly and vapours disperse before reactivating system

TECHNICAL DATA

NSF Registered, Category	: Aerosol A8 + K1 (N° 140255)
	: Bulk A8 + K1 (N° 140250)
Appearance	: Colourless Liquid, Sweet Odour
Specific Gravity (@ 20°C)	: 0.808
Flash Point (closed cup)	: 25°C
Boiling Range	: 100-170 °C
Freezing Point	: < -30 °C
Evaporation Rate (ether = 1)	: 19
Vapour Density (vs air = 1)	: 4
Kauri-Butanol Value	: > 150
Hildebrand Solubility Parameter (calc.)	: 8.206
Hydrogen Bonding Index (calc.)	: 0.384
Fractional Polarity (calc.)	: 0.037
Viscosity (@ 20°C, calc.)	: 0.76 mPa.s
Surface Tension (@ 25°C est.)	: 23 mN/m
Plastics Compatibility	: Safe On Most Plastics (Test Prior To Use)
Packaging	: 500ml Aerosol, 5Ltr Bulk

STORAGE

The product may be stored at normal ambient temperatures and has a shelf life of not less than 72 months with correct storage. Aerosols should always be stored below 50°C, away from direct heat and naked flame.

HEALTH AND SAFETY

Health and Safety sheet available separately.

MISREPRESENTATION ACT 1967

TRADE DESCRIPTIONS ACT 1968

The information given in this publication is based on our experience and reports from customers. There are many factors outside our control and knowledge which affect the use and performance of our products and for which reason no warranty is given, express or implied. Users should make their own tests to determine the applicability of such information or the suitability of any products for their own particular purposes. Statements concerning the use of the products described herein are not to be construed as recommending the infringement of any patent and no liability for infringement arising out of any such use is to be assumed.

CRC Industries UK Limited, Wylds Road, Bridgwater, Somerset, TA6 4DD

Tel: +44 (0) 1278 727200

Fax: +44 (0) 1278 425644

Web: www.ambersil.com

E-mail: sales.uk@crcind.com