

Fuseholder Open Design, Holder for MSF 125, horizontal, THT



125 VAC · 5 A (UL/CSA)



Description

- Through hole mounting
- Horizontal mount

Standards

- UL 4248-1
- CSA 22.2 no. 4248-1

Approvals

- UL File Number: E39328

References

Fuseholder to MSF 125; MSU 125

Weblinks

[pdf-datasheet](#), [html-datasheet](#), [General Product Information](#), [Approvals](#), [CE declaration of conformity](#), [RoHS](#), [CHINA-RoHS](#), [REACH](#), [e-Shop](#), [SCHURTER-Stock-Check](#), [Distributor-Stock-Check](#), [Detailed request for product](#)


Technical Data

Fuse-Link	Microfuse 125 V
Mounting	PCB
Terminal	Solder THT
Rated Voltage	125 VAC
Rated current	5 A (UL/CSA)
Admissible Ambient Air Temp.	-40 °C to 85 °C
Climatic Category	40/085/21 acc. to IEC 60068-1
Material: Socket	Thermoplastic, black, UL 94V-0
Material: Terminals	Silver-Plated Copper Alloy
Unit Weight	0.34 g
Storage Conditions	0 °C to 60 °C, max. 70% r.h.
Product Marking	

Soldering Methods	Wave
Solderability	245 °C / 3 sec acc. to IEC 60068-2-20, Test Ta, method 1
Resistance to Soldering Heat	260 °C / 5 sec acc. to IEC 60068-2-20, Test Tb, method 1A
Contact Resistance	< 10 mΩ at 20 mV
Dielectric Strength	> 2.5 kV between Life parts (50 Hz; 1 min)
Impulse Withstand Voltage	> 4 kV between Life parts
Insulation Resistance	> 10 MΩ between Life parts (500 VDC; 1 min)

Dimension

11.3 mm

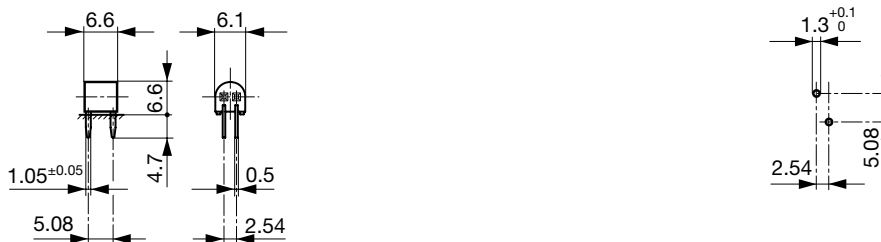

Drilling diagram

All Variants

Holder	Order Number
--------	--------------

●	0031.7505
---	-----------

Most Popular.

Availability for all products can be searched real-time: <http://www.schurter.com/en/Stock-Check/Stock-Check-SCHURTER>

Packaging Unit Plastic Bag (100 pcs.)
