

LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
AJ	16		A	REVISED PER EC OS14-0150-05	30AUG05	BM	JL
			A1	REVISED PER ECO-10-000444	31OCT09	KK	AEG

- 1

ZINC PER QQ-Z-363.
- 2

POLYMETHYLPENTENE, GENERAL PURPOSE.
- 3

PHOSPHOR BRONZE PER QQ-B-750.
- 4

BRASS PER ASTM-B-453.
- 5




NICKEL PLATE PER QQ-N-290,
3.81µm [.000150] MINIMUM THICK.
- 6

TIN PLATE PER ASTM-B-545,
3.81µm [.000150] MINIMUM THICK.
- 7


GOLD PLATE PER ASTM-B-488,
0.76µm [.000030] MINIMUM THICK.
- 8

SEE INSTRUCTION SHEET 408-2769.
- 9

OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

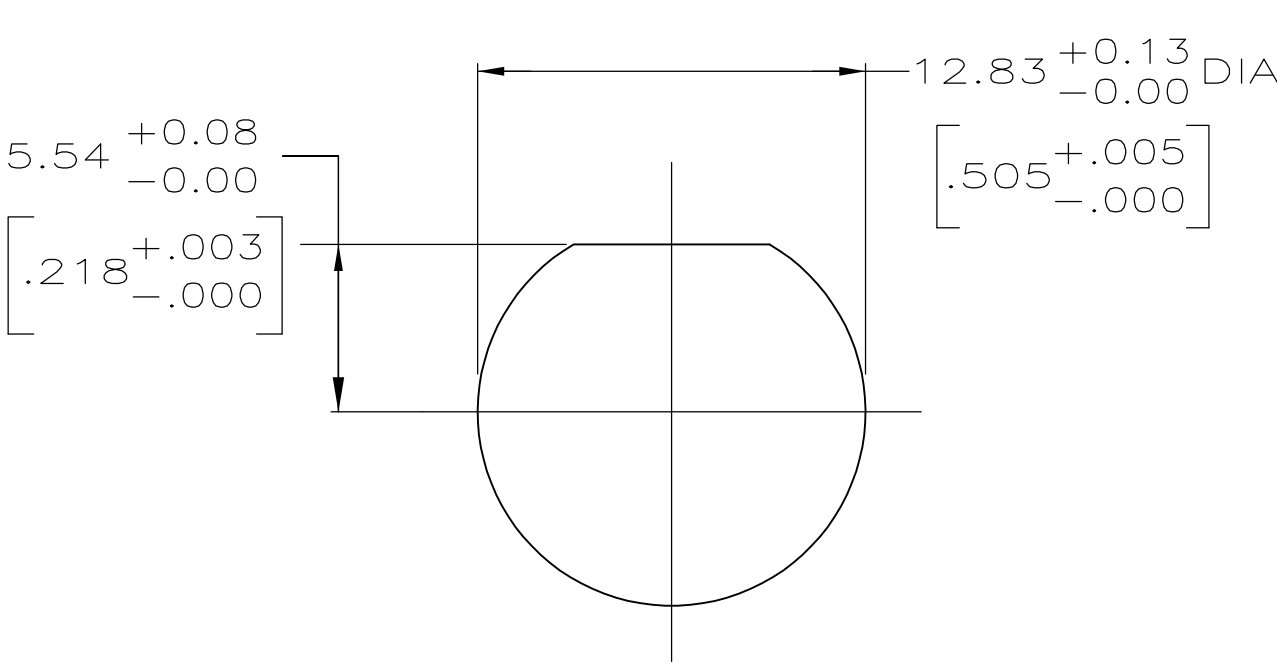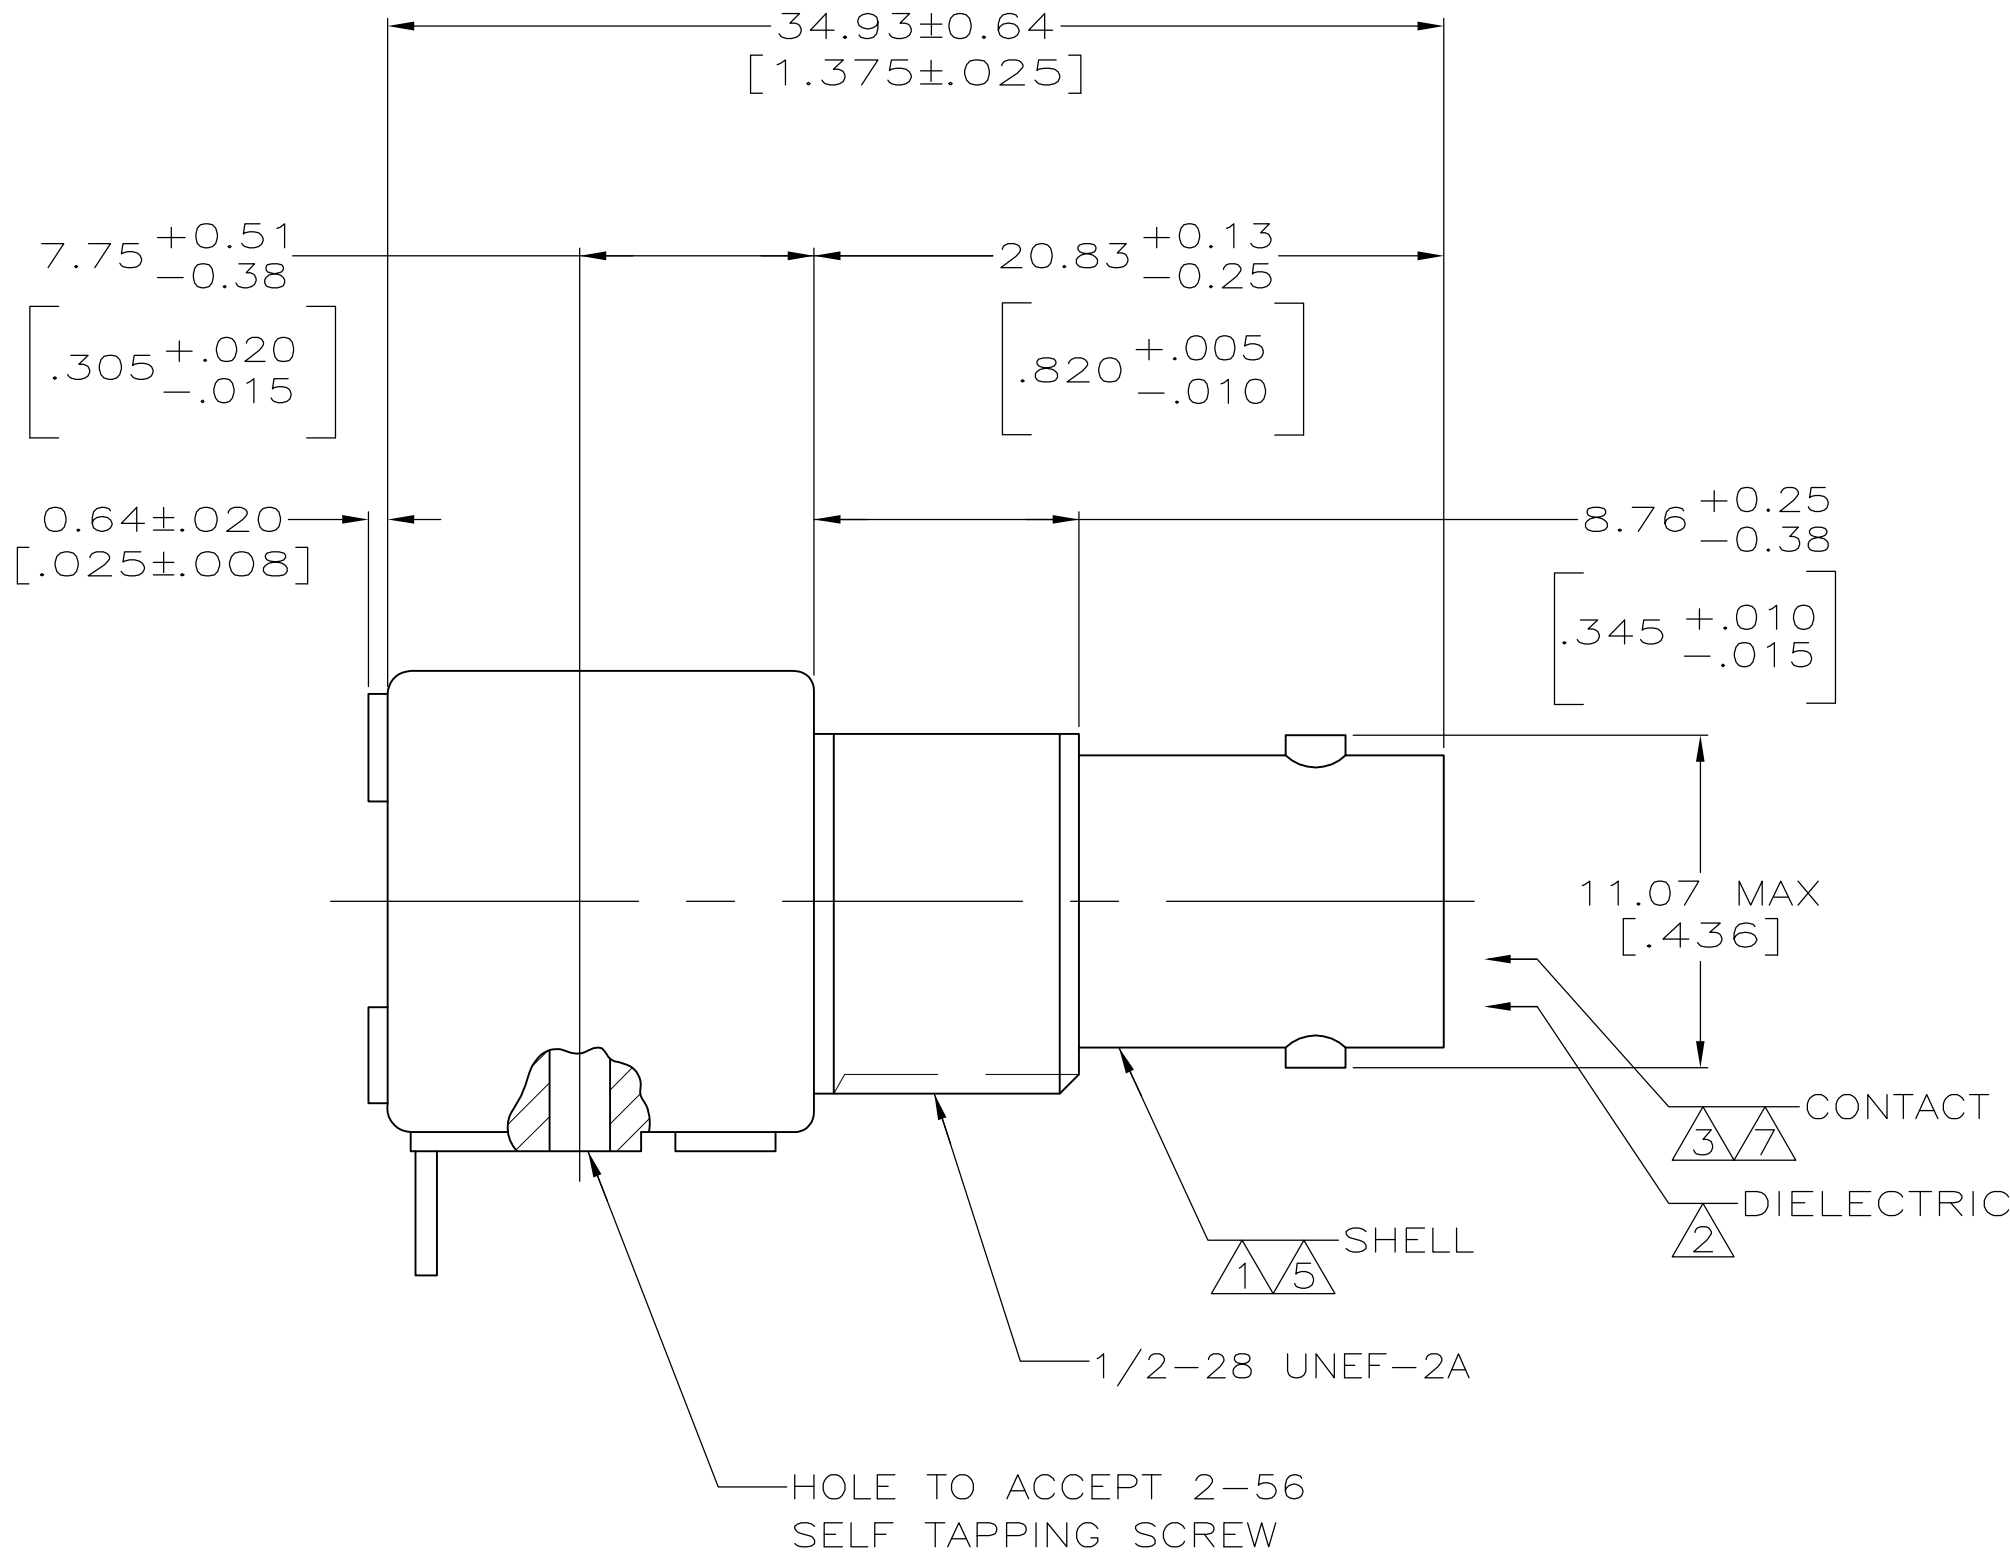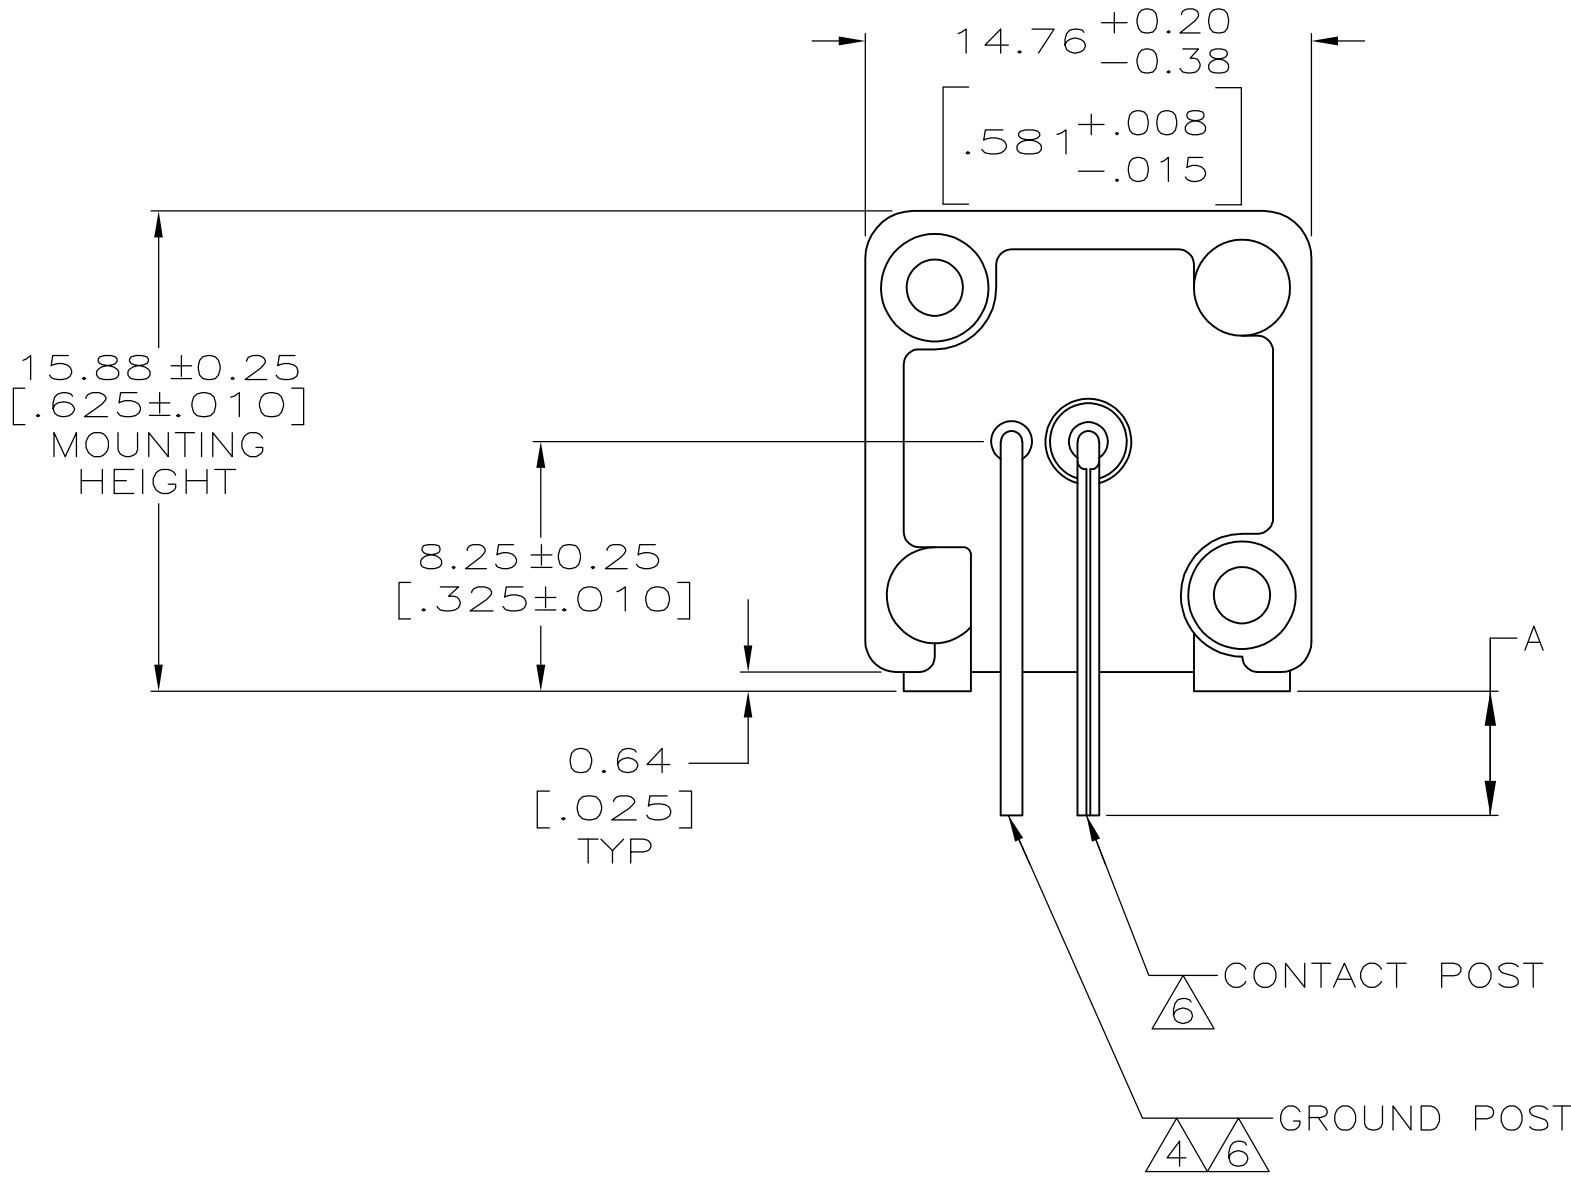

RECOMMENDED PANEL CUTOUT

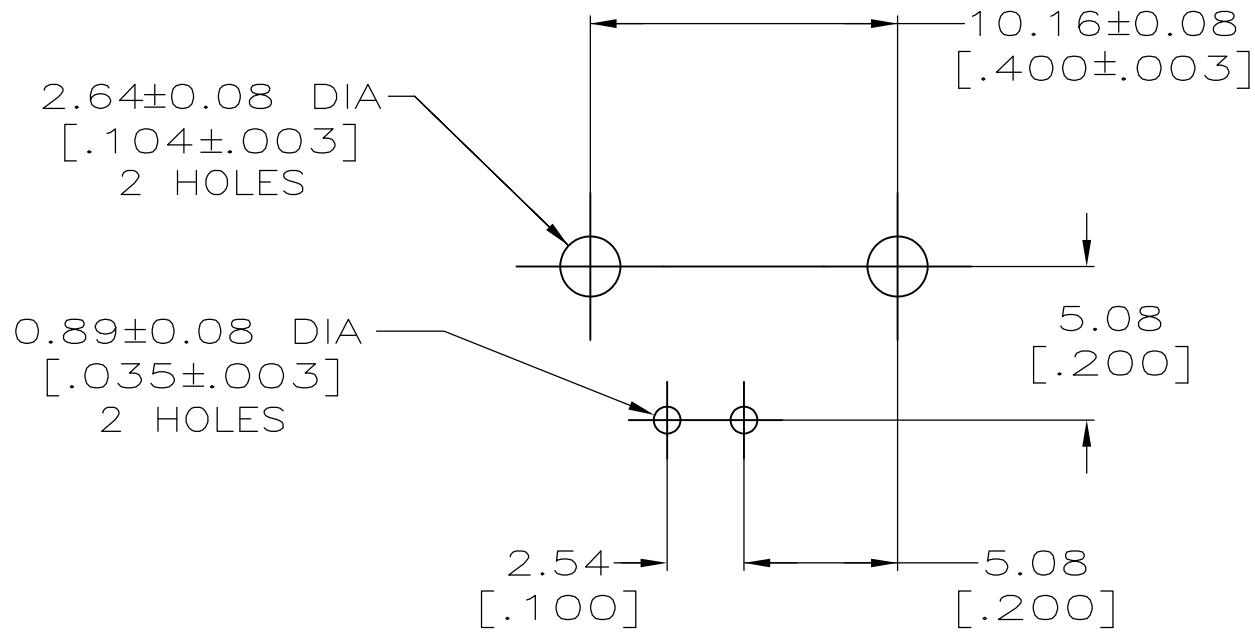

PCB CONFIGURATION

9 OBSOLETE	2.79 ±0.25 [.110 ±.010]	5227676-2
	4.11 ±0.43 [.162 ±.017]	5227676-1
A		PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN L. VARELA - DOCK 20APR2005	Tyco Electronics Corporation Harriaburg, Pa 17105-3608	
DIMENSIONS: mm [INCHES]		CHK J. HAVENER 20APR2005	NAME	
		APVD J. LIPPERT 20APR2005	PRODUCT SPEC	
			108-12078	
			APPLICATION SPEC	
MATERIAL		FINISH	WEIGHT	RESTRICTED TO
1 2 3 4		5 6 7	A1 00779 C=5227676	—
CUSTOMER DRAWING			SCALE 4:1	SHEET 1 OF 1 REV A1