



## Selection Guide

Part No.	Dice	Lens Type	Iv (mcd) [2] @ V=5V		Viewing Angle [1]
			Min.	Typ.	2θ1/2
L-934SRD-5V	SUPER BRIGHT RED (GaAlAs)	RED DIFFUSED	70	150	60°

Notes:

1. θ1/2 is the angle from optical centerline where the luminous intensity is 1/2 the optical centerline value.
2. Luminous Intensity/ Luminous Flux: +/-15%.

## Electrical / Optical Characteristics at TA=25°C

Symbol	Parameter	Device	Typ.	Max.	Units	Test Conditions
$\lambda_{peak}$	Peak Wavelength	Super Bright Red	660		nm	V <sub>F</sub> =5V
$\lambda_D$ [1]	Dominant Wavelength	Super Bright Red	640		nm	V <sub>F</sub> =5V
$\Delta\lambda_{1/2}$	Spectral Line Half-width	Super Bright Red	20		nm	V <sub>F</sub> =5V
I <sub>F</sub>	Forward Current	Super Bright Red	13	17.5	mA	V <sub>F</sub> =5V
I <sub>R</sub>	Reverse Current	Super Bright Red		10	uA	V <sub>R</sub> = 5V

Note:


1. Wavelength: +/-1nm.

## Absolute Maximum Ratings at TA=25°C

Parameter	Super Bright Red	Units
Power dissipation	85	mW
Forward Voltage	6	V
Reverse Voltage	5	V
Operating Temperature	-40°C To +70°C	
Storage Temperature	-40°C To +85°C	
Lead Solder Temperature [1]	260°C For 3 Seconds	
Lead Solder Temperature [2]	260°C For 5 Seconds	

Notes:

1. 2mm below package base.
2. 5mm below package base.

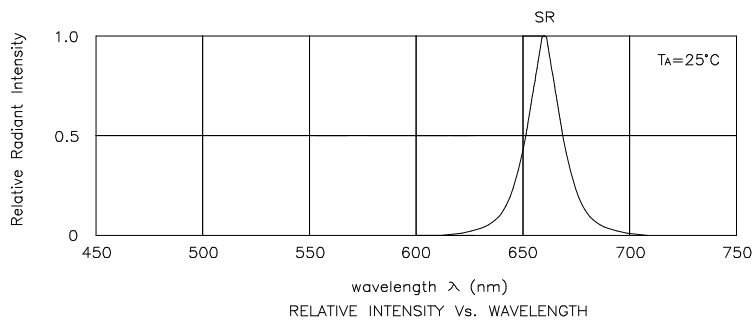

## Super Bright Red

## L-934SRD-5V

