
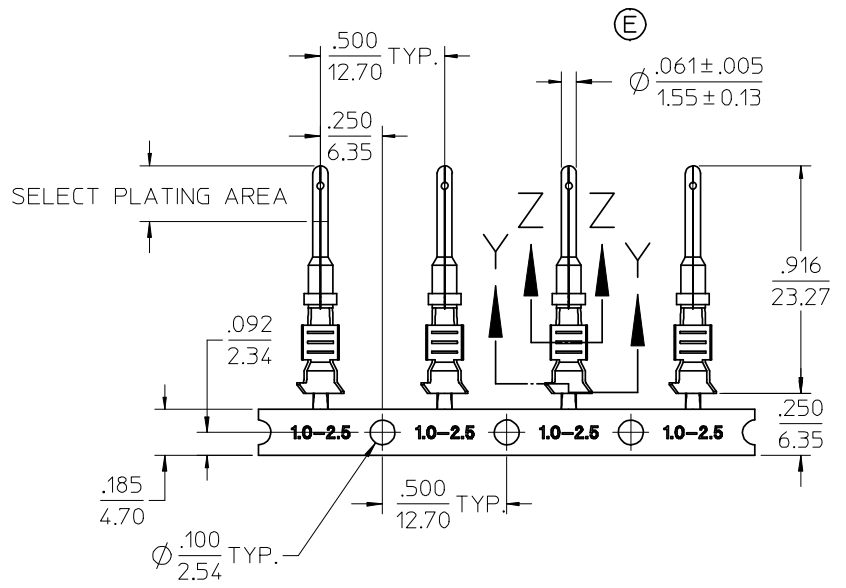
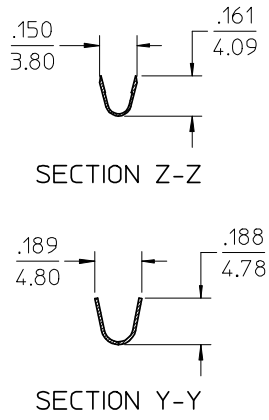
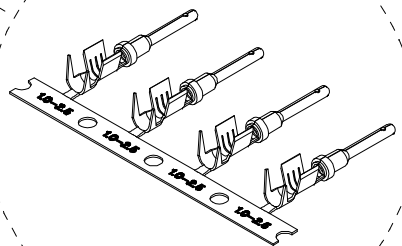


(E)	STRIP MATERIAL NUMBER	FINISH
	84590-0032	OVERALL NICKEL 80µ" MINIMUM

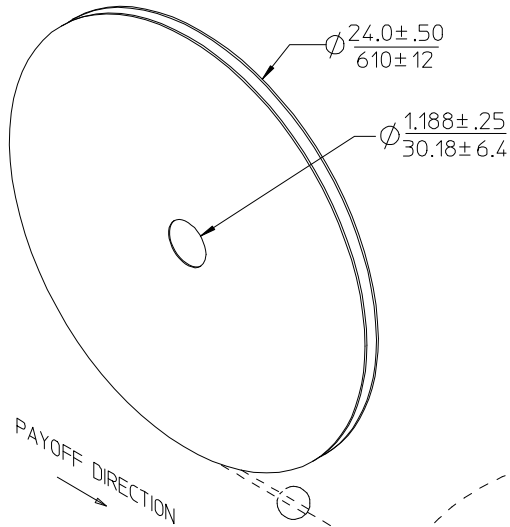

(E) WIRE INSULATION O.D. RANGE $\frac{.075-.150}{1.91-3.81}$

NOTES:

1. MATERIAL: COPPER ALLOY .0120/0.305 THICK.
2. FINISH: SEE CHART.
3. STRIP TERMINALS ARE REELED AS SHOWN ABOVE, 3000 PARTS PER REEL.
4. TERMINAL FOR USE WITH SERIES XRC CONNECTOR ASSEMBLIES.
5. ALL DIMENSIONS ARE REFERENCE.
6. ALL MATERIALS AND FINISHES ARE ROHS COMPLIANT.

UPDATE NOTES & TABLE EC NO: WNA2008-0139 DR: WMLUNG 2008/07/07 CHK: RDEROSS 2008/04/21 APPR: RDEROSS 2008/04/24	DESCRIPTION REV	QUALITY SYMBOLS	GENERAL TOLERANCES (UNLESS SPECIFIED)	DIMENSION STYLE	SCALE	DESIGN UNITS	THIRD ANGLE PROJECTION
		$\nabla=0$ $\nabla=0$	mm INCH 4 PLACES ± --- ± --- 3 PLACES ± --- ± .010 2 PLACES ± 0.25 ± .02 1 PLACE ± 0.5 ± --- ANGULAR ± 3°	IN/MM DRAWN BY DATE RSTONE 10/14/04 CHECKED BY DATE GROBERTSON 10/15/04 APPROVED BY DATE LROTHAUS 10/16/04	2:1 INCH	(E) CONTACT PIN, 14-18 AWG (1.0-2.5MM SQ.) MOLEX INCORPORATED	
		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	MATERIAL NO. SEE CHART	DOCUMENT NO. SD-84590-007	SHEET NO. 1 OF 1		
		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION					