

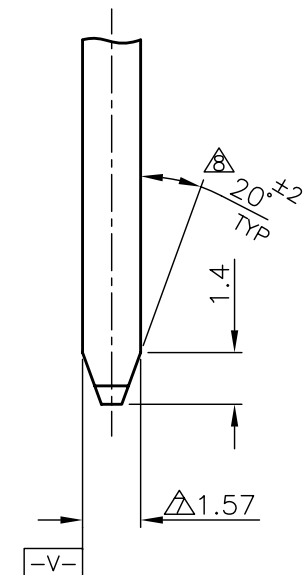
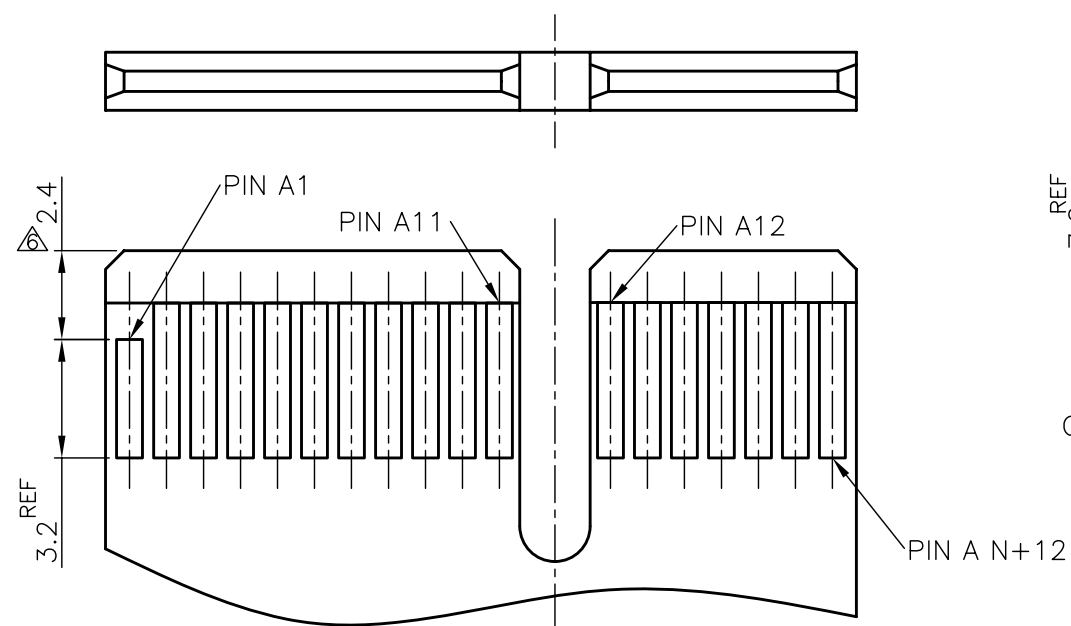


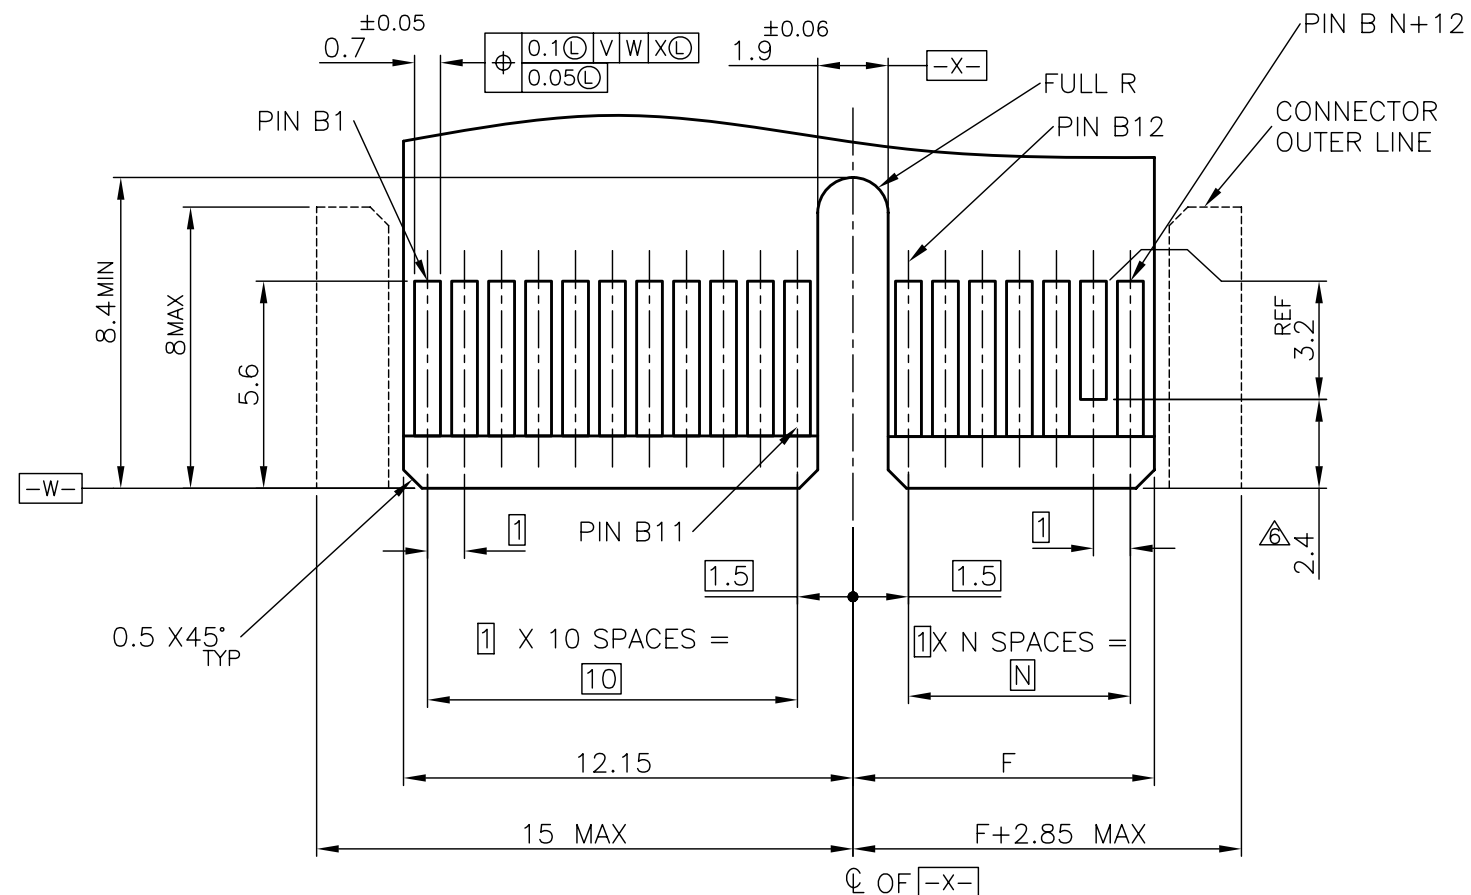

- 6 THIS DIMENSION IS ONLY APPLIED TO PRSNT PINS.
 7 CARD THICKNESS APPLIES ACROSS TABS AND INCLUDES
 PLATING AND/OR METALIZATION.
 8 CHAMFER EDGES MUST BE FREE OF CUTTING BURRS.
 9 NO TIE BAR PERMITTED FROM CARD EDGE TO LEADING EDGE
 OF PAD FOR PRSNT PIN.
 10 APPLICATION NOTE;
 GOLD CONTACT PAD : ELECTROLESS GOLD PLATING 0.05 μ m MIN.
 OVER ELECTROLESS Ni PLATING 2 μ m MIN.

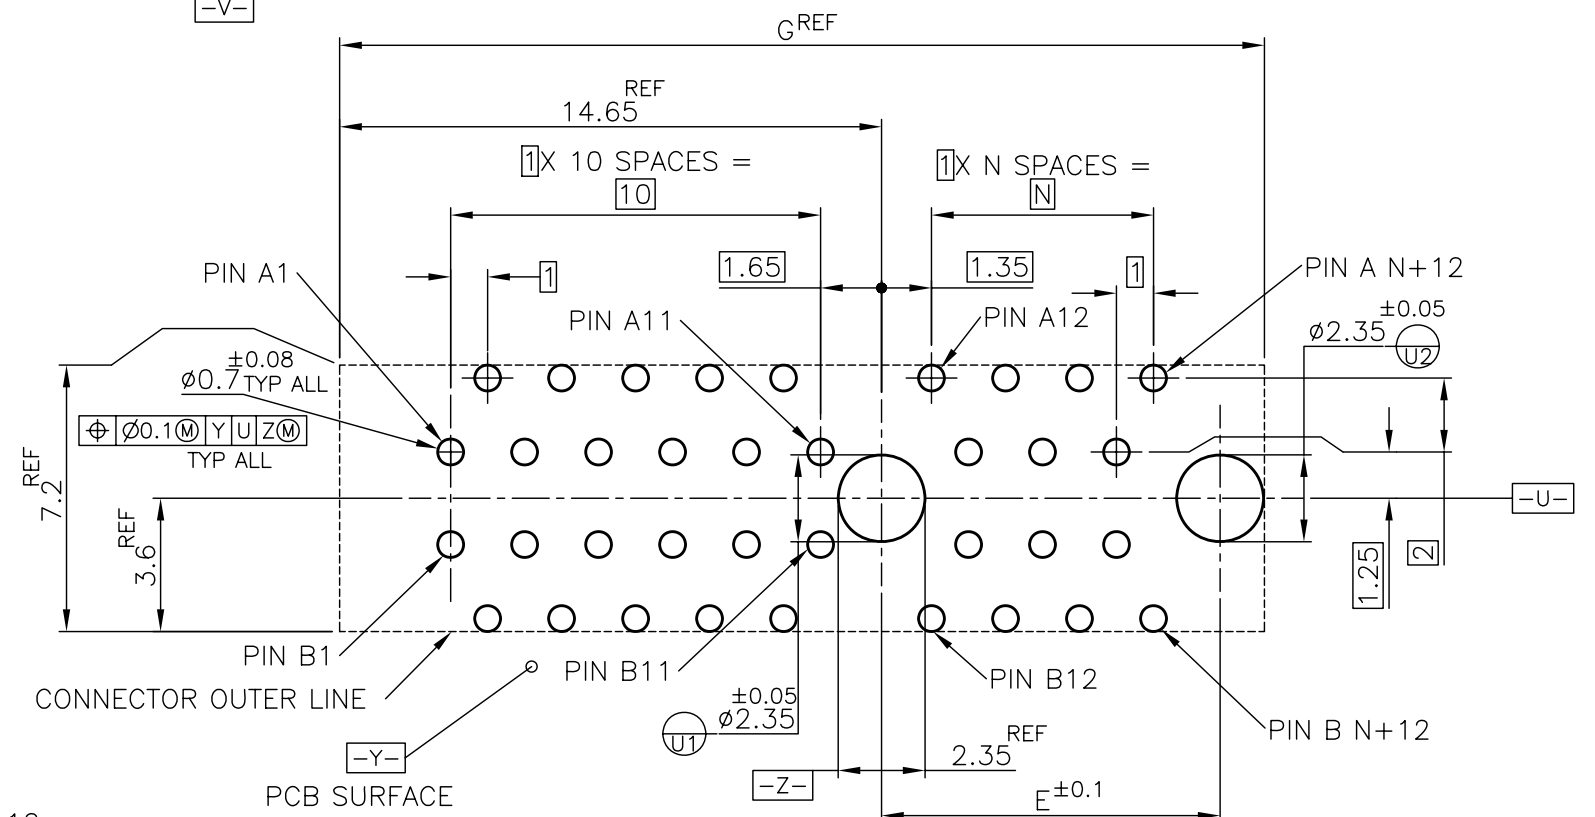


PCB PATTERN LAYOUT

MODULE LAYOUT(MATING PART ONLY)

A1,B17,B31,B48,B81	89	72.15	73.15	70	164	16
A1,B17,B31,B48	56	39.15	40.15	37	98	8
A1,B17,B31	39	22.15	23.15	20	64	4
A1,B17	25	8.15	9.15	6	36	1
PRSENT PIN	G	F	E	N	POS.	PORT

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
MM



TOLERANCES UNLESS
OTHERWISE SPECIFIED:

0 PLC	± —	±0.13
1 PLC	± —	±1
2 PLC	± —	
3 PLC	± —	
4 PLC	± —	
ANGLES	± —	
FINISH		

	DATE	DESCRIPTION	AMOUNT	CHECK NO.	BANK	INITIALS
		MATERIAL				

ANGLES
FINISH

DWN

CHK

APVD

PRODUCT SPEC

APPLICATION SPEC

WEIGHT

CUSTOMER DRAWING



Tyco Electronics Corporation
Taipei, Taiwan

NAME _____

PCI EXPRESS CARD EDGE CONN.
V-TYPE

SIZE	
------	--

CAGE CODE	
-----------	--

DRAWING NO.	
-------------	--

RESTRICTED TO

A3

00779

9 | **C-**1612163

SCALE 5.1

SHEET 2 OF 2

REV	K
-----	---