


91601-314LF - DUBOX™ : 14

Position Vertical Card
Connector, Surface Mount,
Single row, Dual entry



www.fci.com

Mating Half

➤ 77311-401-14LF

➤ 95293-101-14LF

Specifications

General

Hold Down Style	No Locating Pegs
Number of contacts (per row)	14
Number of contacts (Total)	14
Number of rows	1
Orientation	Vertical
Packaging	Tube
Mating half	Mates with 0.64 mm (0.025 in.) Square pins.
Series Number	91601

Dimensional

Thickness (Board)	1.6 mm (0.062 in.) or 2.36 mm (0.093 in.)
Footprint (Board)	2.54 mm x 4.2 mm (0.1 in. x 0.165 in.)

Electrical

Current rating	3A max. per Contact/2A max. per Contact for Full Load
Resistance (Contact)	15 milli ohms Initial, 20 milli ohms After test
Resistance (Insulation)	100000 M-ohms
Voltage rating	1000V rms

Mechanical

Insertion force	1.50N (150 gf) per Contact
Withdrawal Force	0.3N (30 gf) min. per Contact

Mounting

Solder process	Compatible with Wave, Vapor - Phase
----------------	-------------------------------------

Physical

Color (Housing)	Grey
Material (Contact)	Phosphor Bronze
Material (Housing)	High Temperature Thermoplastic
Plating (Contact area)	0.76 µm (30 µin.) Gold
Plating (Tail)	2.54 µm (100 µin.) Tin
Underplating (Contact)	1.27 µm (50 µin.) Nickel
Flammability rating	UL 94 V-0

Temperature (Range)	-65 °C to +125 °C
Approvals / Certifications	
UL File Number	E66906
Approvals / Certifications	UL and CSA Approved

PRODUCT NUMBER
91601-YXXZLF

INDICATES THE PRODUCT IS RoHS COMPATIBLE, NOTE 6.

- A: TAPE & REEL PACKAGING, HOUSING AND PICK-UP CAP COLOUR GREY
G: TAPE & REEL PACKAGING, HOUSING AND PICK-UP CAP COLOUR BLACK FOR AVAILABILITY, SEE TA856.
AV: TAPE & REEL PACKAGING FOR VALEO, HOUSING AND PICK-UP CAP COLOUR GREY.

NUMBER OF POSITIONS: 02 UP TO 25.
MORE THAN 25 POSITIONS ON SPECIAL REQUEST.



PLATING CODE

- 3= 0.76µm GOLD ON CONTACT AREA.
3.81µm TIN-LEAD ON TAIL.
4= 5µm TIN-LEAD ON CONTACT AREA.
3.81µm TIN-LEAD ON TAIL.


WHEN SUFFIX "LF" IS REQUIRED, 2µm MIN MATTE TIN OVER 1.27 MIN Ni IS SUPPLIED INSTEAD OF SnPb.

NOTES:

- 1 - HOUSING & PICK UP CAP MATERIAL: HIGH TEMPERATURE THERMOPLASTIC GLASS FILLED FLAME RETARDANT PER UL 94 COLOR: GREY or BLACK
- 2 - TERMINAL MATERIAL: PHOSPHOR BRONZE.
- 3 - 2 UP TO 4 POSITIONS PRODUCT PACKED IN PLASTIC BOX.
5 UP TO 30 POSITIONS PRODUCT PACKED IN TUBE.
- 4 - TO DETERMINE DIMENSIONS:
N = NUMBER OF POSITIONS
EXAMPLE: 8 POS: (N×2.54)−0.08=20.24 mm.
- 5 - RECOMMENDED IR PROFILE PER TA842.
- 6 - RoHS COMPATIBLE PRODUCT SPECIFICATIONS
 - a - PLATING:
 - "LF" MEANS THE PRODUCT IS LEAD-FREE, 2µm MINIMUM MATTE TIN OVER 1.27µm MINIMUM NICKEL UNDERPLATE.
 - b - MANUFACTURING PROCESS COMPATIBILITY
 - THE HOUSING WILL WITHSTAND EXPOSURE TO 260°C PEAK TEMPERATURE FOR 30 SECONDS MAX IN A CONVECTION, INFRA-RED OR VAPOR PHASE OR REFLOW OVEN.
 - c - LABELING:
 - MEETS PACKAGING SPECS AS PER GS-14-920
 - d - LEGAL STATEMENT: SEE GS-22-008
- 7 - HOUSING MADE FROM HIGH TEMPERATURE HALOGEN FREE RESIN 30% GLASSFILLED FLAME RETARDANT PER UL-94V-0 BLACK COLOUR. OMIT 'HF' FROM PRODUCT NUMBER IF HTIS OPTION IS NOT REQUIRED
- 8 - END STAND-OFFS FOR 1x2 UP TO 1x5 POS
NO END STAND-OFFS FOR 1x6 UP TO 1x50 POS

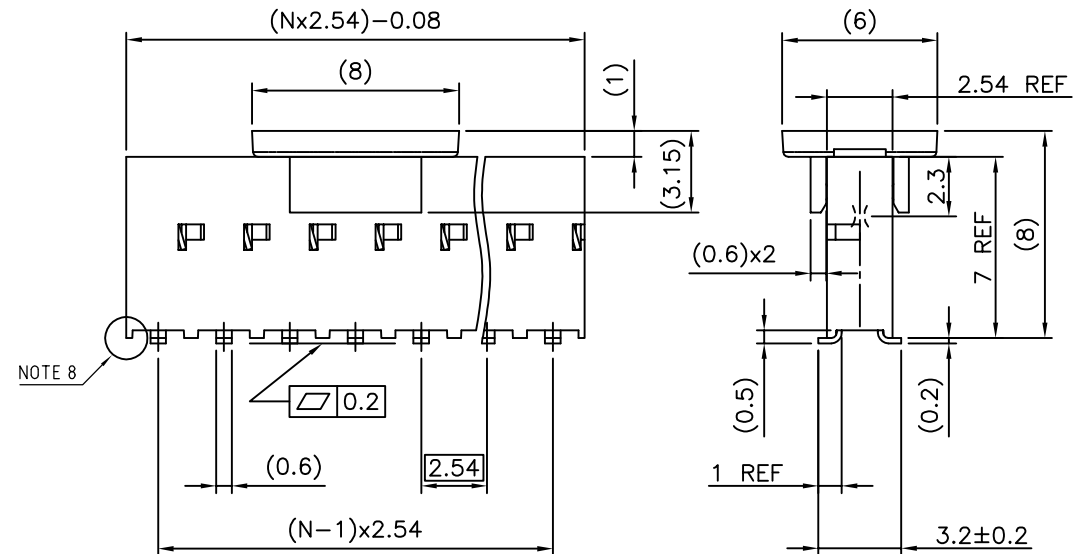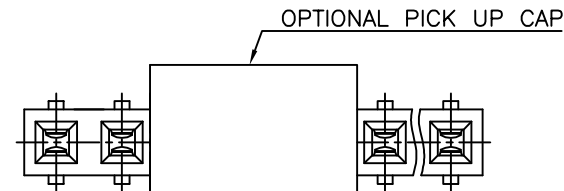

mat'l. code				surface		tolerance	projection	product family	
SEE NOTES				ISO 1302	ISO 406	ISO 1101		DUBOX	
ltr	ecn no	dr	date	tolerances unless otherwise specified			mm	title	
AD	F10-0228	JCO	10.10.04	angles		.0±.3		BtB RECEPT VERT SR SMT	
AE	F11-0093	JCO	11.08.18	linear		.00±.0x			
AF	F11-0043	LMU	12.02.23	0°±2'		.000±.00x	scale 5:1	dwg no	
AA	F07-0234	LMU	07.07.10	dr	D LEGRAND	96.10.11	FCI	sheet 1 of 2	
AB	F07-0245	PNZ	07.08.14	engr	P NIZZI	96.10.11		91601	
AC	F08-0102	PNZ	08.01.18	chr	D LE	96.10.11		A3	
AC	F08-0102	PNZ	08.01.18	appd	P NZ	96.10.11		type Product Customer Drawing	
sheet index	revision	AF	B						
	sheet	1	2						

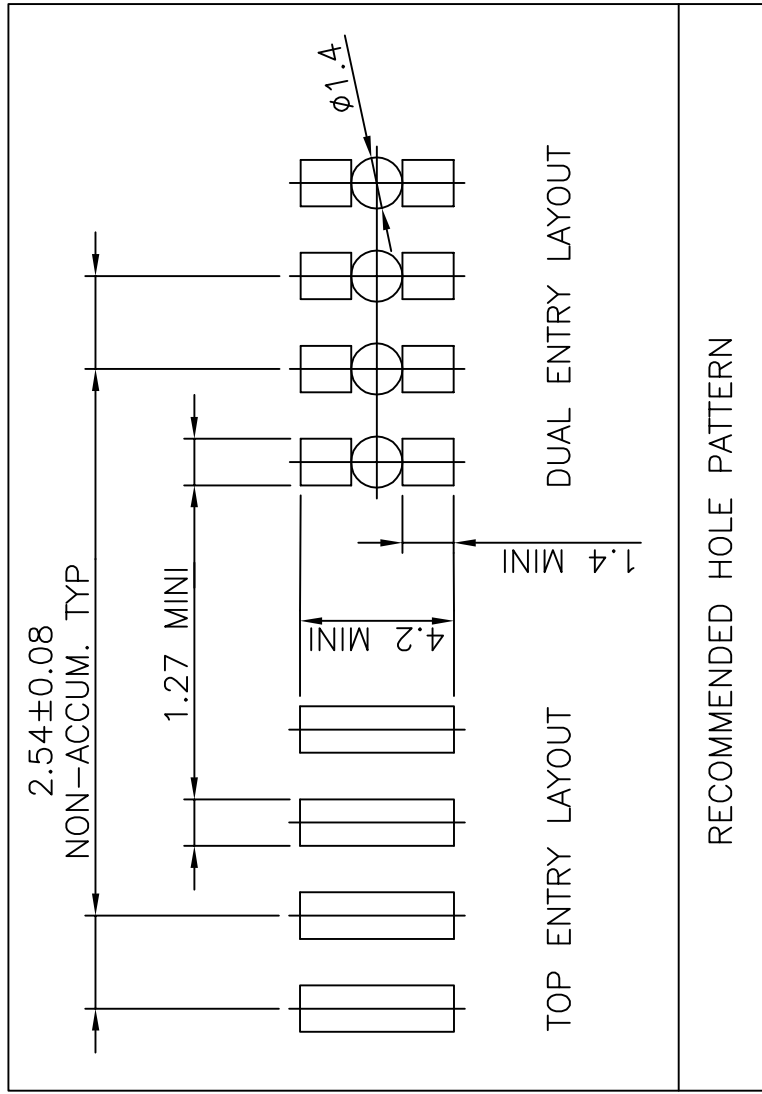[illegible]