
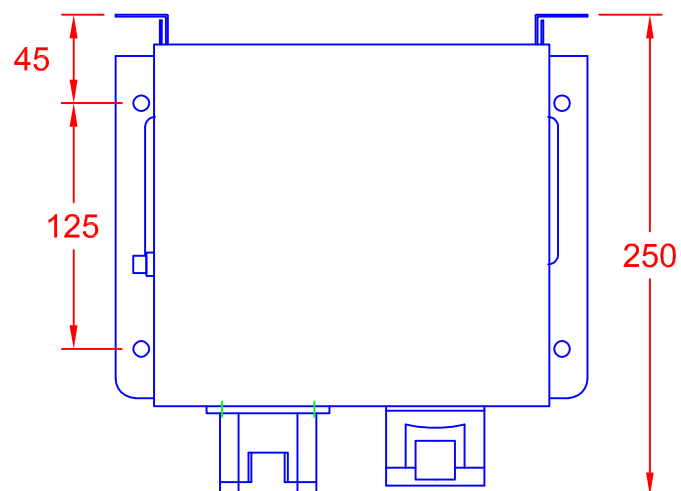
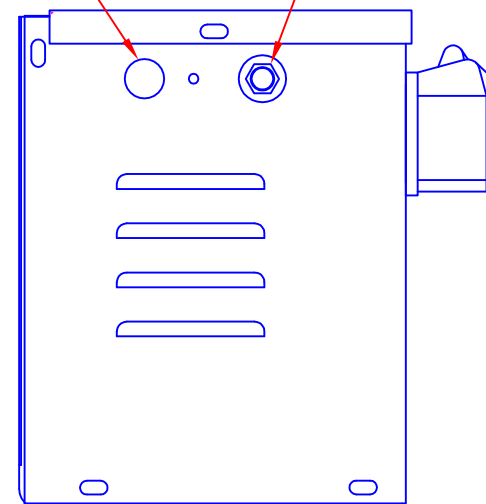


TOLERANCES (UNLESS SPECIFIED)	
0-10mm	±0.2mm
10.1-50mm	±0.5mm
50.1-250mm	±1.0mm
>250mm	±2.0mm

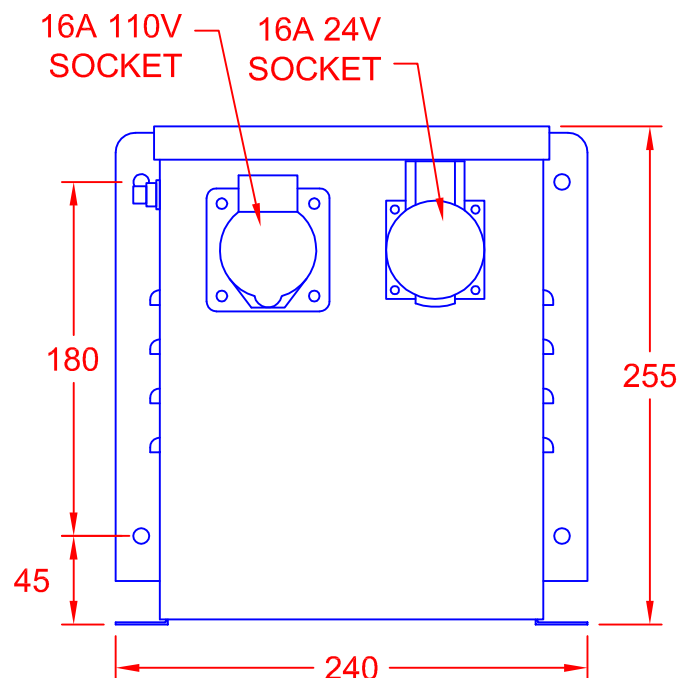

WALL MOUNTING ISOLATION TRANSFORMER

MODEL: CM2250WM/110/24

INPUT: 230V, 50Hz

OUTPUT1: 55V-0-55V

OUTPUT2: CENTRE TAP EARTHED

SOCKETS: 24V

RATING 110V: 1x 16A 110V (BS EN 60309)

RATING 24V: 1x 16A 24V (BS EN 60309)

THERMAL CUTOUT: 2.0kVA INTERMITTENT (5 MINS ON, 15 MINS OFF)

ENCLOSURE: 200VA CONTINUOUS

COLOUR: 3A THERMAL CUTOUT

PAINTED STEEL

RATED IP22

RAL 7032

REV	4	CARROLL & MEYNELL TRANSFORMERS LIMITED TEL: 01642 617406 FAX: 01642 614178 enquiries@carroll-meynell.com	TITLE	CM2250WM/110/24	DRAWN	PROJECTION	DATE	SCALE
	3			SH		12/5/8	NTS	
	2				DRAW No		REV	PAGE
	1				3276	0	1/1	
			ALL DIMENSIONS IN mm					