

Series C95



**ISO Cylinder
Large Bore Size Type
ø125, ø160, ø200, ø250**

ISO/VDMA Cylinder: Large Bore Size Type Double Acting, Single Rod

Series C95

ø125, ø160, ø200, ø250

How to Order

Without auto switch C95S **B** **125** **100**

With auto switch C95SD **B** **125** **100** **A53** **S**

Built-in magnet • **Mounting style** • **Bore size** • **Stroke (mm)** • **Number of auto switches** • **Auto switch**

Mounting style	Stroke (mm)	Number of auto switches
B Basic/without bracket style	125 125 mm	Nil 2 pcs.
L Axial foot style	160 160 mm	S 1 pc.
F Rod side flange style	200 200 mm	3 3 pcs.
G Head side flange style	250 250 mm	n n pcs.
C Single clevis style		
D Double clevis style		
T Center trunnion style		

Refer to Standard Stroke* on page 5.

For the applicable auto switch model, refer to the table below.

Applicable Auto Switch/Tie-rod Mounting

Type	Special function	Electrical entry	Indicator light	Wiring (Output)	Load voltage		Auto switch model			Lead wire length (m)			Applicable load		
					DC	AC	Tie-rod mounting	Band mounting	0.5 (Nil)	3 (L)	5 (Z)				
Reed switch	—	Grommet	Yes	3-wire (NPN) (Equiv. to NPN)	24 V	5 V	—	A56	—	●	●	—	IC		
						12 V	100 V, 200 V	A53	—	●	●	●	—		
				2-wire	5 V, 12 V	—	A67	—	●	●	—	IC			
					12 V	200 V or less	A64	—	●	●	—	—			
				Diagnostic indication (2-color)	Yes	3-wire	5 V	—	Z76	—	●	●	—	IC	
	12 V	AC 100	Z73				—	●	●	●	—				
	—	Terminal conduit	Yes	2-wire	24 V	5 V, 12 V	100 V or less	Z80	—	●	●	—	IC		
						12 V	—	A33	—	—	—	—	—	PLC (Note)	
						—	—	A34	—	—	—	—	—	PLC (Note)	
						—	—	A44	—	—	—	—	—	Relay, PLC (Note)	
—						—	—	—	—	—	—	—	—		
Solid state switch	—	Grommet	Yes	3-wire (NPN)	24 V	5 V, 12 V	—	F59	—	●	●	○	IC		
				3-wire (PNP)		—	—	100 V, 200 V	F5P	—	●	●	○	—	
				2-wire	12 V	—	J51	—	●	●	○	—			
					12 V	—	J59	—	●	●	○	—			
				Diagnostic indication (2-color)	Yes	3-wire (NPN)	24 V	5 V, 12 V	—	F59W	—	●	●	○	IC
						3-wire (PNP)		—	F5PW	—	●	●	○	—	
	Water resistant (2-color) With timer	Yes	2-wire	12 V	—	J59W	—	●	●	○	—				
			—	—	F5BAL	—	—	●	○	—					
	Diagnostic output (2-color)	Yes	3-wire (NPN)	24 V	5 V, 12 V	—	F5NTL	—	—	●	○	IC			
			4-wire (NPN)		—	F59F	—	●	●	○	—				
	—	Terminal conduit	Yes	2-wire	24 V	5 V, 12 V	—	Y59A	—	●	●	○	IC		
						12 V	—	Y59B	—	●	●	○	—		
						3-wire (PNP)	5 V, 12 V	—	Y7P	—	●	●	○	—	
						3-wire (NPN)		—	Y7NW	—	●	●	○	IC	
						Diagnostic indication (2-color)	Yes	3-wire (PNP)	—	Y7PW	—	●	●	○	—
								2-wire	12 V	—	Y7BW	—	●	○	—
	Water resistant (2-color)	Yes	3-wire (NPN)	24 V	5 V, 12 V	—	Y7BAL	—	—	●	○	—			
			2-wire		12 V	—	G39	—	—	—	—	IC			
—	Terminal conduit	Yes	2-wire	24 V	5 V, 12 V	—	K39	—	—	—	—				
					12 V	—	—	—	—	—	—	—			

* Lead wire length symbols: J: 3 m, Nil, Example) A53
 3: 3 m, Example) A53L
 5: 5 m, Example) A53Z
 (Note) Switch can not be mounted on ø250.
 Refer to page 12 for details of applicable auto switches in addition to those listed above.

Mounting Bracket Part No.

Bore size (mm)	125	160	200	250
Foot ⁽¹⁾	L5125	L5160	L5200	L5250
Flange	F5125	F5160	F5200	F5250
Single clevis	C5125	C5160	C5200	C5250
Double clevis	D5125	D5160	D5200	D5250

Note 1) Two foot brackets and mounting bolts (4 pieces) are included in this kit. (ø125 to ø250)

Note 2) Accessories for mounting brackets are as follows

Foot, Flange, Single clevis: Mounting bolts
 Double clevis: Clevis pin, Retaining rings, Mounting bolts





Auto Switch Mounting Bracket Part No.

Bore size (mm)	125	160	200	250
D-A3/A4/K3/G3	BS1-125	BS1-160	BS1-200	
D-A5/A6/F5/J5	BT-08	BT-16	BT-16	3T-20
D-Z□/Y□	BA4-080	BS4-160	BS4-160	




Series C95

Accessory

Mounting Accessory, Cylinder

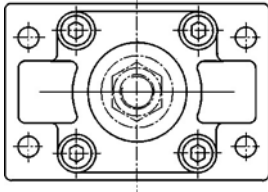	F Rod/Head side flange	D Female head side clevis (Corresponds to E accessories)	C Male head side clevis
Bore size (mm)	 <p>Supplied with 4 screws</p>	 <p>Supplied with bolt, safety device and 4 screws</p>	 <p>Supplied with 4 screws</p>
125 160 200 250	<p><u>Without lock</u></p> <p>F5125 F5160 F5200 F5250</p> <p>See page 8 for dimensions.</p>	<p>D5125 D5160 D5200 D5250</p> <p>See page 8 for dimensions</p>	<p>C5125 C5160 C5200 C5250</p> <p>See page 9 for dimensions.</p>
Bore size (mm)	L Foot  <p>Supplied with two pieces Supplied with 4 screws</p>		
125 160 200 250	<p>L5125 L5160 L5200 L5250</p> <p>See page 8 for dimensions.</p>		

Mounting Accessory, Rod

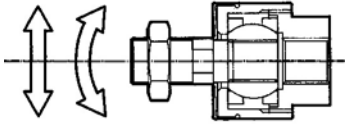
	GKM Rod clevis ISO 8140	KJ Piston rod ball joint ISO 8139	JA Floating joint
Bore size (mm)	 <p>Supplied with bolts and safety devices</p>		
125 160 200 250	<p>GKM30-54 GKM35-54 GKM35-54 GKM40-84</p> <p>See page 10 for dimensions.</p>	<p>KJ27D KJ36D KJ36D KJ42D</p> <p>See page 10 for dimensions.</p>	<p>JA125-27-200 JA160-36-200 JA160-36-200</p> <p>See page 10 for dimensions.</p>

ISO/VDMA Cylinder: Standard Type Double Acting, Single/Double Rod **Series C95**

Specifications

Bore size (mm)	125	160	200	250
Action	Double acting			
Fluid	Air			
Proof pressure	1.5 MPa			
Max. operating pressure	1.0 MPa			
Min. operating pressure	0.05 MPa			
Ambient and fluid temperature	Without auto switch: -10 to 70°C (No freezing) With auto switch: -10 to 30°C (No freezing)			
Lubrication	Not required (Non-lube)			
Operating piston speed	50 to 700 mm/sec	50 to 300 mm/sec		
Allowable stroke tolerance	Up to 250: $+1.0$ / -0 , 251 to 1000: $+1.4$ / -0 , 1001 to 1500: $+1.8$ / -0			
Cushion	Both ends (Air cushion)			
Thread tolerance	JIS Class 2			
Port size	G 1/2	G 3/4		3
Mounting	Basic style, Axial foot style, Rod side flange style, Head side flange style, Single clevis style, Double clevis style, Center trunnion style			

JIS Symbol
Double acting



Minimum Stroke for Auto Switch Mounting

Refer to page 12 for "Minimum Stroke for Auto Switch Mounting"

Standard Stroke

Bore size (mm)	Max. * stroke
125	600
160	600
200	2000
250	2400

Intermediate strokes are available.

* Please consult with SMC for longer strokes.

Theoretical Output

Bore size (mm)	Rod diameter (mm)	Operating direction	Piston area (mm ²)	Operating pressure (MPa)								
				0.2	0.3	0.4	0.5	0.6	0.7	0.8	0.9	1.0
125	32	OUT	12272	2454	3682	4909	6136	7363	8590	9818	11045	12272
		IN	11468	2294	3440	4587	5734	6881	8028	9174	10321	11468
160	40	OUT	20106	4021	6032	8042	10053	12064	14074	16085	18095	20106
		IN	18850	3770	5655	7540	9425	11310	13195	15080	16965	18850
200	40	OUT	31416	6283	9425	12566	15708	18850	21991	25133	28274	31416
		IN	30159	6032	9048	12064	15080	18095	21111	24127	27143	30159
250	50	OUT	49087	9817	14726	19635	24544	29452	34361	39270	44178	49087
		IN	47124	9425	14137	18850	23562	28274	32987	37699	42412	47124


Note) Theoretical force (N) = Pressure (MPa) x Piston area (mm²)

Weight/Aluminum Tube


Bore size (mm)		125	160	200	250
Basic weight	Basic style	7.45	14.54	20.20	31.11
	Foot style	2.60	4.90	7.76	11.30
	Flange style	4.10	2.45	11.75	20.29
	Single clevis style	4.15	6.90	9.10	13.30
	Double clevis style	4.25	6.30	9.25	13.46
	Trunnion style	2.98	4.50	7.23	11.40
Additional weight per each 50 mm of stroke	All mounting brackets	0.54	0.83	0.90	1.30
Accessory	Single rod clevis	1.20	1.62	1.62	2.76
	Double clevis (With pin)	1.84	3.92	3.92	5.39

Calculation: (Example) CP95SD160-100

- Basic weight 14.54 (kg) (Basic, 160)
- Mounting 11.30 (kg) (Double clevis)
- Additional weight 0.83 (kg/50 stroke)
- Cylinder stroke 100 (stroke)
- 14.54 + 11.30 + 0.83 x 100 = 26.67 kg




Allowable Kinetic Energy

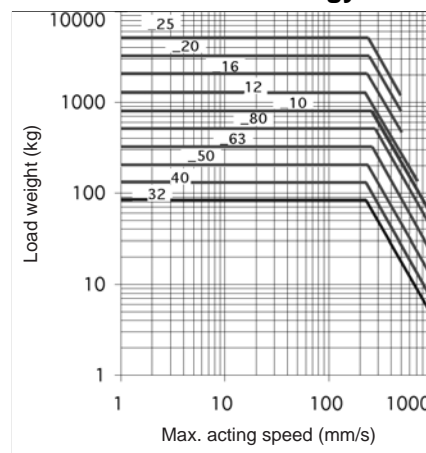

Series C95

Construction

First angle projection

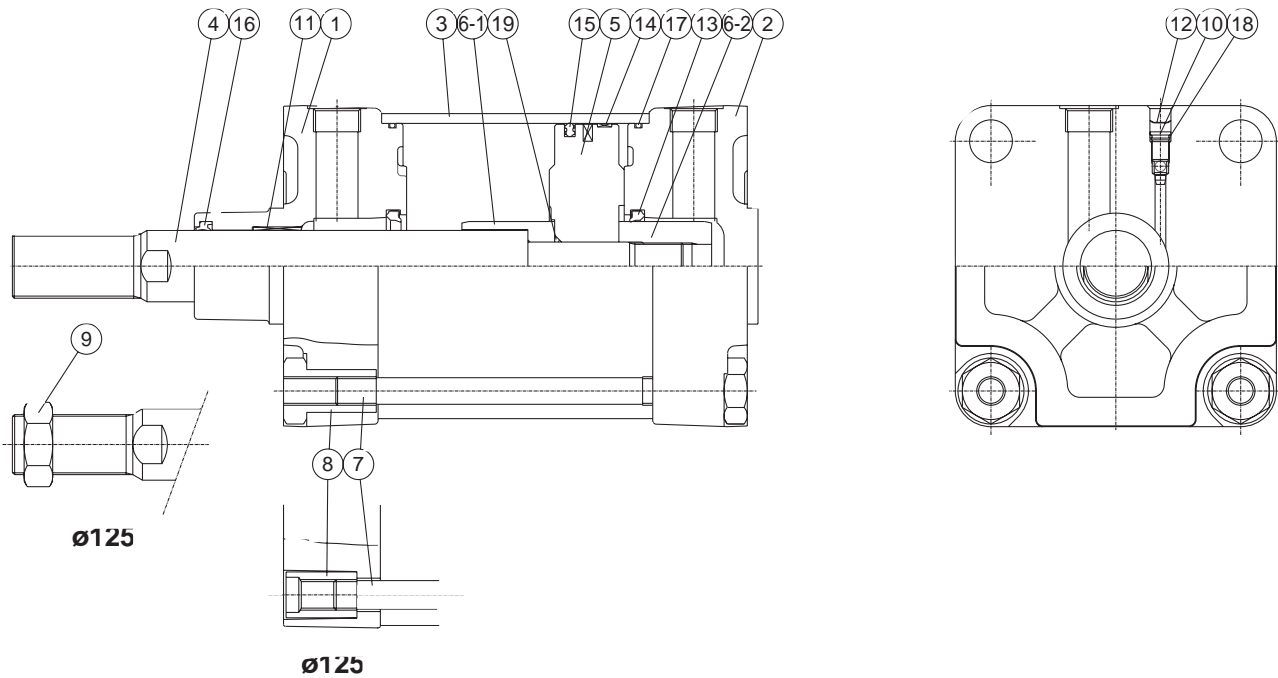

Component Parts

No.	Description	Material	Qty.	Note
①	Rod cover	Aluminum die-casted	1	Only ø125
②	Head cover	Aluminum die-casted	1	Only ø125
③	Cylinder tube	Aluminum alloy	1	
④	Piston rod	Carbon steel	1	
⑤	Piston	Aluminum alloy	1	
⑥①	Cushion ring A	Rolled steel	1	
⑥②	Cushion ring B	Rolled steel	1	
⑦	Tie-rod	Carbon steel	4	
⑧	Tie-rod nut	Steel	8	
⑨	Rod end nut	Steel	1	Only ø125
⑩	Cushion valve	Steel wire	2	
⑪	Bushing	Lead-bronze casted	1	
⑫	Snap ring	Steel for spring	2	
⑬	Cushion seal	Urethane	2	
⑭	Wear ring	Resin	1	
⑮	Piston seal	NBR	1	
⑯	Rod seal	NBR	1	
⑰	Cylinder tube gasket	NBR	2	
⑱	Cushion valve seal	NBR	2	
⑲	Piston gasket	NBR	1	
⑳	Magnet ring		1	

ø160 to ø250

No.	Description	Material	Qty.	Note
①	Rod cover	Aluminum casted	1	
②	Head cover	Aluminum casted	1	

Replacement Parts: Seal Kit

Bore size (mm)	Kit no.	Contents
125	CS95-125	Kits include items ⑬ to ⑰ from the table above.
150	CS95-160	
200	CS95-200	
250	CS95-250	



* Seal kits consist of items ⑬ to ⑰ contained in one kit, and can be ordered using the order number for each respective tube bore size.

ISO/VDMA Cylinder: Standard Type Double Acting, Single/Double Rod **Series C95**

Dimensions Without Mounting Bracket

[First angle projection]

C95SB Bore size - Stroke

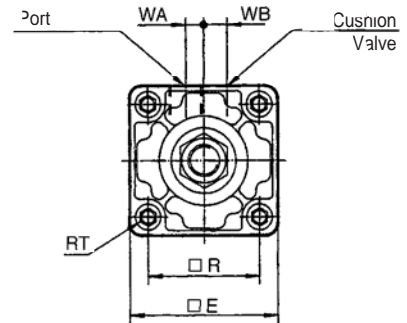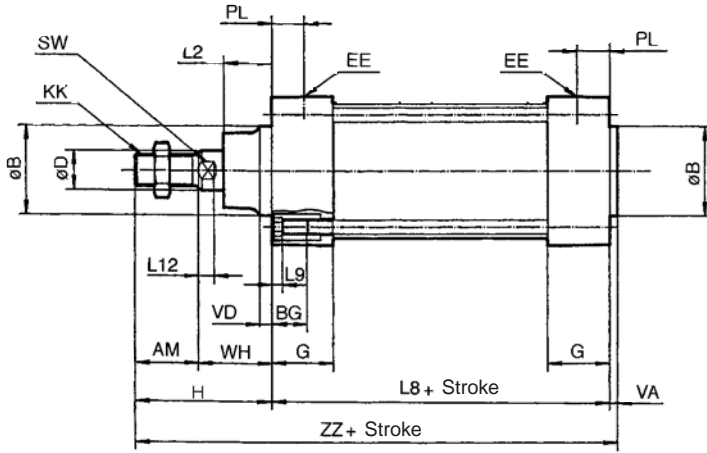


Bore size (mm)	AM	øB e11	øD	EE	PL	RT	L12	KK	SW	G	BG (Min.)	L8	VD	VA	WA	WB	WH	ZZ	□E	□R	L2	L9
125	54	60	32	G 1/2	19	M12 x 1.75	13	M27 x 2	27	38	20	160	10	6	17	15	65	285	136	110	40	6
160	72	65	40	G 3/4	30	M16 x 2	15	M36 x 2	36	55	27	180	8	6	15	25	80	338	180	140	50	0
200	72	75	40	G 3/4	35	M16 x 2	15	M36 x 2	36	57	27	180	15	6	18	25	95	353	220	175	55	J
250	84	90	50	G 1	31	M20 x 2.5	20	M42 x 2	46	59	29	200	20	10	20	28	105	399	270	220	65	0

Series C95


Dimensions Cylinder Mounting Accessory

[First angle projection]


Foot style (L)

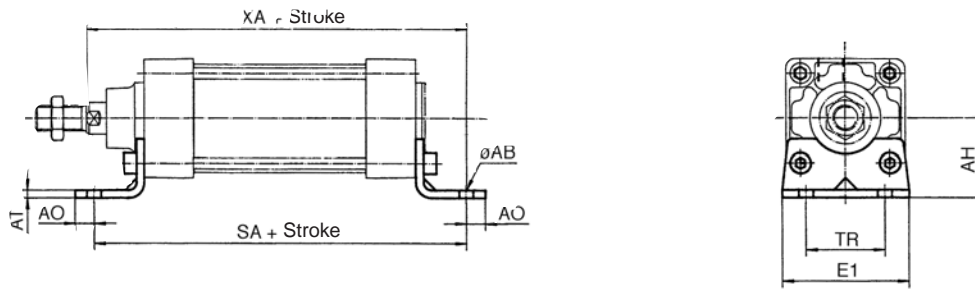


Center trunnion style (T)

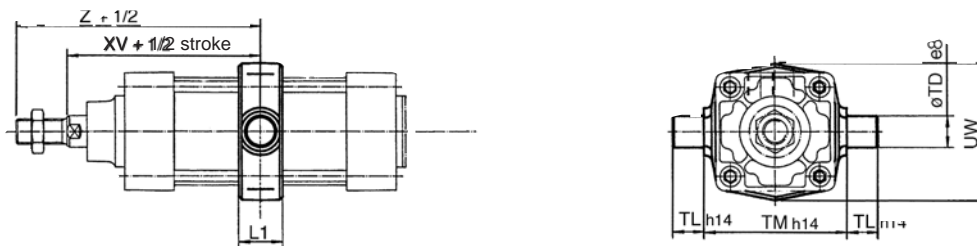

Flange style (F, G)

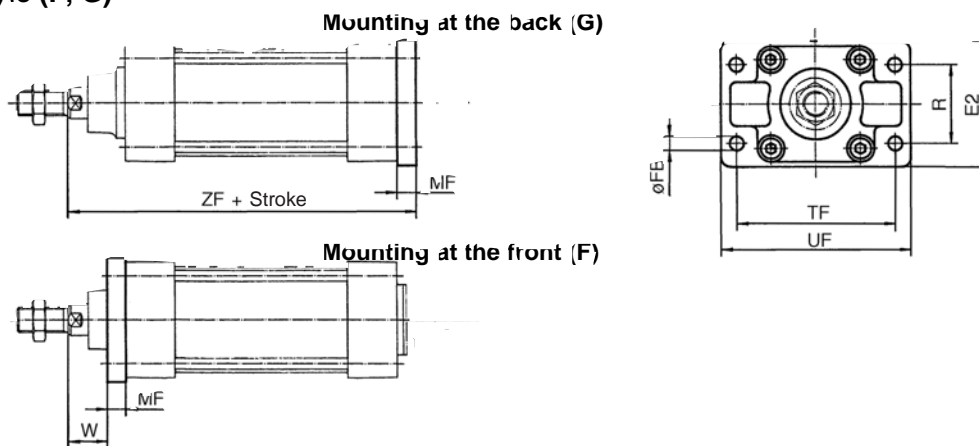

Head side single clevis style (C) Head side double clevis style (D)

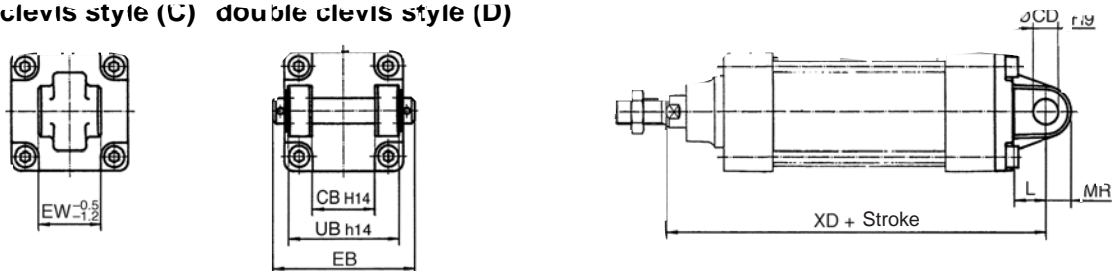

Bore (mm)	E1	R	W	MF	ZF	øFB	øCD H9	EB	L	XD	UB h14	CB H14	EW -0.5/-1.2	MR	TR	AO	AT	XA	SA	AH	øAB	L1	XV	Z	TL h14	øTD e8	TM h14	UW	TF	UF	E2
125	Max. 157	90	45	20	245	16	25	Max. 157	Min. 30	275	130	70	70	Max. 26	90	Max. 25	8	270	250	90	16	Max. 50	145	199	25	25	160	Max. 160	180	Max. 224	Max. 107
160	Max. 195	115	60	20	280	18	30	Max. 209	Min. 35	315	170	90	90	Max. 31	115	Max. 25	9	320	300	115	18	Max. 50	170	242	32	32	200	Max. 220	230	Max. 280	Max. 195
200	Max. 238	135	70	25	300	22	30	Max. 209	Min. 35	335	170	90	90	Max. 31	135	Max. 35	12	345	320	135	22	Max. 50	185	257	32	32	250	Max. 260	270	Max. 320	Max. 238
250	Max. 290	165	80	25	330	26	40	Max. 249	Min. 45	375	200	110	110	Max. 41	165	Max. 40	14.5	380	350	165	26	Max. 60	205	289	40	40	320	Max. 320	330	Max. 395	Max. 290



ISO/VDMA Cylinder: Standard Type
Double Acting, Single/Double Rod **Series C95**

Dimensions Cylinder Mounting Accessory C, D, E and CP

[First angle projection]

Mounting style (C)

Mounting style (D)

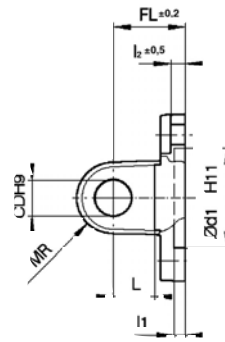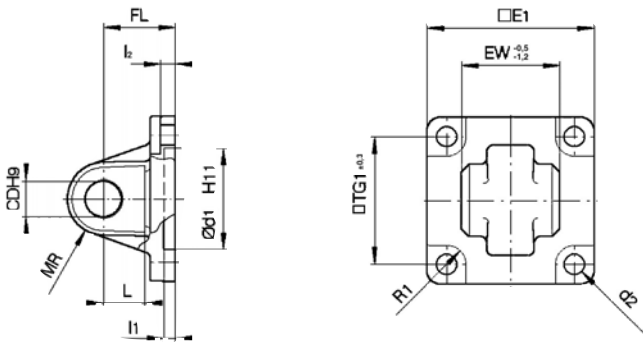

Bore size (mm)	□E1	EW	□TG1	FL	l1	l2	ød1	CD	MR	d2	R1	□E2	UB	CB
125	140	70	110	50	7	10	60	25	25	13.5	10	140	130	70
160	180	90	140	55	7	10	65	30	25	18	13	180	170	90
200	220	90	175	60	7	11	75	30	25	18	13	220	170	90
250	270	110	220	70	11	11	90	40	40	22	16.5	270	200	110


Series C95

Dimensions Piston Rod Mounting Accessory

[First angle projection]


Piston Rod Clevis (ISO 8140) Steel, Zinc Chromate Plated

Part no.	Bore size (mm)	e	b	d	øf h11	L1 max.	c min.	a max.	L min.
GKM30-54	125	M27 x 2	30 +0.60 +0.15	110	30	155	54	55	45
GKM35-54	160/200	M36 x 2	35 +0.60 +0.15	144	35	201	54	70	57
GKM40-84	250	M42 x 2	40 +0.60 +0.15	168	40	245	84	85	77

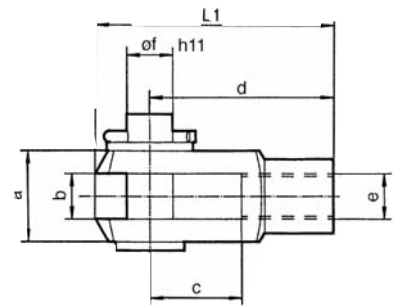

Piston Rod Ball Joint (ISO 8139) Steel, Zinc Chromate Plated

Part no.	Bore size (mm)	d3	d1 H9	h	d6 max.	b1 h12	L min.	α	L3
KJ27D	125	M27 x 2	30	110	70	37	51	15°	35
KJ36D	160/200	M36 x 2	35	125	80	43	56	16°	55
KJ42D	250	M42 x 2	40	142	90	49	60	4°	46

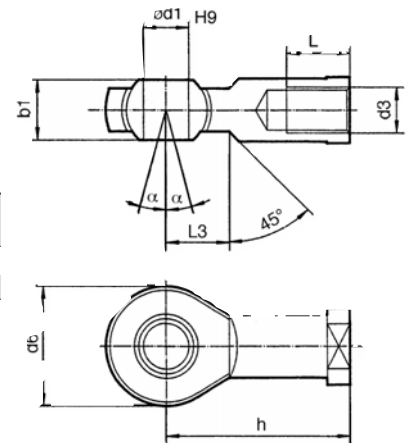


Dimensions: Piston Rod Mounting Accessory

[First angle projection]

Floating Joint JA Steel

Bore size (mm)	M	Part no.	A	B	C	øD	E	F	G	H	P	U	Load (kN)	Weight (g)	Angle
125	M27 x 2	JA125-27-200	123	34	38	66	13	24	20	41	24	2	28	1500	± 5°
160, 200	M36 x 2	JA160-36-200	178	51	55	96	16	55	24	55	42	3	71	4700	

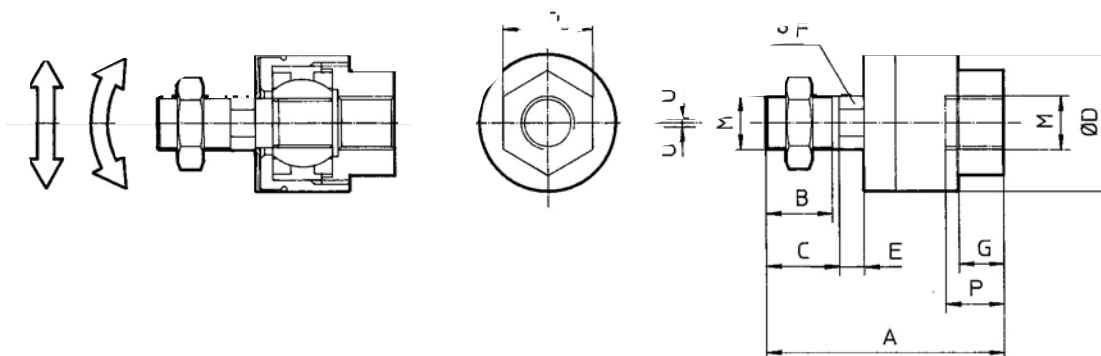

ISO/VDMA Cylinder: Standard Type
Double Acting, Single/Double Rod *Series C95*

Series C95

Auto Switch Specifications



Applicable Auto Switch

Type	Auto switch model	Electrical entry (Function)
Reed switch	D-A5□/A6□	Grommet
	D-A59W	Grommet (2-color indication)
	D-Z7□/Z80	Grommet
	D-A3□	Terminal conduit
	D-A44	DIN terminal
Solid state switch	D-F5□/J5□	Grommet
	D-F5□W/J59W	Grommet (2-color indication)
	D-F5BAL	Grommet (2-color indication, Water resistant)
	D-F59F	Grommet (2-color indication, Diagnostic output)
	D-F5NTL	Grommet (With timer)
	D-Y59□	Grommet (In-line)
	D-Y69□	Grommet (Perpendicular)
	D-Y7P	Grommet (In-line)
	D-Y7PV	Grommet (Perpendicular)
	D-Y7□W	Grommet (2-color indication, In-line)
	D-Y7□WV	Grommet (2-color indication, Perpendicular)
	D-Y7BAL	Grommet (Water resistant, In-line)
	D-G39/K39	Terminal conduit

Minimum Stroke for Auto Switch Mounting

Auto switch model	No. of auto switches	Support bracket except center trunnion				Center trunnion			
		ø125	ø160	ø200	ø250	ø125	ø160	ø200	ø250
A5□ A6□	1, 2	15	10	10	10	165	125	125	145
	n	15 + 55(n-2)/2 n = 2, 4, 6, 8...	10 + 55(n-2)/2 n = 2, 4, 6, 8...	←	←	165 + 55(n-4)/2 n = 4, 8, 12, 16...	125 + 55(n-4)/2 n = 4, 8, 12, 16...	125 + 55(n-4)/2 n = 4, 8, 12, 16...	145 + 55(n-4)/2 n = 4, 8, 12, 16...
A59W	2	20	←	←	←	175	135	135	155
	n	20 + 55(n-2)/2 n = 2, 4, 6, 8...	←	←	←	175 + 55(n-4)/2 n = 4, 8, 12, 16...	135 + 55(n-4)/2 n = 4, 8, 12, 16...	135 + 55(n-4)/2 n = 4, 8, 12, 16...	155 + 55(n-4)/2 n = 4, 8, 12, 16...
	1	20	15	15	15	175	135	135	155
F5□(W)/J5□/J59W F5BAL/F59F	1, 2	20	10	←	←	170	135	135	155
	n	20 + 55(n-2)/2 n = 2, 4, 6, 8...	10 + 55(n-2)/2 n = 2, 4, 6, 8...	←	←	175 + 55(n-4)/2 n = 4, 8, 12, 16...	135 + 55(n-4)/2 n = 4, 8, 12, 16...	135 + 55(n-4)/2 n = 4, 8, 12, 16...	155 + 55(n-4)/2 n = 4, 8, 12, 16...
F5NTL	1, 2	25	15	15	15	185	150	145	165
	n	25 + 55(n-2)/2 n = 2, 4, 6, 8...	15 + 55(n-2)/2 n = 2, 4, 6, 8...	←	←	185 + 55(n-4)/2 n = 4, 8, 12, 16...	150 + 55(n-4)/2 n = 4, 8, 12, 16...	145 + 55(n-4)/2 n = 4, 8, 12, 16...	165 + 55(n-4)/2 n = 4, 8, 12, 16...
A3□ K3□ G3□	1	10	10	10	—	130	140	140	—
	2 (Same side)	100	100	100	—	130	140	140	—
	2 (Different sides)	35	35	35	—	130	140	140	—
	n (Same side)	100 + 100(n-2) n = 2, 3, 4, 5...	←	←	—	130 + 100(n-2) n = 2, 4, 6, 8...	140 + 100(n-2) n = 2, 4, 6, 8...	140 + 100(n-2) n = 2, 4, 6, 8...	—
A44	n (Different sides)	35 + 30(n-2) n = 2, 3, 4, 5...	←	←	—	130 + 100(n-2) n = 2, 4, 6, 8...	140 + 100(n-2) n = 2, 4, 6, 8...	140 + 100(n-2) n = 2, 4, 6, 8...	—
	1	10	10	10	—	135	100	100	—
	2 (Same side)	55	55	55	—	135	100	100	—
	2 (Different sides)	35	35	35	—	135	100	100	—
Z7□/Z80	n (Same side)	55 + 55(n-2) n = 2, 3, 4, 5...	←	←	—	135 + 100(n-2) n = 2, 4, 6, 8...	100 + 100(n-2) n = 2, 4, 6, 8...	100 + 100(n-2) n = 2, 4, 6, 8...	—
	n (Different sides)	35 + 30(n-2) n = 2, 3, 4, 5...	←	←	—	135 + 100(n-2) n = 2, 4, 6, 8...	100 + 100(n-2) n = 2, 4, 6, 8...	100 + 100(n-2) n = 2, 4, 6, 8...	—
	1, 2	10	10	10	—	150	120	110	—
	n	10 + 40(n-2)/2 n = 2, 4, 6, 8...	←	←	—	150 + 55(n-4)/2 n = 4, 8, 12, 16...	120 + 55(n-4)/2 n = 4, 8, 12, 16...	110 + 55(n-4)/2 n = 4, 8, 12, 16...	—
Y59□/Y7P Y7□W	1, 2	10	10	10	—	150	110	110	—
	n	10 + 40(n-2)/2 n = 2, 4, 6, 8...	←	←	—	150 + 55(n-4)/2 n = 4, 8, 12, 16...	110 + 55(n-4)/2 n = 4, 8, 12, 16...	110 + 55(n-4)/2 n = 4, 8, 12, 16...	—
Y69□/Y7PV Y7□WV	1, 2	10	10	10	—	120	85	80	—
	n	10 + 30(n-2)/2 n = 2, 4, 6, 8...	←	←	—	120 + 55(n-4)/2 n = 4, 8, 12, 16...	85 + 55(n-4)/2 n = 4, 8, 12, 16...	80 + 55(n-4)/2 n = 4, 8, 12, 16...	—
Y7BAL	1, 2	15	10	10	—	160	120	120	—
	n	10 + 45(n-2)/2 n = 2, 4, 6, 8...	←	←	—	160 + 55(n-4)/2 n = 4, 8, 12, 16...	120 + 55(n-4)/2 n = 4, 8, 12, 16...	120 + 55(n-4)/2 n = 4, 8, 12, 16...	—

Auto Switch Mounting Position and Mounting Height

First angle projection



Auto Switch Mounting Position

Bore size (mm)	D-A5□ D-A6□		D-A59W		D-F5□, D-F5□W D-J5□, D-J59W D-F59F, D-F5BAL		D-F5NTL		D-Z7□, D-Y59□, D-Y7BAL D-Z80, D-Y69□ D-Y7P(V), D-Y7□W(V)		D-A3□, D-G39 D-A44, D-K39	
	A	B	A	B	A	B	A	B	A	B	A	B
125	45.5	6.5	49.5	10.5	52	13	57	18	49	10	45.5	6.5
160	19.5	18.5	23.5	22.5	26	25	31	30	23	22	19.5	18.5
200	17	17	21	21	23.5	23.5	28.5	28.5	20.5	20.5	17	17
250	20	30	24	34	26.5	36.5	31.5	41.5	—	—	—	—

Auto Switch Mounting Height

Bore size (mm)	D-A5□ D-A6□ D-A59W		D-F5□, D-F5□W, D-F5NTL D-J5□, D-J59W D-F59F, D-F5BAL		D-A3□, D-G39 D-K39		D-A44		D-Z7□, D-Y59□ D-Z80, D-Y7P D-Y7□W		D-Y69□ D-Y7PV D-Y7□WV		D-Y7BAL	
	Hs	Ht	Hs	Ht	Hs	Ht	Hs	Ht	Hs	Ht	Hs	Ht	Hs	Ht
125	71.5	66.5	70.5	66.5	116	—	126	—	67.5	65	68.5	65	72	65
160	90	86	89	86	134.5	—	144.5	—	84.5	83	84.5	83	89.5	83
200	102.5	104	102	104	154	—	164	—	100.5	100.5	100.5	100.5	103	100.5
250	127	128	127	128	—	—	—	—	—	—	—	—	—	—

Switch Hysteresis

Bore size (mm)	ON-OFF switch hysteresis	
	Reed switch	Solid state switch
125 to 200	≤ 2 mm	≥ 1 mm
250	≤ 3 mm	≥ 1 mm

Other than the applicable auto switches listed in "How to Order" the following auto switches can be mounted. For detailed specifications, refer to page 12.

Type	Model	Electrical entry	Features
Solid state switch	D-F5NTL	Grommet (In-line)	With timer
	D-Y69A/Y69B/Y7PV	Grommet (Perpendicular)	2-color indication
	D-Y7NWW/Y7PWW/Y7BWW		

* With pre-wire connectors available for solid state auto switches. For details, refer to EBP.

* Normally closed (NC) contact, solid state switch (D-Y7G/Y7H type) are also available. For details, refer to EBP.



Series C95

Specific Product Precautions

Be sure to read before handling.

Adjustment

Warning

1 Do not open the cushion valve above the stopper.

Cushion valves are provided with a retaining ring (ø125 to ø250) as a stopping mechanism, and the cushion valve should not be opened above that point.

If air is supplied and operation started without confirming the above condition, the cushion valve may be ejected from the cover.

Bore size (mm)	Cushion valve	Width across flats	Socket wrench
125, 160, 200, 250	MB-A2-10-EA064	4	JIS 4648 Hex spanner wrench 4

2. Be certain to activate the air cushion at the stroke end.

When it is intended to use the cushion valve in the fully opened position, select a style with a damper. If this is not done, the tie-rods or piston rod assembly will be damaged.

3. When replacing brackets, use the hexagon wrench shown below.

Bore size (mm)	Bolt	Width across flats	Tightening torque (Nm)
125	M12 x 1.75 x 25ℓ	10	30.1
160, 200	M16 x 2 x 30ℓ	14	39
250	Foot	M20 x 2.5 x 35ℓ	33.0
	Others	M20 x 2.5 x 30ℓ	



EUROPEAN SUBSIDIARIES:



Austria

SMC Pneumatik GmbH (Austria).
Girakstrasse 8, A-2110 Korneuburg
Phone: +43 2262-62280, Fax: +43 2262-62285
E-mail: office@smc.at
http://www.smc.at



France

SMC Pneumatique, S.A.
1, Boulevard de Strasbourg, Parc Gustave Eiffel
Bussy Saint Georges F-77607 Marne La Vallée Cedex 3
Phone: +33 (0)1-6476 1000, Fax: +33 (0)1-6476 1010
E-mail: contact@smc-france.fr
http://www.smc-france.fr



Netherlands

SMC Pneumatics BV
De Ruyterkade 120, NL-1011 AB Amsterdam
Phone: +31 (0)20-5318888, Fax: +31 (0)20-5318880
E-mail: info@smcpneumatics.nl
http://www.smcpneumatics.nl



Spain

SMC España S.A.
Zuzarzhidea 1A, 41015 Vitoria
Phone: +34 945-184 100, Fax: +34 945-184 124
E-mail: post@smc.smces.es
http://www.smces.es



Belgium

SMC Pneumatics N.V./S.A.
Nijverheidsstraat 20, B-2160 Wommelgem
Phone: +32 (0)3-355-1464, Fax: +32 (0)3-355-1466
E-mail: post@smcpneumatics.be
http://www.smcpneumatics.be



Germany

SMC Pneumatik GmbH
Boschring 13-15, D-63329 Egelsbach
Phone: +49 (0)6103-4020, Fax: +49 (0)6103-402139
E-mail: info@smc-pneumatik.de
http://www.smc-pneumatik.de



Norway

SMC Pneumatics Norway A/S
Vollsveien 13 C, Granfos Næringspark N-1366 Lysaker
Tel: +47 67 12 30 20, Fax: +47 67 12 90 21
E-mail: post@smc-norge.no
http://www.smc-norge.no



Sweden

SMC Pneumatics Sweden AB
Eknagsvägen 29-31 S-14* 71 Luddinge
Phone: +46 (0)8-603 2 00, Fax: +46 (0)8-603 1 2 90
E-mail: post@smcpneumatics.se
http://www.smc.nu



Bulgaria

SMC Industrial Automation Bulgaria EOOD
16 klement Ohridski Blvd., fl.13 BG-1517 Sofia
Phone: +359 2 9744492, Fax: +359 2 9744519
E-mail: office@smc.bg
http://www.smceu.com



Greece

S. Parianosopoulos S.A.
7, Konstantinoupolos Street, GR-11855 Athens
Phone: +30 (0)1-3426076, Fax: +30 (0)1-3455578
E-mail: parianos@hol.gr
http://www.smceu.com



Poland

SMC Industrial Automation Polska Sp.z.o.o.
ul. Konstruktorska 11A, PL-02-673 Warszawa.
Phone: +48 22 548 1085, Fax: +48 22 548 1087
E-mail: office@smc.pl
http://www.smc.pl



Switzerland

SMC Pneumatik AG
Dorfstrasse 1, CH-8484 Weissingen
Phone: +41 (0)52-396-3131, Fax: +41 (0)52-396-3191
E-mail: info@smc.ch
http://www.smc.ch



Croatia

SMC Industrijska automatika d.o.o.
Črnomerec 12, 10000 ZAGREB
Phone: +385 1 377 66 74, Fax: +385 1 377 66 74
E-mail: office@smc.hr
http://www.smceu.com



Hungary

SMC Hungary Ipari Automatizálási Kft.
Budatoki út 107-113, H-1117 Budapest
Phone: +36 1 371 1343, Fax: +36 1 371 1344
E-mail: office@smc-automation.hu
http://www.smc-automation.hu



Portugal

SMC Sucursal Portugal, S.A.
Rua de Engº Ferreira Dias +52, +1 10-246 Porto
Phone: +351 22-610-89-22, Fax: +351 22-610-89-36
E-mail: postpt@smc.smces.es
http://www.smces.es



Turkey

Entek Pneomatik San. ve Tic.Ltd. Sti.
Merpa Tic.Merkezi Kat:11 No:1625, TR-80270 Üsküdarı Istanbul
Phone: +90 (0)212-221-1512, Fax: +90 (0)212-221-1519
E-mail: smc-entek@entek.com.tr
http://www.entek.com.tr



Czech Republic

SMC Industrial Automation CZ s.r.o.
Hudcova 78a, CZ-61200 Brno
Phone: +420 5 414 24611, Fax: +420 5 412 18034
E-mail: office@smc.cz
http://www.smc.cz



Ireland

SMC Pneumatics (Ireland) Ltd.
2002 Citywest Business Campus, Naas Road, Saggart, Co. Dublin
Phone: +353 (0)1-403 9000, Fax: +353 (0)1-464-0500
E-mail: sales@smcpneumatics.ie
http://www.smcpneumatics.ie



Romania

SMC Romania srl
Str. Frunzei 29, Sector 2, Bucharest
Phone: +40 21 32051111, Fax: +40 21 3261489
E-mail: smcromania@smcromania.ro
http://www.smcromania.ro



UK

SMC Pneumatics (UK) Ltd
Vincent Avenue, Crownhill, Milton Keynes, MK8 0AN
Phone: +44 (0)800 1382930 Fax: +44 (0)1908-555064
E-mail: sales@smcpneumatics.co.uk
http://www.smcpneumatics.co.uk



Denmark

SMC Pneumatik A/S
Knudsminde 4B, DK-8300 Odder
Phone: +45 70252900, Fax: +45 70252901
E-mail: smc@smc-pneumatik.dk
http://www.smcdk.com



Italy

SMC Italia S.p.A.
Via Garibaldi 62, I-20061 Carugate, (Milano)
Phone: +39 (0)2-92711, Fax: +39 (0)2-9271363
E-mail: mailbox@smcitalia.it
http://www.smcitalia.it



Russia

SMC Pneumatik LLC.
36/40 Sredny pr. St. Petersburg 199004
Phone: +812 113 3445, Fax: +812 118 3449
E-mail: smcra@peterink.ru
http://www.smc-pneumatik.ru



Estonia

SMC Pneumatics Estonia OÜ
Laki 12-101, 106 21 Tallinn
Phone: +372 (0)6 593540, Fax: +372 (0)6 593541
E-mail: smc@smcpneumatics.ee
http://www.smcpneumatics.ee



Latvia

SMC Pneumatics Latvia SIA
Smerla 1-705, Riga LV-1006, Latvia
Phone: +371 (0)777-94-74, Fax: +371 (0)777-94-75
E-mail: info@smclv.lv
http://www.smclv.lv



Slovakia

SMC Priemyseiná Automatizácia, s.r.o.
Námestie vieraťna Ženku 1, SK-81* 17 Bratislava
Phone: +421 1 444 6725, Fax: +421 1 444 6028
E-mail: office@smc.sk
http://www.smc.sk



Finland

SMC Pneumatics Finland OY
PL72, Tiistiniityntie 4, SF-02031 ESPOO
Phone: +358 (0)9-859 580, Fax: +358 (0)9-8595 8595
E-mail: smcfi@smc.fi
http://www.smc.fi



Lithuania

UAB Ottensten Lietuva
Savanoriu pr. 30, LT-2600 Vilnius, Lithuania
Phone/Fax: +370-2651602



Slovenia

SMC industrijska Avtomatika I.o.o.
Grajski trg 15, SLO-8360 Zuzemberk
Phone: +386 738 35240 Fax: +386 738 85249
E-mail: office@smc-nd-avtom.si
http://www.smc-nd-avtom.si



OTHER SUBSIDIARIES WORLDWIDE:

ARGENTINA, AUSTRALIA, BOLIVIA, BRASIL, CANADA, CHILE,
CHINA, HONG KONG, INDIA, INDONESIA, MALAYSIA, MEXICO,
NEW ZEALAND, PHILIPPINES, SINGAPORE, SOUTH KOREA,
TAIWAN, THAILAND, USA, VENEZUELA

<http://www.smceu.com>
<http://www.smcworld.com>

SMC CORPORATION 1-16-4 Shimbashi, Minato-ku, Tokio 105 JAPAN; Phone:03-3502-2740 Fax:03-3508-2480