FIBOX
Enclosing innovations

CAB CAB PC 304018 G

Sample photo

Order symbol:	CAB PC 304018 G	**EAN**:	6418074020222
Product nbr:	8113351	**El. number**:	
Description:	Cabinet, PC	Finland:	3424116
Remarks:	Latches on the short side	Electric No. Denmark:	8212020427
		Electric No. Italy:	7821035
		Electric No. Sweden:	2539973

Including: Cabinet base, door with PUR gasket, latches, screws for mounting plate/DIN-rail and corner plugs.

Dimensions:	**Length**	**Width**	**Height**
mm:	400	300	180
inch:	15.7	11.8	7.1

Materials:

Material:	Polycarbonate
Base colour:	RAL 7035 -light grey
Cover colour:	RAL 7035 -light grey
Gasket material:	Polyurethane

Temperatures:

Temperature °C (short term):	-40 … 120 °C
Temperature °C (continuous):	-40 … 80 °C
Temperature °F (short term):	-40 … 250 °F
Temperature °F (continuous):	-40 … 175 °F

Accessories:

EKIV 43	Mounting plate

Accessories:

EKIV 43 PL	Mounting plate, Plastic
EKIV 27	DIN-35 Mounting rail
DS35270E1	DIN-35 Mounting rail
EKIV 37	DIN-35 Mounting rail
DS35370E1	DIN-35 Mounting rail
FP A 43	Swing-out door/Front plate
MB 12225 AL	Swing door set
FP 43	Front plate
FP 12x2-43	Front plate
FP 12x3-43	Front plate
DRF 43/44	DIN rail frame set

Rating:

Ingress Protection (EN 60529): IP65
Impact Resistance (EN 62262): IK08
Electrical insulation: Totally insulated
Halogen free (DIN/VDE 0472, Part 815): 1
UV resistance: UL 508
Flammability Rating: UL 746C 5"
Glow Wire Test (IEC 695-2-1) °C: 960

Certificates:

Germanischer Lloyd (GL)
SGS Fimko
Lloyds Register of Shipping (LR)
Gost R

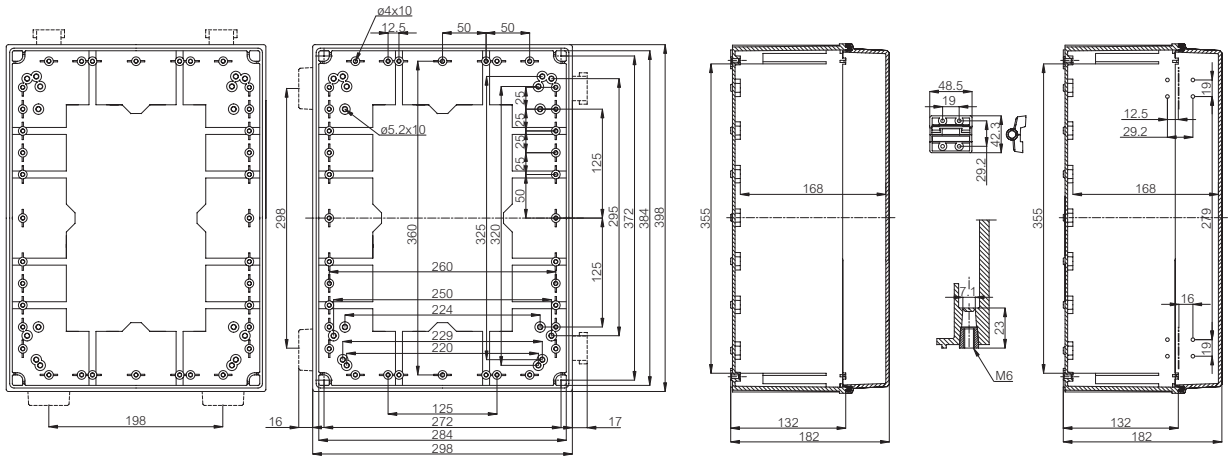

© Fibox Oy, Data subject to change without notice (printed: 18.1.2017)