NO	DESCRIPTION	DATE
1	11.80 ⟶ 11.60	04.20.00'
2	BACKGROUND FORMAT UPDATED	12.31.03'
3	BACKGROUND FORMAT UPDATED	02.10.09'
4	WORKING VOLTAGE ⟶ VOLTAGE RATING DEL PROOF VOLTAGE, SOLDER/ DEL CABLE RETENTION -65° C TO +165° C ⟶ -20° C TO +80° C	09.09.15'

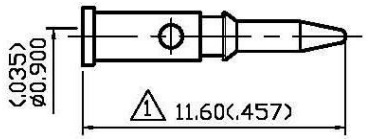

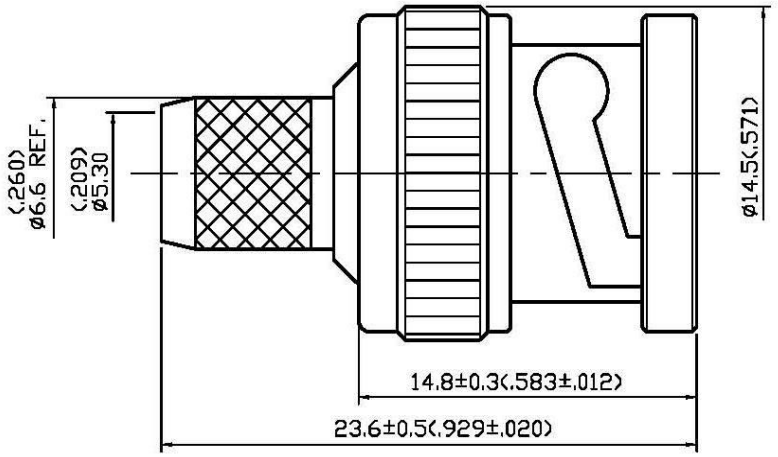

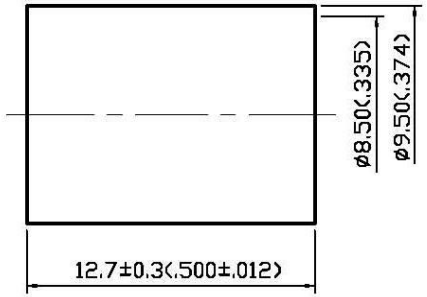



STRIPPING DIMENSION
SCALE 2:1

1.0 ELECTRICAL

1.1 FREQUENCY RANGE: DC-1 GHz
1.2 NOMINAL IMPEDANCE: 75 OHMS
1.3 VOLTAGE RATING: 500 VOLTS MAX. 4

2.0 MATERIALS

2.1 BODIES: BRASS PER JIS-C3604
2.2 CENTER CONTACT: BRASS PER JIS-C3604
2.3 INSULATION: TEFLON PER ASTM D1457 AND ASTM D1710
2.4 CRIMP FERRULE: BRASS PER JIS-C2700

3.0 FINISHES AND OTHERS

3.1 SEE BELOW TABLE FOR DETAILS.

4.0 MECHANICAL

4.1 FOR USE WITH 8281 OR SIMILAR STYLE CABLE
4.2 CABLE ATTACHMENT: OUTER: CRIMP, INNER: SOLDER/CRIMP 4
4.3 CRIMP SIZE REQUIRED: CONTACT: 1.8(.071) HEX. CRIMP TOOL
FERRULE: 8.2(.324) HEX. CRIMP TOOL

5.0 ENVIRONMENTAL

5.1 OPERATING TEMPERATURE RANGE: -20° C TO +80° C 4

NO	DESCRIPTION	MATERIAL	Q'TY	FINISH
9	CENTER CONTACT	BRASS	1	GOLD
8	CRIMP FERRULE	BRASS	1	NICKEL
7	SHELL	ZINC	1	NICKEL
6	INSULATION	TEFLON	1	NONE
5	GASKET	RUBBER	1	RED
4	WASHER	BRASS	1	NICKEL
3	SPRING WASHER	SK-5	1	NICKEL
2	WASHER	BRASS	1	NICKEL
1	BODY	BRASS	1	NICKEL 100μ" MIN.

APPROVED by _____ DATE: _____

DESCRIPTION	BNC STRAIGHT PLUG CRIMP										
製圖	DRAWN	TOLERANCE		品名	13-10-1 T.G.Z 8281	日期	DATE	版次	REV.
	Yoko	.X	±0.2	TITLE	\ROHS COMPLIANT (75Ω)		07.03.96		A-4
檢圖	CHECK	.XX	±0.1	單位	UNIT	DWG.NO.	13-0360		
	Arc	.XXX	±0.05		mm(in)				
認定	APPROVAL	ANGLE	±5°	比例	SCALE				
	jenny				4:1				