

Surge protection device - TT-2-PE/S1- 24DC - 2839538

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://download.phoenixcontact.com>)




Double-level modular terminal block with two-stage surge protection for one two-wire impedance-sensitive signal circuit, separate ground connection, nominal voltage: 24 V DC.

Why buy this product

- Versions with and without disconnect knife
- Protection of a floating double wire in which the introduction of additional resistors for decoupling the protection stages leads to problems
- Multi-stage modular terminal blocks with screw connection technology
- Disconnection of signal circuits by disconnect knife



Key commercial data

Packing unit	10 pc
GTIN	 4 017918 183189
Weight per Piece (excluding packing)	21.84 g
Custom tariff number	85363010
Country of origin	Germany

Technical data

Dimensions

Height	79.6 mm
Width	6.2 mm
Depth	54.6 mm

Ambient conditions

Ambient temperature (operation)	-40 °C ... 80 °C
Degree of protection	IP20

General

Housing material	PA 6.6
Inflammability class according to UL 94	V0
Color	black

Surge protection device - TT-2-PE/S1- 24DC - 2839538

Technical data

General

Standards for air and creepage distances	IEC 60664-1
Mounting type	DIN rail: 35 mm
Type	Double-level terminal block with PE foot – separate PE connection
Number of positions	2
Direction of action	Line-Line & Line-Earth Ground

Protective circuit

IEC test classification	C1
	C2
	C3
	D1
Nominal voltage U_N	24 V DC
Maximum continuous operating voltage U_C	30 V DC
	21 V AC
Maximum continuous voltage U_C (wire-wire)	30 V DC
	21 V AC
Nominal current I_N	10 A (40°C)
Operating effective current I_C at U_C	$\leq 1 \mu A$
Residual current I_{PE}	$\leq 1 \mu A$
Nominal discharge current I_n (8/20) μs (Core-Core)	300 A
Nominal discharge current I_n (8/20) μs (Core-Earth)	5 kA
Total surge current (8/20) μs	10 kA
Nominal pulse current I_{an} (10/1000) μs (Core-Core)	60 A
Nominal pulse current I_{an} (10/1000) μs (Core-Earth)	100 A
Impulse discharge current (10/350) μs , peak value I_{imp}	500 A
Output voltage limitation at 1 kV/ μs (Core-Core) spike	$\leq 45 V$
Output voltage limitation at 1 kV/ μs (Core-Earth) spike	$\leq 700 V$
Voltage protection level U_p (Core-Core)	$\leq 50 V$ (C1 - 500 V / 250 A)
	$\leq 45 V$ (C3 - 10 A)
	$\leq 50 V$ (C3 - 25 A)
Voltage protection level U_p (Core-Earth)	$\leq 900 V$ (C2 - 10 kV / 5 kA)
	$\leq 650 V$ (C1 - 1 kV/500 A)
	$\leq 850 V$ (C3 - 25 A)
	$\leq 850 V$ (D1 - 500 A)
Response time t_A (Core-Core)	$\leq 1 ns$
Response time t_A (Core-Earth)	$\leq 100 ns$
Input attenuation a_E , sym.	typ. 0 dB ($\leq 1 MHz / 50 \Omega$)
	typ. 0 dB ($\leq 200 kHz / 150 \Omega$)
Cut-off frequency f_g (3 dB), sym. in 50 Ohm system	typ. 6 MHz
Cut-off frequency f_g (3 dB), sym. in 150 Ohm system	typ. 2.2 MHz
Capacity (Core-Core)	4 nF

Surge protection device - TT-2-PE/S1- 24DC - 2839538

Technical data

Protective circuit

Max. required back-up fuse	10 A (T/IEC 60127-2/3)
Surge carrying capacity in acc. with IEC 61643-21 (Core-Core)	C1 (500 V / 250 A)
	C3 (25 A)
Surge carrying capacity in acc. with IEC 61643-21 (Core-Earth)	C1 (1 kV / 500 A)
	C2 (10 kV/5 kA)
	C3 (25 A)
	D1 (500 A)
Alternating current carrying capacity in acc. with IEC 61643-21 (Core-Core)	1A - 1s
Alternating current carrying capacity in acc. with IEC 61643-21 (Core-Earth)	1 A - 1 s

Connection data

Connection method	Screw connection
Connection type IN	Screw terminal blocks
Connection type OUT	Screw terminal blocks
Screw thread	M3
Tightening torque	0.8 Nm
Stripping length	8 mm
Conductor cross section stranded min.	0.2 mm ²
Conductor cross section stranded max.	2.5 mm ²
Conductor cross section solid min.	0.2 mm ²
Conductor cross section solid max.	4 mm ²
Conductor cross section AWG/kcmil min.	24
Conductor cross section AWG/kcmil max	14

Standards and Regulations

Standards/regulations	IEC 61643-21
	EN 61643-21

Classifications

eCl@ss

eCl@ss 4.0	27140201
eCl@ss 4.1	27130801
eCl@ss 5.0	27130801
eCl@ss 5.1	27130801
eCl@ss 6.0	27130807
eCl@ss 7.0	27130807
eCl@ss 8.0	27130807

ETIM

ETIM 2.0	EC000943
----------	----------

Surge protection device - TT-2-PE/S1- 24DC - 2839538

Classifications

ETIM

ETIM 3.0	EC000943
ETIM 4.0	EC000943
ETIM 5.0	EC000943

UNSPSC

UNSPSC 6.01	30212010
UNSPSC 7.0901	39121610
UNSPSC 11	39121610
UNSPSC 12.01	39121610
UNSPSC 13.2	39121620

Approvals

Approvals

Approvals

GOST / GL / UL Listed

Ex Approvals

Approvals submitted

Approval details

GOST

GL

UL Listed

Accessories

Accessories

End cover

Surge protection device - TT-2-PE/S1- 24DC - 2839538

Accessories

End cover - D-DEK 1,5 BK - 2838995



Cover for setting the end of a TERMITRAB TT-2-PE... and TT-2/2 row of terminal blocks, color: black

Labeled terminal marker

Zack Marker strip, flat - ZBF 6,LGS:FORTL.ZAHLEN - 0808749



Zack Marker strip, flat, Strip, white, labeled, Printed horizontally: Consecutive numbers 1 - 10, 11 - 20, etc. up to 91 - 100, Mounting type: Snap into flat marker groove, For terminal block width: 6.2 mm, Lettering field: 5.15 x 6.15 mm

Marker pen

Marker pen - B-STIFT - 1051993



Marker pen, for manual labeling of unprinted Zack strips, smear-proof and waterproof, line thickness 0.5 mm

Terminal marking

Zack Marker strip, flat - ZBF 6:UNBEDRUCKT - 0808710



Zack Marker strip, flat, Strip, white, Unlabeled, Can be labeled with: Plotter, Mounting type: Snap into flat marker groove, For terminal block width: 6.2 mm, Lettering field: 5.15 x 6.15 mm

Zack Marker strip, flat - ZBF 6/WH-100:UNBEDRUCKT - 0808736



Zack Marker strip, flat, Strip, white, Unlabeled, Can be labeled with: Plotter, Mounting type: Snap into flat marker groove, For terminal block width: 6.2 mm, Lettering field: 5.15 x 6.15 mm

Additional products

Surge protection device - TT-2-PE/S1- 24DC - 2839538

Accessories

End cover - D-DEK 1,5 BK - 2838995



Cover for setting the end of a TERMITRAB TT-2-PE... and TT-2/2 row of terminal blocks, color: black

Shield connection - SSA 3-6 - 2839295



shield fast connections for conductor diameter 3 - 6 mm. Potential connection cable: 200 mm, black


Shield connection - SSA 5-10 - 2839512




Shield fast connection for conductor diameters 5 - 10 mm. Potential connection cable: 200 mm, black

Drawings

Dimensioned drawing

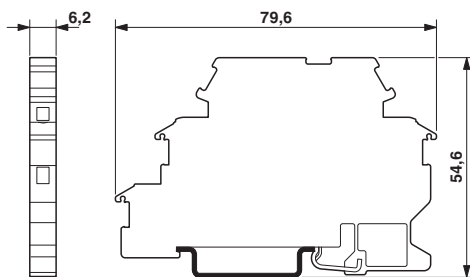

Circuit diagram

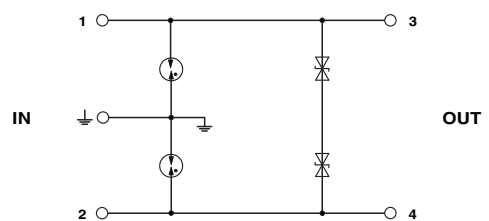

Schematic diagram

