

## Lightning arrester type 1 - FLT-PLUS CTRL-1.5/I - 2800120

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://download.phoenixcontact.com>)

Type 1 / Class I (lightning current arrester) with arc chopping spark gap and ignition electronics, quenching plates for high mains follow-through current quenching capacity, 1-channel. Protection level: 1.5 kV. Housing width: 35 mm (2 Div.)




The illustration shows version FLT-PLUS CTRL-0,9

### Why buy this product

- High discharge capacity
- Good follow current quenching capacity with higher rated voltage
- Triggered
- Single-channel
- Direct parallel connection with type 2 arresters supported



### Key commercial data

Packing unit	1 pc
GTIN	 4 046356 480055
Weight per Piece (excluding packing)	563.1 g
Custom tariff number	85363010
Country of origin	Germany

### Technical data

#### Dimensions

Height	150 mm
Width	35.5 mm
Depth	80.5 mm
Horizontal pitch	2 Div.

#### Ambient conditions

Degree of protection	IP20
Ambient temperature (operation)	-40 °C ... 85 °C
Permissible humidity (operation)	≤ 95 %

# Lightning arrester type 1 - FLT-PLUS CTRL-1.5/I - 2800120

## Technical data

### General

IEC power supply system	TT
	TN-C
	TN-S
Housing material	PA-GF
Inflammability class according to UL 94	V0
Spark gap insulation	PA 6.6 GF
	POM
Color	black
Standards for air and creepage distances	EN 60664-1
	EN61643-11
Mounting type	DIN rail: 35 mm
Type	Rail-mountable module, one-piece
Number of positions	1
Surge protection fault message	Optical
Direction of action	1L-N/PE

### Protective circuit

IEC test classification	I
	T1
EN type	T1
Nominal voltage $U_N$	230 V AC (400 V AC)
Maximum continuous operating voltage $U_C$	350 V AC
Maximum continuous operating voltage $U_C$ (L-N)	350 V AC
Maximum continuous operating voltage $U_C$ (L-PEN)	350 V AC
$U_T$ (TOV-proof)	350 V (5 sec.)
Nominal frequency $f_N$	50 Hz
	60 Hz
Residual current $I_{PE}$	$\leq 3$ mA
Standby power consumption $P_C$	$\leq 1.05$ VA
Max. discharge current $I_{max}$ (8/20) $\mu$ s	50 kA
Nominal discharge current $I_n$ (8/20) $\mu$ s	50 kA
Nominal discharge current $I_n$ (8/20) $\mu$ s (L-N)	50 kA
Nominal discharge current $I_n$ (8/20) $\mu$ s (L-PEN)	50 kA
Impulse discharge current (10/350) $\mu$ s, charge	25 As
Impulse discharge current (10/350) $\mu$ s, specific energy	625.00 kJ/ $\Omega$
Impulse discharge current (10/350) $\mu$ s, peak value $I_{imp}$	50 kA
Front of wave sparkover voltage at 6 kV (1.2/50) $\mu$ s	$\leq 1.5$ kV
Voltage protection level $U_p$	$\leq 1.5$ kV
Voltage protection level $U_p$ (L-N)	$\leq 1.5$ kV
Voltage protection level $U_p$ (L-PEN)	$\leq 1.5$ kV

# Lightning arrester type 1 - FLT-PLUS CTRL-1.5/I - 2800120

## Technical data

### Protective circuit

Response time	≤ 100 ns
Response time (L-N)	≤ 100 ns
Response time (L-PEN)	≤ 100 ns
Max. required backup fuse with branch wiring	500 A (NH-gL)
Short-circuit resistance I <sub>p</sub> with max. backup fuse (effective)	50 kA
Follow current quenching capacity I <sub>f</sub>	50 kA

### Connection, protective circuit

Connection method	Screw connection
Connection type IN	Biconnect screw terminal block
Connection type OUT	Biconnect screw terminal block
Connection method	Biconnect terminal block
Screw thread	M6
Tightening torque	8 Nm
Stripping length	19 mm
Conductor cross section stranded min.	16 mm <sup>2</sup>
Conductor cross section stranded max.	35 mm <sup>2</sup>
Conductor cross section solid min.	10 mm <sup>2</sup>
Conductor cross section solid max.	50 mm <sup>2</sup>
Conductor cross section AWG/kcmil min.	6
Conductor cross section AWG/kcmil max	1

### Standards and Regulations

Standards/regulations	IEC 61643-1 2005
	DIN EN 61643-11 2002
	DIN EN 61643-11/A11 2007

## Classifications

### eCl@ss

eCl@ss 4.0	27140201
eCl@ss 4.1	27140201
eCl@ss 5.0	27140201
eCl@ss 5.1	27140201
eCl@ss 6.0	27140201
eCl@ss 7.0	27140201
eCl@ss 8.0	27140201

### ETIM

ETIM 2.0	EC000381
ETIM 3.0	EC000381
ETIM 4.0	EC000381

# Lightning arrester type 1 - FLT-PLUS CTRL-1.5/I - 2800120

## Classifications

### ETIM

ETIM 5.0	EC000381
----------	----------

### UNSPSC

UNSPSC 6.01	30212010
UNSPSC 7.0901	39121610
UNSPSC 11	39121610
UNSPSC 12.01	39121610
UNSPSC 13.2	39121620

## Approvals

### Approvals

---

#### Approvals

UL Recognized / cUL Recognized / GOST / cULus Recognized

---

#### Ex Approvals

---

#### Approvals submitted

---

## Approval details

UL Recognized

cUL Recognized

GOST

cULus Recognized

## Accessories

### Accessories

## Lightning arrester type 1 - FLT-PLUS CTRL-1.5/I - 2800120

### Accessories

#### Bridge

Wiring bridge - MPB 18/1-57 - 2809238



Wiring bridge for modules with connecting pitch 17.5 mm, 1-phase, 57-pos.

---

Wiring bridge - MPB 18/1-12 - 2748593



Wiring bridge for modules with connecting pitch 17.5 mm, 1-phase, 12-pos.

---

Wiring bridge - MPB 18/1- 9 - 2748580



Wiring bridge for modules with connecting pitch 17.5 mm, 1-phase, 9-pos.

---

Wiring bridge - MPB 18/1- 8 - 2748577



Wiring bridge for modules with connecting pitch 17.5 mm, 1-phase, 8-pos.

---

Wiring bridge - MPB 18/1- 6 - 2748564



Wiring bridge for modules with connecting pitch 17.5 mm, 1-phase, 6-pos.

---

# Lightning arrester type 1 - FLT-PLUS CTRL-1.5/I - 2800120

## Accessories

Wiring bridge - MPB 18/1- 4 - 2809225



Wiring bridge for modules with connecting pitch 17.5 mm, 1-phase, 4-pos.

---

Wiring bridge - MPB 18/1- 3 - 2809212



Wiring bridge for modules with connecting pitch 17.5 mm, 1-phase, 3-pos.

---

Wiring bridge - MPB 18/1- 2 - 2809209



Wiring bridge for modules with connecting pitch 17.5 mm, 1-phase, 2-pos.

---

## Device marking

Zack marker strip - ZBN 18:UNBEDRUCKT - 2809128



Zack marker strip, Strip, white, Unlabeled, Can be labeled with: Plotter, Mounting type: Snap into tall marker groove, For terminal block width: 18 mm, Lettering field: 18 x 5 mm

---

## End block

End clamp - CLIPFIX 35 - 3022218



Quick mounting end clamp for NS 35/7,5 DIN rail or NS 35/15 DIN rail, with marking option, width: 9.5 mm, color: gray

---

## Labeled device marker

# Lightning arrester type 1 - FLT-PLUS CTRL-1.5/I - 2800120

## Accessories

Marker for terminal blocks - ZBN 18,LGS:ERDE - 2749589



Marker for terminal blocks, Strip, white, labeled, Horizontal: Grounding symbol, Mounting type: Snap into tall marker groove, For terminal block width: 18 mm, Lettering field: 18 x 5 mm

Marker for terminal blocks - ZBN 18,LGS:L1-N,ERDE - 2749576



Marker for terminal blocks, Strip, white, labeled, Horizontal: L1, L2, L3, N, GND, Mounting type: Snap into tall marker groove, For terminal block width: 18 mm, Lettering field: 18 x 5 mm

Marker pen


Marker pen - B-STIFT - 1051993



Marker pen, for manual labeling of unprinted Zack strips, smear-proof and waterproof, line thickness 0.5 mm

## Drawings

Dimensioned drawing

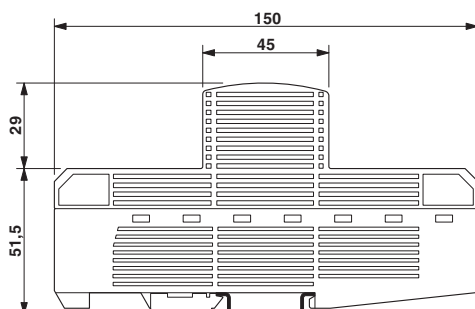

Circuit diagram

