

Lamp Current (A): 4.5A
 Ignitor Voltage (Min.): 3.8KV
 Luminaire Rating: Open/Enclosed
 Burning Position: Universal

HPST.400W/E40/XHO
Product Number: 00172
Lamp Type: HIGH PRESSURE SODIUM

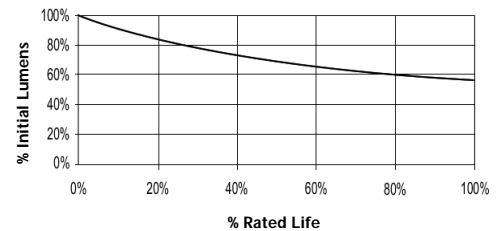
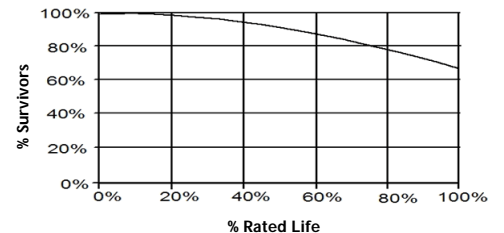
Performance Data

Light Output (Lumens @ 100 hours)	56700
Lamp Lumens Per Watt	137
Rated Life (Hrs. @ 10 Hr. /Start)	28000
Correlated Colour Temperature (K)	2000
Chromaticity (CIE - X Y)	525, 425
Colour Rendering Index (CRI) or (Ra)	25
Typical Warm Up Time (Minutes)	3
Typical Hot Restart Time (Minutes)	1
Burning Position	Universal



Physical Data / Requirements

Base Designation	E40
Bulb Designation	-
Bulb Diameter (mm)	46
Max. Overall Length (mm)	278
Light Centre Length (mm)	175
Effective Arc Length (mm)	85.3
Max. Base Temperature (°C)	250
Max. Bulb Temperature (°C)	400
Luminaire Type	Open/Enclosed
Socket Pulse Rating (KV)	5
Mercury Content (mg)	

Lumen Maintenance

Lamp Mortality


Lamp Electrical Data / Requirements

IEC Standard	-
Lamp Wattage (W)	400
Lamp Operating Voltage (V)	100
Lamp Operating Current (Amps)	4.5
Min. Open Circuit Voltage (RMS)	198
Min. Starting Pulse (Peak V)	3800-4500
Min. Pulse Width at 2700V (microseconds)	1
Min. Pulse Rate Per 1/2 cycle	1
Pulse Position (Electrical Degrees)	60-90, 240-270

Revision: 09.06.2011

Notes:

This Product Specification contains data about typical performance at nominal power. Actual values may depend on ballast and applications. Complies with (CE), Low Voltage (CE), WEEE and RoHS Directives.