

### TO-92S



### Pin Definition:

1. V<sub>CC</sub>
2. GND
3. Output

### SOT-23



### Pin Definition:

1. V<sub>CC</sub>
2. Output
3. GND

## Description

TSH188 Hall-effect sensor is a temperature stable, stress-resistant sensor. Superior high-temperature performance is made possible through a dynamic offset cancellation that utilizes chopper-stabilization. This method reduces the offset voltage normally caused by device over molding, temperature dependencies, and thermal stress. TSH188 includes the following on a single silicon chip: voltage regulator, Hall voltage generator, small-signal amplifier, chopper stabilization, Schmitt trigger. Advanced DMOS wafer fabrication processing is used to take advantage of low-voltage requirements, component matching, very low input-offset errors, and small component geometries. This device requires the presence of both south and north polarity magnetic fields for operation. In the presence of a south polarity field of sufficient strength, the device output sensor on, and only switches off when a north polarity field of sufficient strength is present

## Features

- 100% tested at 125°C
- Temperature compensation function
- Chopper stabilized amplifier stage.
- Optimized for BLDC motor applications.
- Reliable and low shifting on high Temp condition.

## Ordering Information

| Part No.     | Package | Packing          |
|--------------|---------|------------------|
| TSH188CT B0G | TO-92S  | 1Kpcs / Bulk Bag |
| TSH188CT A3G | TO-92S  | 2Kpcs / Ammo     |
| TSH188CX RFG | SOT-23  | 3Kpcs / 7" Reel  |

**Note:** "G" denote for Halogen Free Product

## Application


- High temperature Fan motor
- 3 phase BLDC motor application
- Speed sensing, Position sensing, Current sensing
- Revolution counting
- Solid-State Switch
- Linear/Angular Position Detection

## Absolute Maximum Rating (T<sub>a</sub> = 25°C unless otherwise noted)


| Characteristics                          |        | Limit               | Value       | Unit  |
|------------------------------------------|--------|---------------------|-------------|-------|
| Supply voltage                           |        | V <sub>CC</sub>     | 28          | V     |
| Output Voltage                           |        | V <sub>OUT</sub>    | 28          | V     |
| Reverse voltage                          |        | V <sub>CC/OUT</sub> | -28         | V     |
| Magnetic flux density                    |        |                     | Unlimited   | Gauss |
| Output current                           |        | I <sub>OUT</sub>    | 50          | mA    |
| Operating Temperature Range              |        | T <sub>OPR</sub>    | -40 to +125 | °C    |
| Storage temperature range                |        | T <sub>STG</sub>    | -55 to +150 | °C    |
| Maximum Junction Temp                    |        | T <sub>J</sub>      | 150         | °C    |
| Thermal Resistance - Junction to Ambient | TO-92S | θ <sub>JA</sub>     | 206         | °C/W  |
|                                          | SOT-23 |                     | 543         |       |
| Thermal Resistance - Junction to Case    | TO-92S | θ <sub>JC</sub>     | 148         | °C/W  |
|                                          | SOT-23 |                     | 410         |       |
| Package Power Dissipation                | TO-92S | P <sub>D</sub>      | 606         | mW    |
|                                          | SOT-23 |                     | 230         |       |

**Note:** Do not apply reverse voltage to V<sub>CC</sub> and V<sub>OUT</sub> Pin, It may be caused for Miss function or damaged device.

### Block Diagram

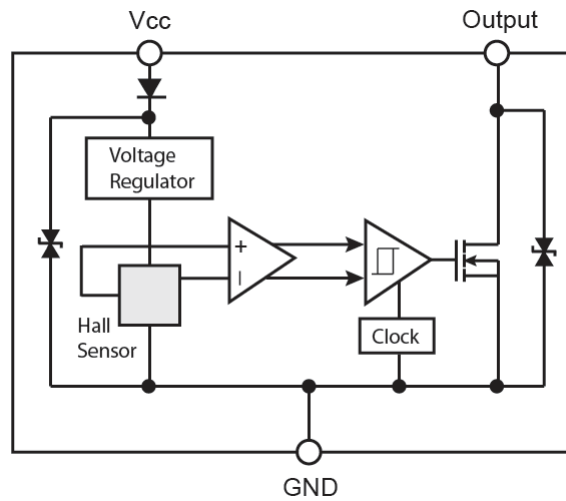

### Typical Application Circuit

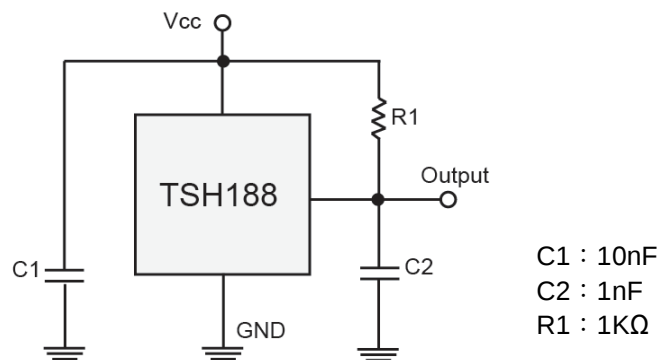

### Electrical Specifications (DC Operating Parameters : $T_A = +25^\circ\text{C}$ , $V_{CC} = 12\text{V}$ )


| Parameters                            | Test Conditions                                 | Min    | Typ  | Max    | Units |
|---------------------------------------|-------------------------------------------------|--------|------|--------|-------|
| Supply Voltage                        | Operating                                       | 2.5    | --   | 24     | V     |
| Supply Current                        | $B < B_{OP}$                                    | --     | --   | 5      | mA    |
| Output Saturation Voltage             | $I_{OUT} = 20\text{mA}$ , $B > B_{OP}$          | --     | --   | 400    | mV    |
| Output Leakage Current                | $I_{OFF}$ $B < B_{RP}$ , $V_{OUT} = 12\text{V}$ | --     | --   | 10     | uA    |
| Internal Oscillator Chopper Frequency |                                                 | --     | 69   | --     | kHz   |
| Output Rise Time                      | $R_L = 1.1\text{K}\Omega$ , $C_L = 20\text{pF}$ | --     | 0.04 | 0.45   | uS    |
| Output Fall Time                      | $R_L = 820\Omega$ ; $C_L = 20\text{pF}$         | --     | 0.18 | 0.45   | uS    |
| ESD                                   | HBM                                             | 4      | --   | --     | KV    |
| Operate Point                         |                                                 | 5(-25) | --   | 25(-5) | Gauss |
| Release Point                         |                                                 | -25(5) | --   | -5(25) | Gauss |
| Hysteresis                            |                                                 | --     | 30   | --     | Gauss |

**Note:** 1G (Gauss) = 0.1mT (millitesta)


### Output Behavior versus Magnetic Pole

DC Operating Parameters:  $T_A = -40$  to  $125^\circ\text{C}$ ,  $V_{CC} = 2.5\sim 24\text{V}$


| Parameter  | Test condition | OUT (TO-92S) | OUT (SOT-23) |
|------------|----------------|--------------|--------------|
| North pole | $B > B_{OP}$   | Open(Hi)     | Low          |
| South pole | $B < B_{RP}$   | Low          | Open(Hi)     |

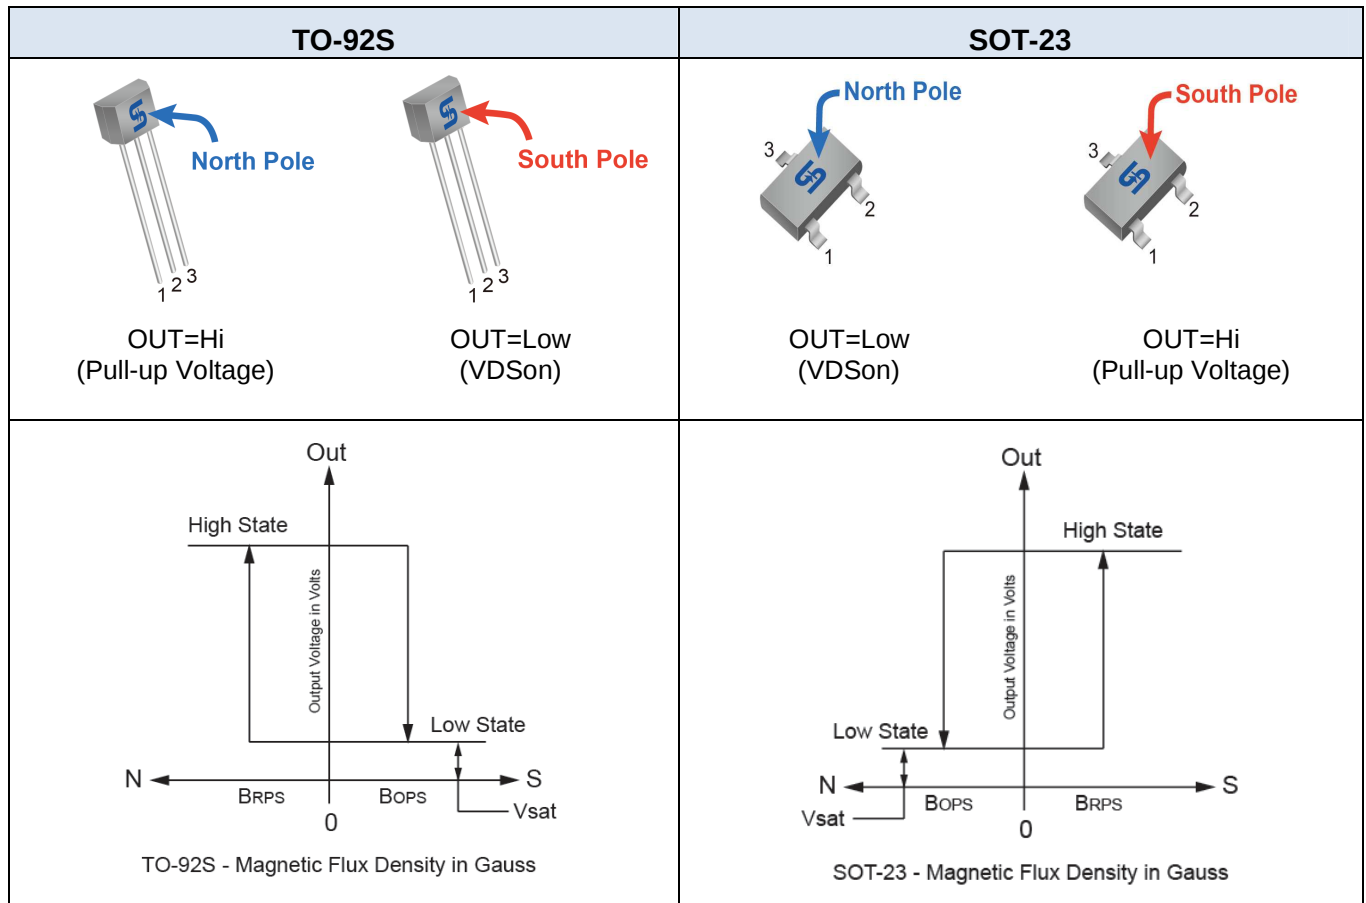


**Characteristic Performance**

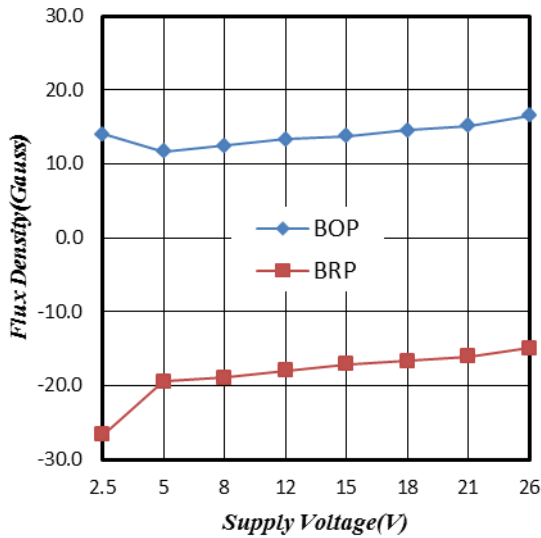


**Figure 1. Supply Voltage vs. Flux Density**

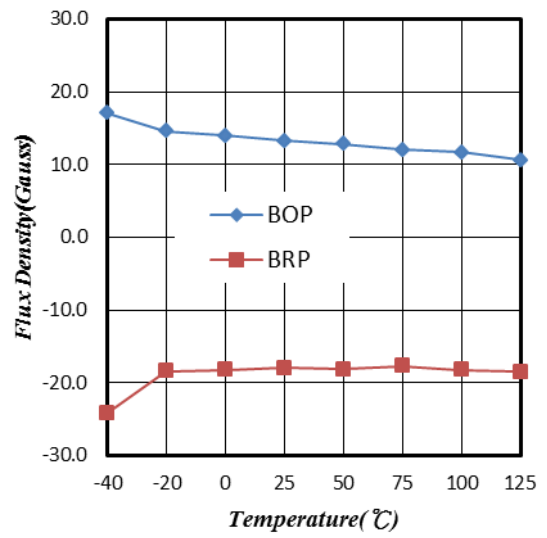


**Figure 2. Temperature vs. Flux Density**

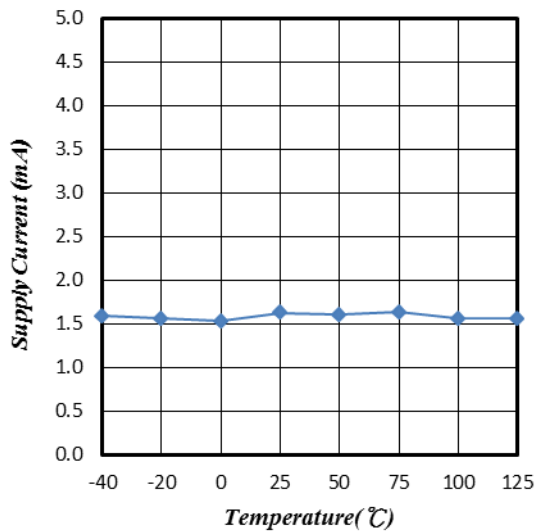


**Figure 3. Supply Current vs. Temperature**

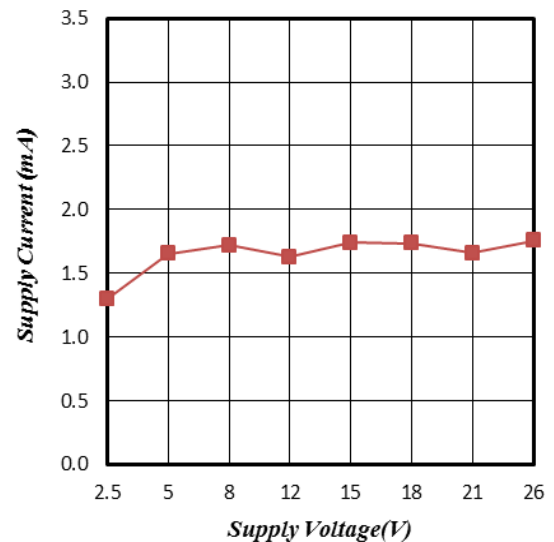

**Figure 4. Supply Current vs. Supply Voltage**

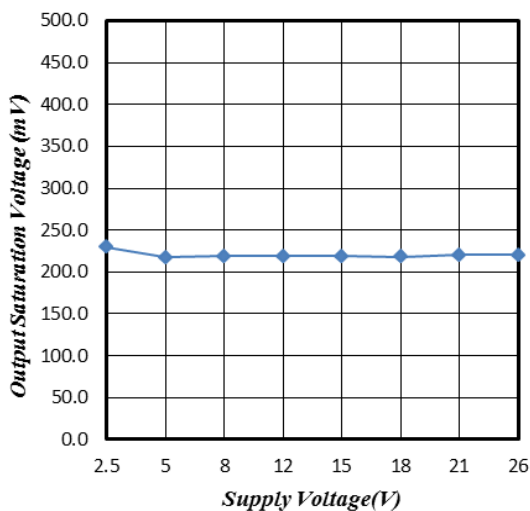


**Figure 5. Supply Voltage vs. Saturation Voltage**

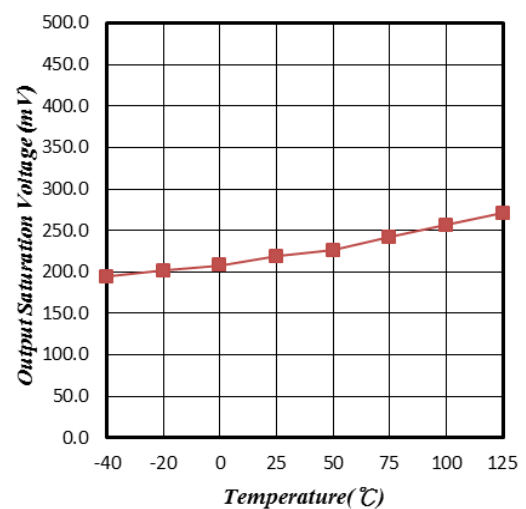


**Figure 6. Saturation Voltage vs. Temperature**


**Characteristic Performance**

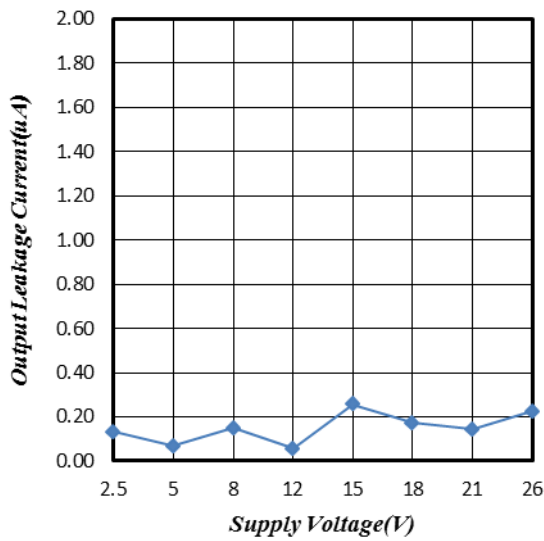


**Figure 7. Supply Voltage vs. Leakage Current**

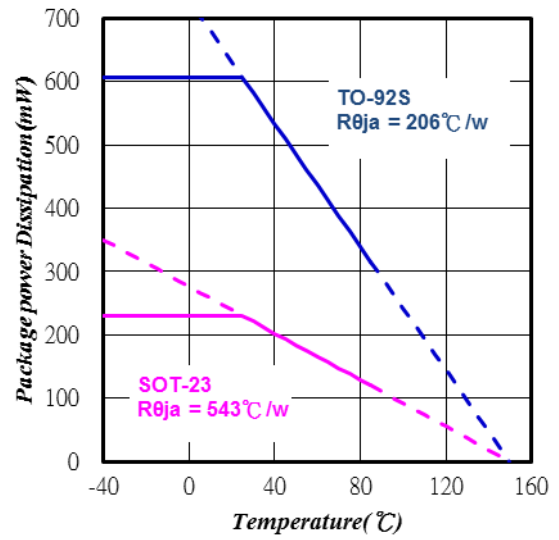

**Figure 8. Temperature vs. Power Dissipation**

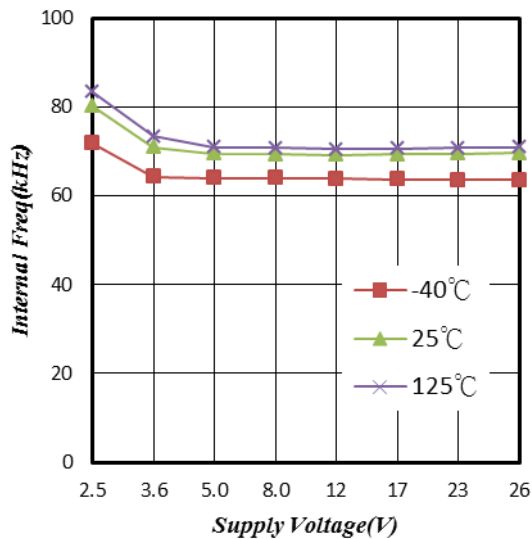


**Figure 9. Supply Voltage vs. Internal Frequency**

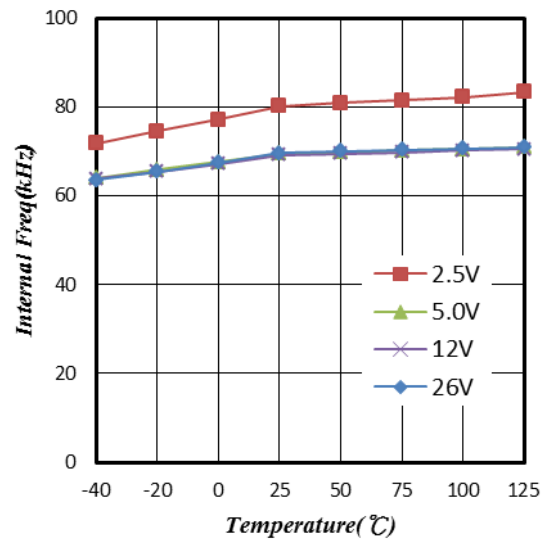


**Figure 10. Temperature vs. Internal Frequency**

## TO-92S Mechanical Drawing

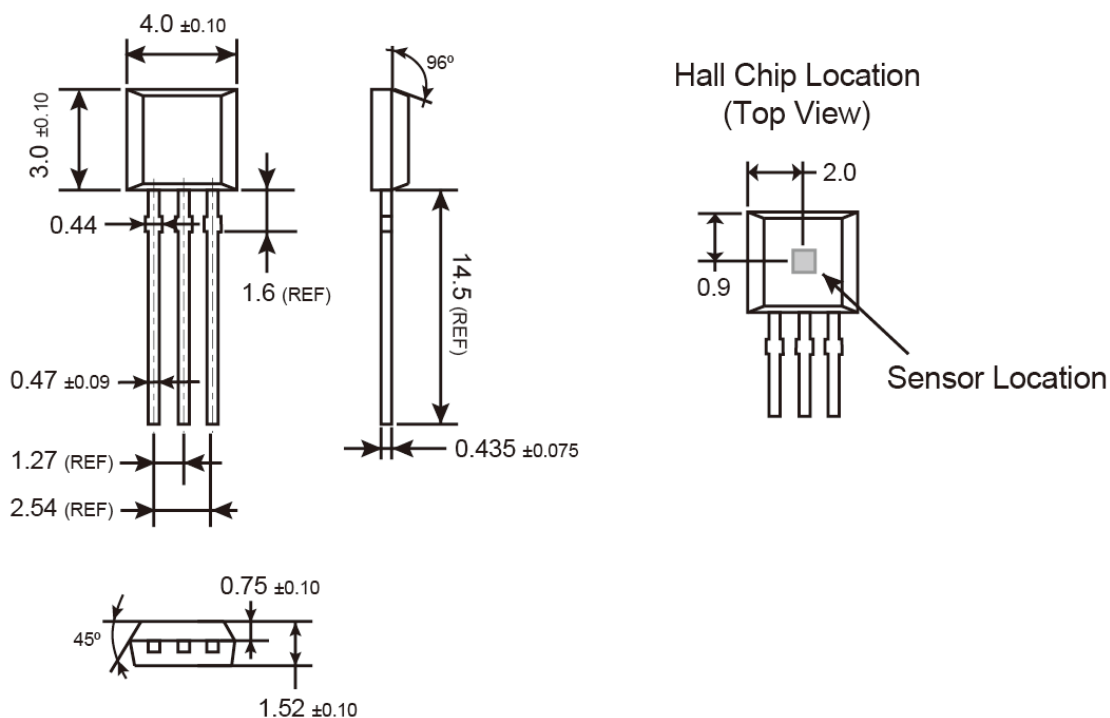


Unit: Millimeters

## Marking Diagram




**188** = Device Code  
**Y** = Year Code  
**WW** = Week Code (01~52)

## SOT-23 Mechanical Drawing

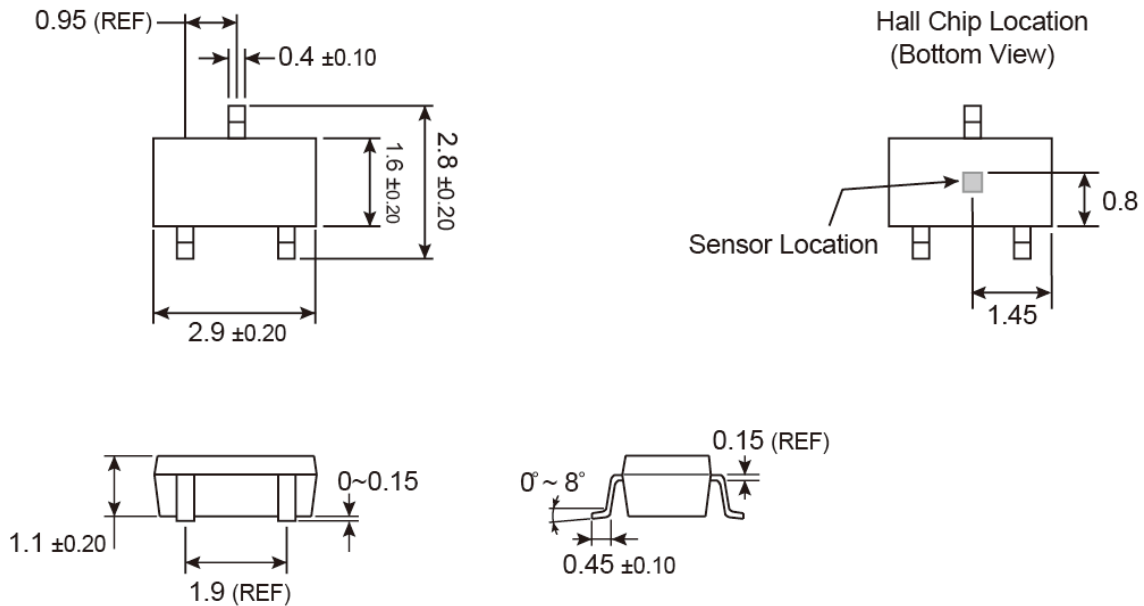

Unit: Millimeters

## Marking Diagram



**188** = Device Code

**WW** = Week Code Table

|      |    |    |    |    |    |    |    |    |    |    |    |    |    |
|------|----|----|----|----|----|----|----|----|----|----|----|----|----|
| week | 1  | 2  | 3  | 4  | 5  | 6  | 7  | 8  | 9  | 10 | 11 | 12 | 13 |
| code | OA | OB | OC | OD | OE | OF | OG | OH | OI | OJ | OK | OL | OM |
| week | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 |
| code | ON | OO | OP | OQ | OR | OS | OT | OU | OV | OW | OX | OY | OZ |
| week | 27 | 28 | 29 | 30 | 31 | 32 | 33 | 34 | 35 | 36 | 37 | 38 | 39 |
| code | PA | PB | PC | PD | PE | PF | PG | PH | PI | PJ | PK | PL | PM |
| week | 40 | 41 | 42 | 43 | 44 | 45 | 46 | 47 | 48 | 49 | 50 | 51 | 52 |
| code | PN | PO | PP | PQ | PR | PS | PT | PU | PV | PW | PX | PY | PZ |

### **Notice**

Specifications of the products displayed herein are subject to change without notice. TSC or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies.

Information contained herein is intended to provide a product description only. No license, express or implied, to any intellectual property rights is granted by this document. Except as provided in TSC's terms and conditions of sale for such products, TSC assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of TSC products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify TSC for any damages resulting from such improper use or sale.