


### Features

- ◆ Highest power density in SIP package
- ◆ Wide 2:1 input voltage range
- ◆ Ultra-compact SIP-8 package
- ◆ Smallest footprint 9W converter
- ◆ Full SMD design
- ◆ Temperature range  $-40^{\circ}$  to  $+85^{\circ}\text{C}$
- ◆ High efficiency up to 89%
- ◆ Indefinite short-circuit protection
- ◆ I/O isolation 1500 VDC
- ◆ Remote On/Off control
- ◆ Fully RoHS compliant
- ◆ 3-year product warranty

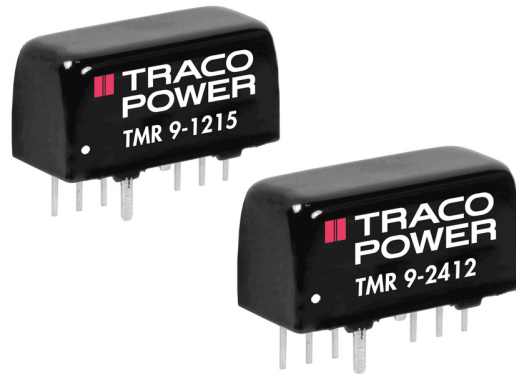

The TMR-9 series is a new family of isolated 9W dc-dc converter modules with regulated output, featuring wide 2:1 input voltage ranges. The product comes in a ultra-compact SIP-8 metal package with a small footprint occupying only 2.0 cm<sup>2</sup> (0.3 square in.) of board space.

An excellent efficiency allows  $-40^{\circ}$  to  $+60^{\circ}\text{C}$  operation temperatures without derating. Further features include remote On/Off control and continuous short circuit protection. The very compact dimensions of these converters make them an ideal solution for many space critical applications in communication equipment, instrumentation and industrial electronics.

### Models

Order code	Input voltage range	Output voltage	Output current max.	Efficiency typ.
TMR 9-1210	9 – 18 VDC (12 VDC nominal)	3.3 VDC	2000 mA	81 %
TMR 9-1211		5 VDC	1600 mA	85 %
TMR 9-1219		9 VDC	1000 mA	86 %
TMR 9-1212		12 VDC	750 mA	88 %
TMR 9-1213		15 VDC	600 mA	89 %
TMR 9-1215		24 VDC	375 mA	89 %
TMR 9-1221		$\pm 5$ VDC	$\pm 800$ mA	85 %
TMR 9-1222		$\pm 12$ VDC	$\pm 375$ mA	88 %
TMR 9-1223		$\pm 15$ VDC	$\pm 300$ mA	88 %
TMR 9-2410		18 – 36 VDC (24 VDC nominal)	3.3 VDC	2000 mA
TMR 9-2411	5 VDC		1600 mA	85 %
TMR 9-2419	9 VDC		1000 mA	87 %
TMR 9-2412	12 VDC		750 mA	89 %
TMR 9-2413	15 VDC		600 mA	89 %
TMR 9-2415	24 VDC		375 mA	89 %
TMR 9-2421	$\pm 5$ VDC		$\pm 800$ mA	86 %
TMR 9-2422	$\pm 12$ VDC		$\pm 375$ mA	88 %
TMR 9-2423	$\pm 15$ VDC		$\pm 300$ mA	87 %
TMR 9-4810	36 – 75 VDC (48 VDC nominal)		3.3 VDC	2000 mA
TMR 9-4811		5 VDC	1600 mA	85 %
TMR 9-4819		9 VDC	1000 mA	87 %
TMR 9-4812		12 VDC	750 mA	89 %
TMR 9-4813		15 VDC	600 mA	89 %
TMR 9-4815		24 VDC	375 mA	88 %
TMR 9-4821		$\pm 5$ VDC	$\pm 800$ mA	86 %
TMR 9-4822		$\pm 12$ VDC	$\pm 375$ mA	87 %
TMR 9-4823		$\pm 15$ VDC	$\pm 300$ mA	87 %

### Input Specifications

Input current at no load (nominal input voltage)	12 V models: 10 mA typ. 24 V models: 9 mA typ. 48 V models: 5 mA typ.
Surge voltage (1000 msec. max.)	12 V models: 36 V max. 24 V models: 50 V max. 48 V models: 100 V max.
Conducted noise	EN 55022 class A internal filter
ESD (electrostatic discharge)	EN 61000-4-2, air $\pm 8$ kV, contact $\pm 6$ kV, perf. criteria A
Radiated immunity	EN 61000-4-3, 20 V/m, perf. criteria A
Fast transient / surge (with external input capacitor)	EN 61000-4-4, $\pm 2$ kV, perf. criteria A EN 61000-4-5, $\pm 2$ kV perf. criteria A
<ul style="list-style-type: none"> <li>- external input capacitor</li> <li>- external TVS</li> </ul>	all models: Nippon chemi-con KY 220 $\mu$ F, 100 V 12 & 24 V models: SMDJ70A, 70 V, 3000 W peak pulse power 48 V models: SMDJ120A, 120 V, 3000 W peak pulse power
Conducted immunity	EN 61000-4-6, 10 Vrms, perf. criteria A

### Output Specifications

Voltage set accuracy	$\pm 1$ % max
Regulation	<ul style="list-style-type: none"> <li>- Input variation <math>V_{in}</math> min. to <math>V_{in}</math> max. 0.2 % max.</li> <li>- Load variation 0 – 100%               <ul style="list-style-type: none"> <li>single output models: 1.0 % max.</li> <li>dual output models: 1.0 % max. balanced load</li> </ul> </li> <li>- Load cross regulation 25/100% 5.0 % max. (dual output models)</li> </ul>
Minimum load	not required
Ripple and noise (20 MHz Bandwidth)	3.3, 5 & 9 VDC models: 50 mVpk-pk typ. with cap. 1 $\mu$ F/50V X7R MLCC 12, 15 & 24 VDC models: 75 mVpk-pk typ. with cap. 1 $\mu$ F/50V X7R MLCC
Transient response setting time (25% load step change)	250 $\mu$ s typ.
Short circuit protection	indefinite, automatic recovery
Over load protection	180 % of nom. I <sub>out</sub> typ. (hiccup)
Start up time (constant resistive load)	<ul style="list-style-type: none"> <li>- Power On 50 ms typ.</li> <li>- Remote On 50 ms typ.</li> </ul>
Capacitive load	3.3 VDC / 5 VDC output models: 2600 $\mu$ F max. / 1300 $\mu$ F max. 9 VDC output models: 800 $\mu$ F max. 12 VDC & 15 VDC output models: 560 $\mu$ F max. 24 VDC output models: 200 $\mu$ F max. $\pm 5$ VDC / $\pm 12$ VDC output models: $\pm 800$ $\mu$ F max. / $\pm 390$ $\mu$ F max. $\pm 15$ VDC output models: $\pm 200$ $\mu$ F max.

### General Specifications

Temperature ranges	<ul style="list-style-type: none"> <li>- Operating -40°C to +85°C</li> <li>- Case temperature +100°C max.</li> <li>- Storage -55°C to +125°C</li> </ul>
Load derating	3.3 VDC model: 2.0 %/K above 50°C other models: 2.5 %/K above 60°C
Thermal shock, mechanical shock & vibration	EN 61373, MIL-STD-810F
<ul style="list-style-type: none"> <li>- Test conditions</li> </ul>	<a href="http://www.tracopower.com/products/mil810.pdf">www.tracopower.com/products/mil810.pdf</a>
Humidity (non condensing)	95 % rel. H max.
Temperature coefficient	$\pm 0.02$ %/K

All specifications valid at nominal input voltage, full load and +25°C after warm-up time unless otherwise stated.


**General Specifications**

Reliability, calculated MTBF (MIL-HDBK217F)		>2.9 Mio h
Isolation voltage (60sec.)	- Input/Output	1500 VDC
Isolation capacitance	- Input/Output	50 pF max.
Isolation resistance	- Input/Output (500 VDC)	>1 GOhm
Switching frequency	single output models: dual output models:	400 kHz typ. 500 kHz typ.
Remote On/Off	- On: - Off: - Off stand by input current	open or high impedance 2...4 mA current applied via 1KOhm resistor 2.5 mA max.
Safety standards		IEC/EN 60950-1, UL 60950-1
Altitude during operation		tbd
Environmental compliance	- Reach - RoHS	<a href="http://www.tracopower.com/products/reach-declaration.pdf">www.tracopower.com/products/reach-declaration.pdf</a> RoHS directive 2011/65/EU

**Physical Specifications**

Casing material		metal
Potting material		silicone, (UL 94V-0 rated)
Weight		5.9 g (0.21oz)

**Outline Dimensions**

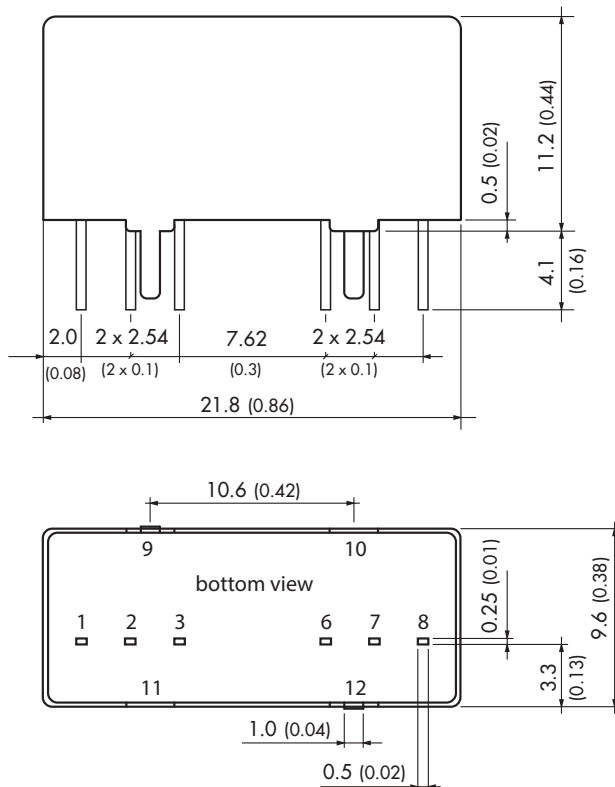

Pin-Out		
Pin	Single	Dual
1	-Vin (GND)	-Vin (GND)
2	+Vin (Vcc)	+Vin (Vcc)
3	Remote On/Off	Remote On/Off
6	+Vout	+Vout
7	-Vout	Common
8	No function	-Vout
9	Case	Case
10	Stand off	Stand off
11	Stand off	Stand off
12	Case	Case

Dimensions in [mm], ( ) = Inch  
Tolerances: ±0.5 (±0.02)  
Pin pitch tolerances: ±0.25 (±0.01)

Specifications can be changed without notice! Make sure you are using the latest documentation, downloadable at [www.tracopower.com](http://www.tracopower.com)