

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

© COPYRIGHT - BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.




LOC	DIST	REVISIONS					
AJ	16	P	LTR	DESCRIPTION	DATE	DWN	APVD
			A	REVISED PER EC 0514-0150-05	05OCT2005	REH	JL

D

C

B

A

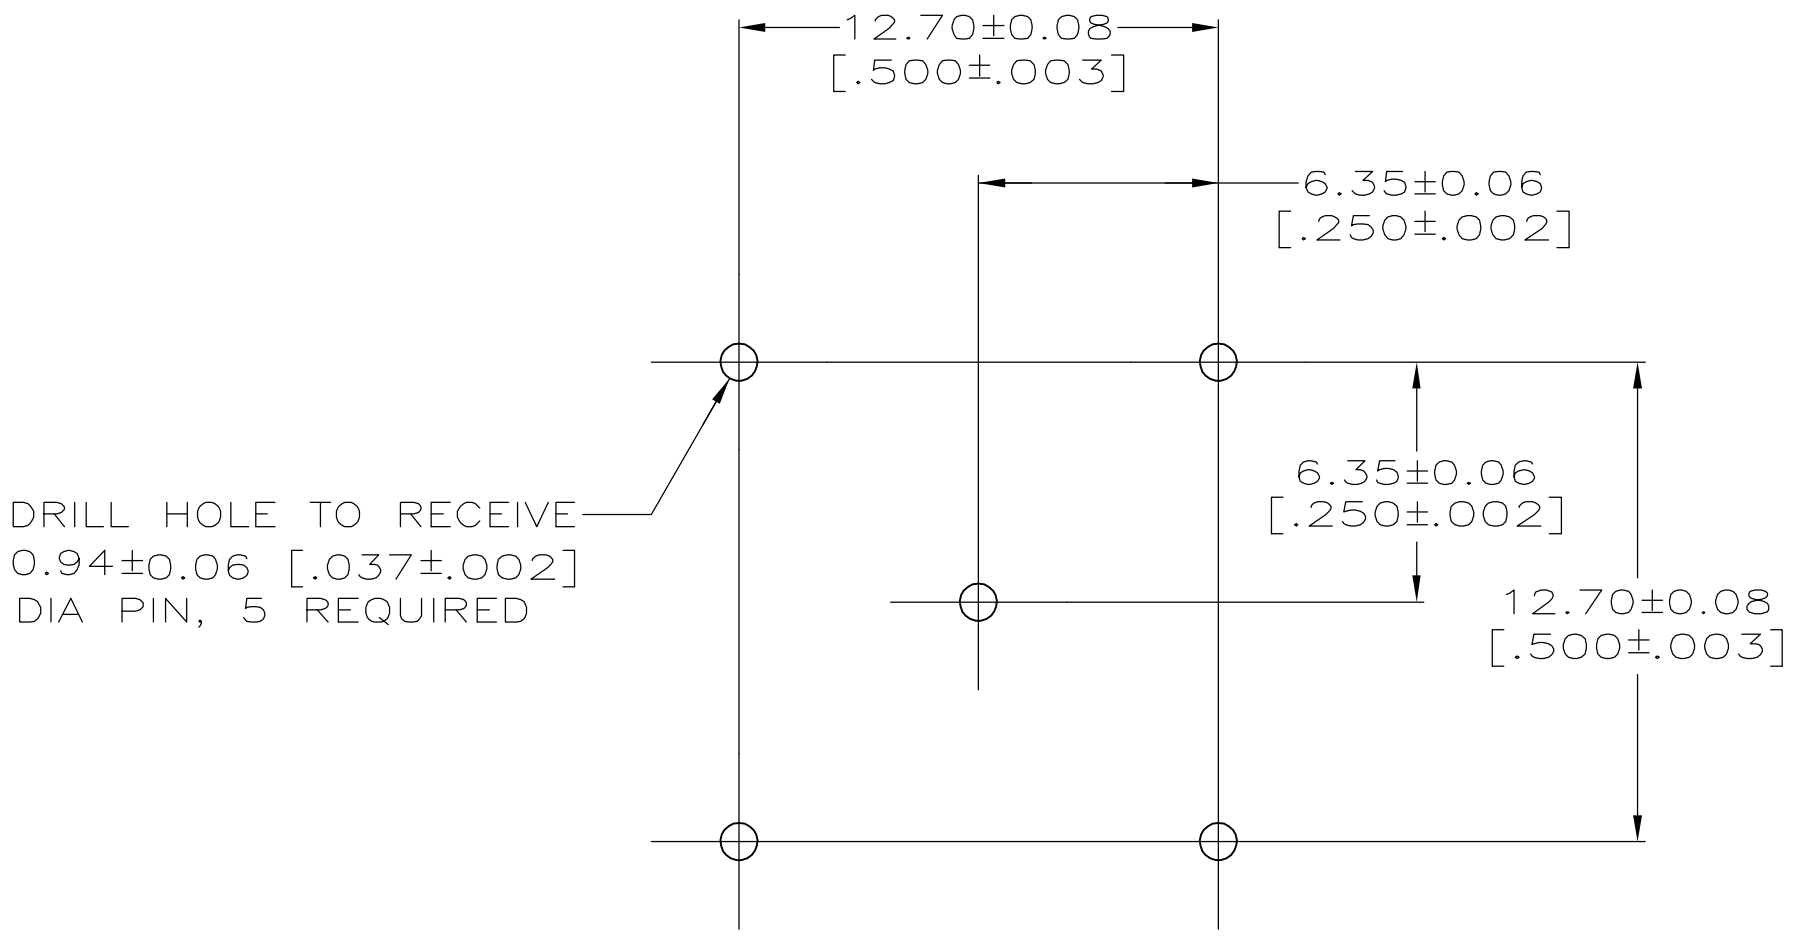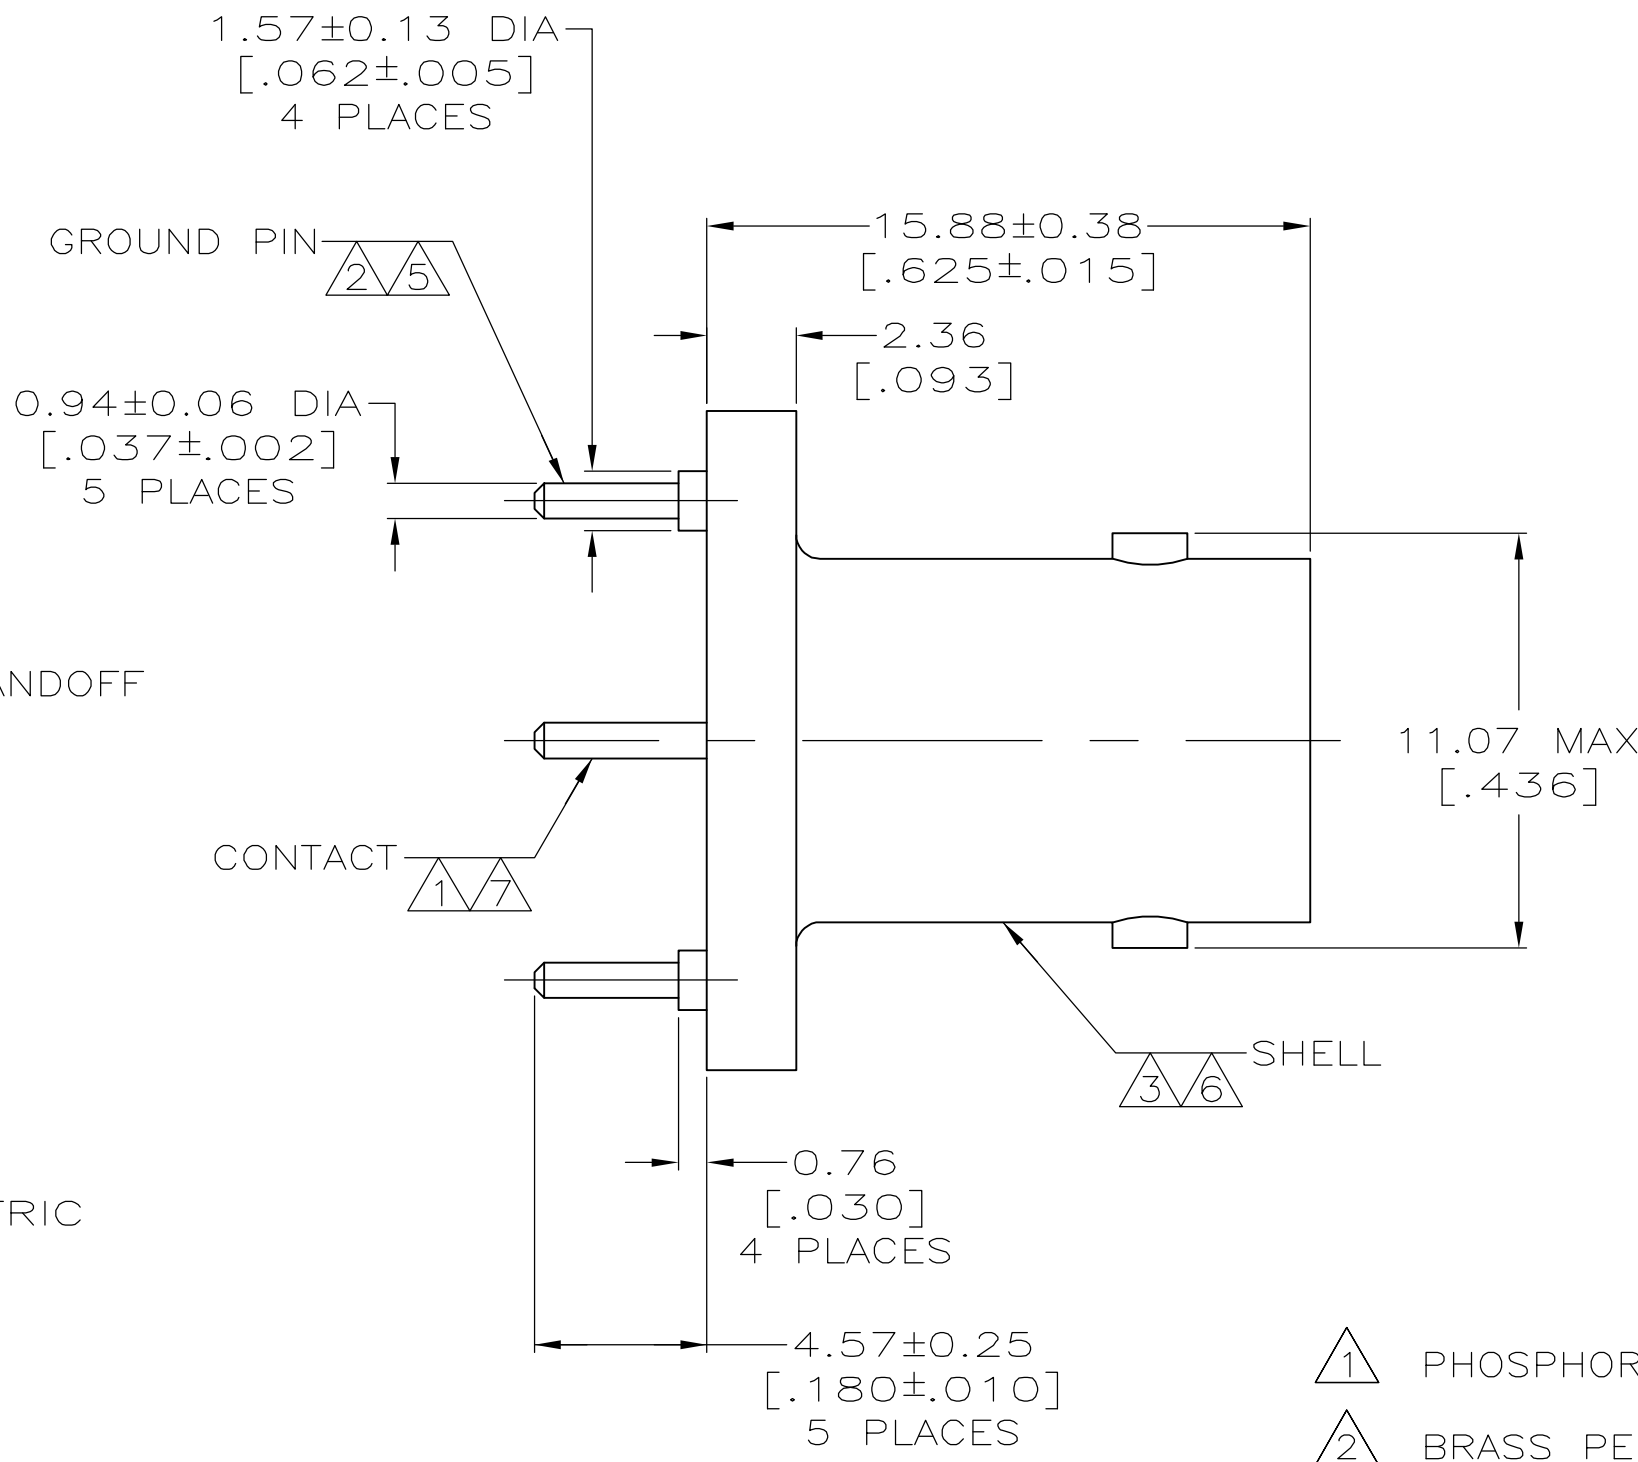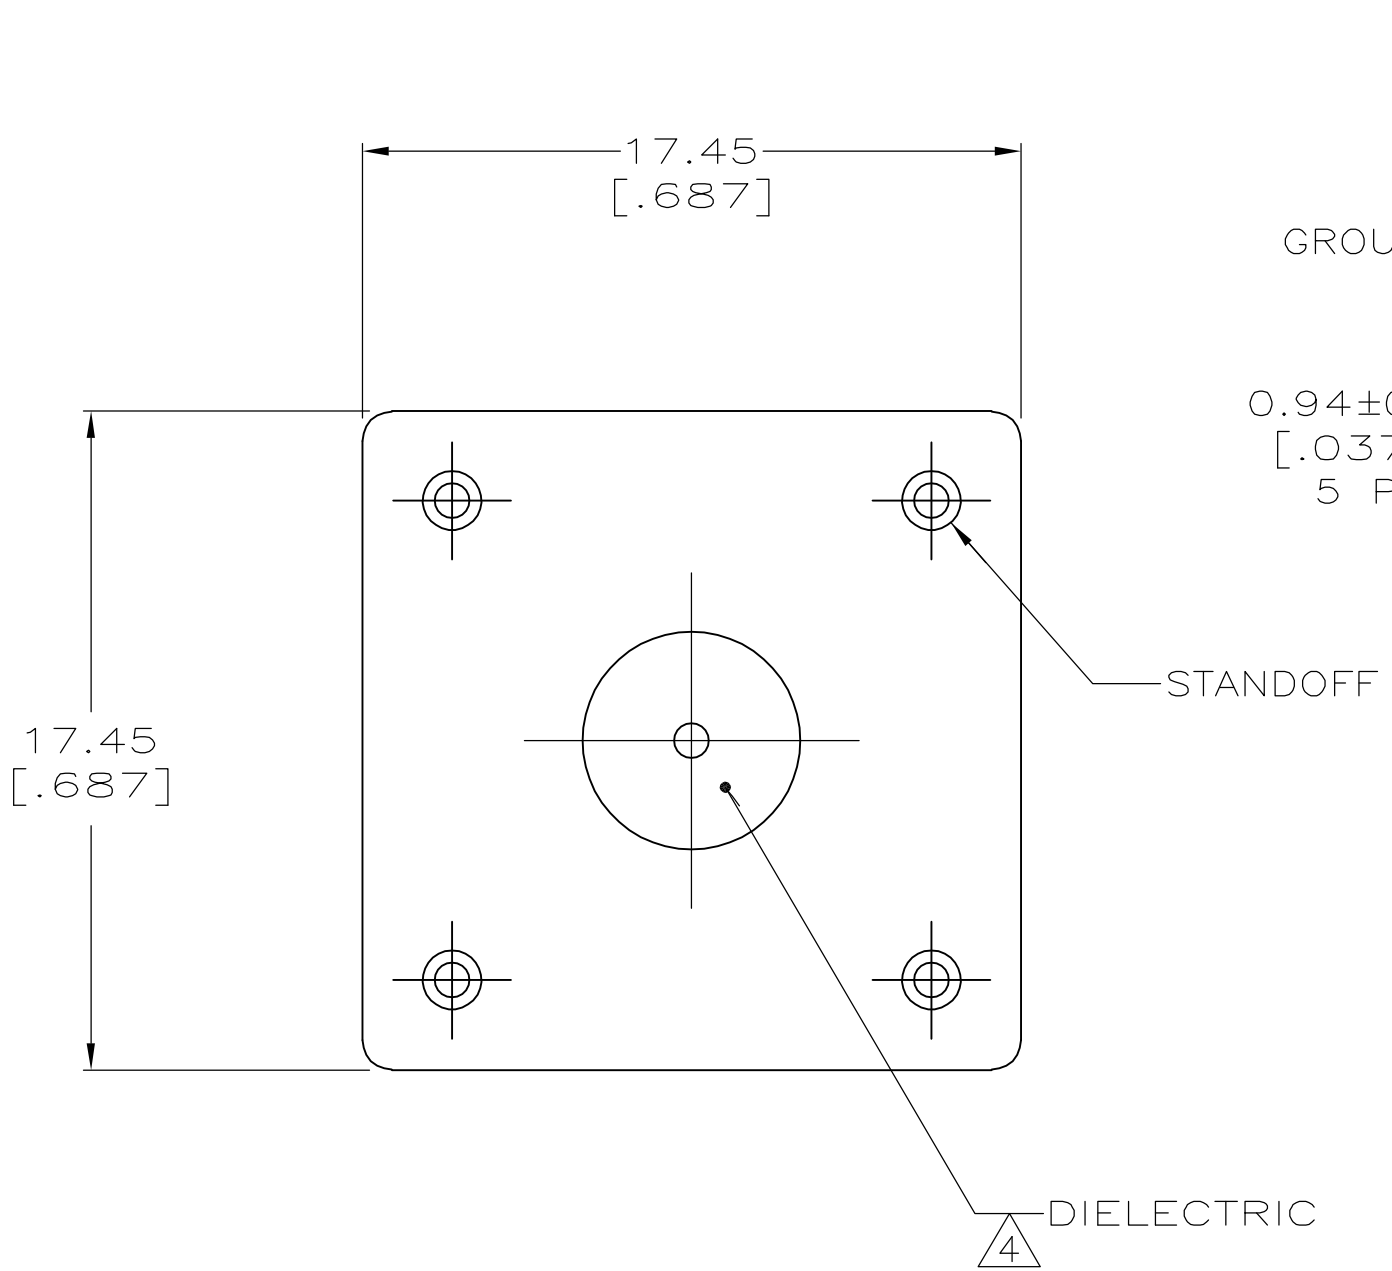

DRILL HOLE TO RECEIVE
0.94±0.06 [0.037±0.002]
DIA PIN, 5 REQUIRED

SUGGESTED PCB CONFIGURATION

- 1 PHOSPHOR BRONZE PER QQ-B-750.
- 2 BRASS PER ASTM-B-16.
- 3 ZINC PER QQ-Z-363.
- 4 POLYESTER, PBT, PER MIL-M-24519.
- 5 TIN PLATE PER ASTM-B-545
2.54 μ m [0.000100] MINIMUM THICK.
- 6 NICKEL PLATE PER QQ-N-290
3.81 μ m [0.000150] MINIMUM THICK.
- 7 GOLD PLATE PER ASTM-B-488,
0.76 μ m [0.000030] MINIMUM THICK.
- 8. SEE INSTRUCTION SHEET 408-9889.

5414460-1
PART NO

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN J. ALCORTA - 26APR2005 CHK J. HAVENER 26APR2005 APVD J. LIPPERT 26APR2005	tyco Electronics Tyco Electronics Corporation Harrisburg, PA 17105-3608			
DIMENSIONS: mm [INCHES]	TOLERANCES UNLESS OTHERWISE SPECIFIED:	PRODUCT SPEC 108-12078	NAME JACK, 50 OHM, VERTICAL, PCB, BNC			
	0 PLC ± - 1 PLC ± - 2 PLC ± 0.20 [0.008] 3 PLC ± - 4 PLC ± - ANGLES ± -	APPLICATION SPEC -	SIZE A2	CAGE CODE 00779	DRAWING NO C=5414460	RESTRICTED TO -
	MATERIAL SEE NOTES 1 - 4	FINISH SEE NOTES 5 - 7	WEIGHT -	CUSTOMER DRAWING		
		SCALE 5:1	SHEET 1 of 1	REV A		