Coil former

Material: GFR polyterephthalate (UL 94 V-0, insulation class to IEC 85: F ≙ max. operating temperature 155 °C), color code black
Solderability: to IEC 68-2-20, test Ta, method 1 (aging 3): 235 °C, 2 s
Resistance to soldering heat: to IEC 68-2-20, test Tb, method 1B: 350 °C, 3,5 s
Winding: see page 157

Yoke

Material: Stainless spring steel (0,4 mm)

Coil former					Ordering code	PU
Sections	A_N mm²	l_N mm	A_H value μΩ	Pins		Pcs
1	315,6	96	10,5	22	B66396-A1022-T1	75
Yoke (ordering code per piece, 2 are required)					B66396-A2000	75
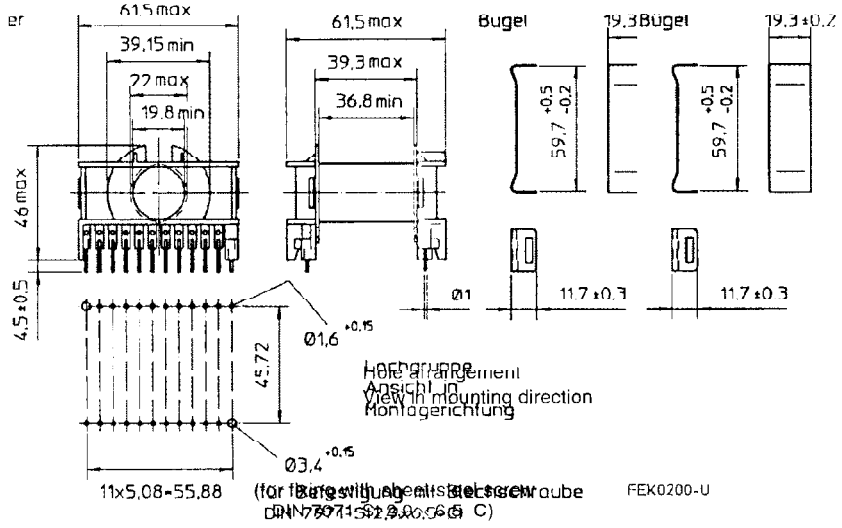
Coil former **Yoke**