


NUMBER
480439

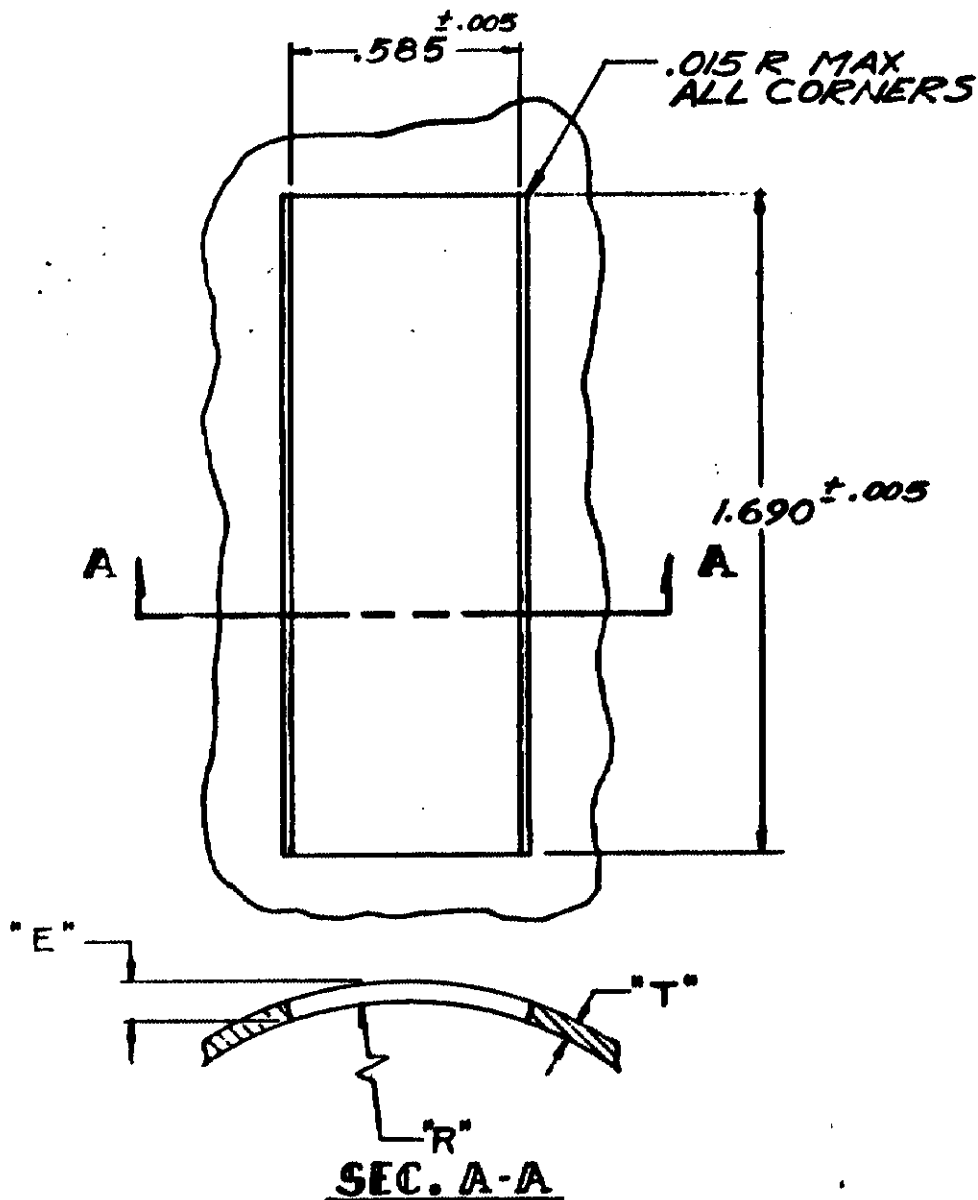

1. EFFECTIVE PANEL THICKNESS "E" IS .040-.100 AND IS DEPENDENT ON "T" AND "R".
2. CAP MUST BE INSERTED IN A ROCKING MANNER.
3. THE PANEL MUST BE PUNCHED SO THAT THE HOUSING ENTERS THE PANEL IN THE SAME DIRECTION AS THE PUNCH
4. PANEL MUST NOT HAVE ANY MATERIAL (PAINT, PORCELAIN, ETC.) APPLIED IN THE MOUNTING HOLE AREA THAT WOULD DECREASE RETENTION OF THE HOUSING IN THE PANEL.

DIMENSIONS IN INCHES DO NOT SCALE PRINT

©1966 BY AMP INCORPORATED. ALL RIGHTS RESERVED. AMP PRODUCTS COVERED BY PATENTS AND/OR PATENTS PENDING.

CUSTOMER COPY
REFERENCE ONLY

MATERIAL AND FINISH

_____ X _____

AMP

AMP INCORPORATED
HARRISBURG, PENNA.

CLASS _____ X _____

WIRE — RANGE — INSULATION

_____ X _____ X _____

TYPE _____ X _____

TOLERANCE EXCEPT
AS NOTED

$\pm 1/100$

SCALE
2x1

LOC
CM

NO

A

480439

REV
B

NAME RECOMMENDED MOUNTING INFORMATION
FOR 16 CIRCUIT MATE-N-LOK MOTOR MOUNT CAP