

TRANSVERSE AUX. SWITCH,
SUITABLE F. ELECTRONICS, 1CO,
SCREW CONNECTION,
FOR CIRCUIT-BREAKERS SZ S00/S0



General technical data:		
product brand name		SIRIUS
product designation		auxiliary switch, transverse on the front, electronics compatible
Design of the product		electronics compatible transverse auxiliary switch
Size of the circuit-breaker		S00, S0
Protection class IP / on the front		IP20
Ambient temperature		
• during storage	°C	-50 ... +80
• during operating	°C	-20 ... +60

Auxiliary circuit:		
Number of NC contacts / for auxiliary contacts		
• instantaneous switching		0
Number of NO contacts / for auxiliary contacts		
• instantaneous switching		0
Number of changeover contacts / of the auxiliary contacts		
• instantaneous switching		1
Operating current / of the auxiliary contacts		
• at DC-13		
• at 24 V	A	0.3

- at 48 V
- at 60 V

A	0.3
A	0.3

Installation/mounting/dimensions:

Type of mounting		plug-in fixing
Width	mm	45
Height	mm	12
Depth	mm	17

Connections:

Design of the electrical connection		screw-type terminals
• for auxiliary and control current circuit		
Type of the connectable conductor cross-section		
• for auxiliary contacts		
• solid		2x (0.5 ... 1.5 mm²), 2x (0.75 ... 2.5 mm²)
• finely stranded		
• with conductor end processing		2x (0.5 ... 1.5 mm²), 2x (0.75 ... 2.5 mm²)
• for AWG conductors / for auxiliary contacts		2x (20 ... 14)

Certificates/approvals:

Verification of suitability		CE / UL / CSA / CCC
-----------------------------	--	---------------------

General Product Approval	Declaration of Conformity	Test Certificates
 CCC	 EG-Konf.	Special Test Certificate
 CSA		Type Test Certificates/Test Report
 UL		

Shipping Approval



Shipping Approval other



Further information:

Information- and Downloadcenter (Catalogs, Brochures,...)




<http://www.siemens.com/industrial-controls/catalogs>

Industry Mall (Online ordering system)

<http://www.siemens.com/industrial-controls/mall>

CAX-Online-Generator

<http://www.siemens.com/cax>

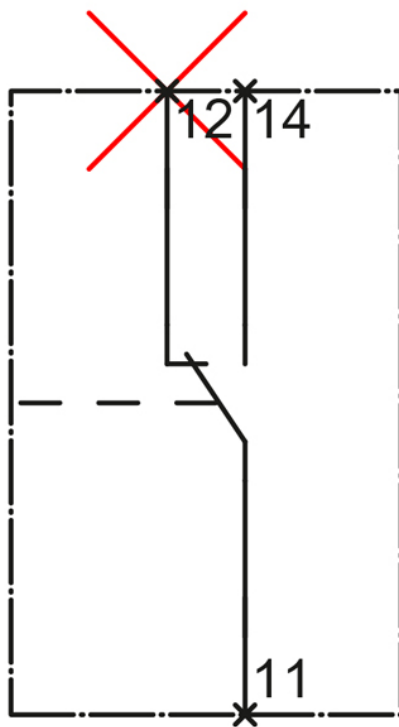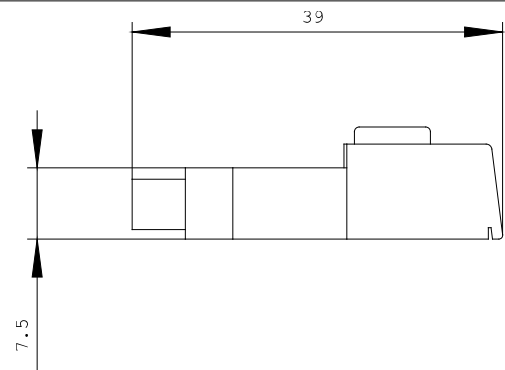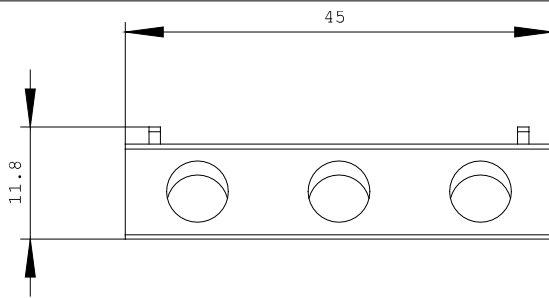

last change:

Sep 10, 2012