

E

D



A

C

B

DO NOT SCALE DRAWING

EC NO. DRWN: CHK: APPR:	EC NO. DRWN: CHK: APPR:	EC NO. DRWN: CHK: APPR:	EC NO. DRWN: CHK: APPR:	EC NO. DRWN: CHK: APPR:	REDRAWN EC NO. JC2000-0629 DRWN: K.KOHAMA CHK: T.YAMAGUCHI APPR: M.FUKUSHIMA
8	7	6	5	4	3

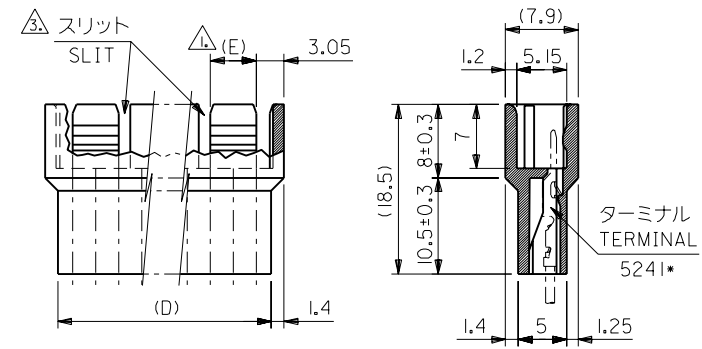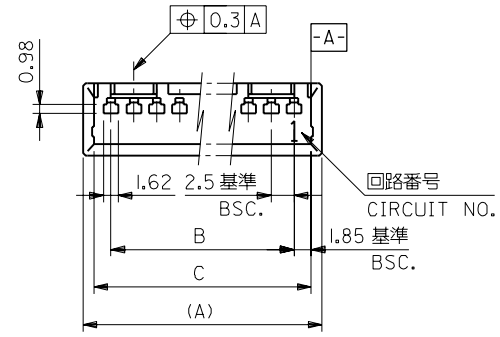

注)
NOTE.

△ フリクションロック構成:
FRICTION LOCK CONFIGURATION:
4極までは1箇所
4CKT AND UNDER - 1LOCK
5極以上は2箇所
5CKT AND OVER - 2LOCKS

2. 嵌合相手: 5102-N
MATES WITH HOUSING: 5102-N

△ スリット構成:
SLIT CONFIGURATION:
4極以下はなし
4CKT AND UNDER - NO SLIT
5及び6極は1箇所
5 AND 6CKTS - 1 SLIT
7極以上は2箇所
7CKT AND OVER - 2 SLITS

29-11-0153	5240-151	35	38.7	41.1	5	38.3		15
▲ -0143	▲ -141	32.5	36.2	38.6	5	35.8		14
-0133	-131	30	33.7	36.1	5	33.3		13
-0123	-121	27.5	31.2	33.6	5	30.8		12
-0113	-111	25	28.7	31.1	5	28.3		11
-0103	-101	22.5	26.2	28.6	5	25.8		10
-0093	-091	20	23.7	26.1	5	23.3		9
-0083	-081	17.5	21.2	23.6	5	20.8		8
-0073	-071	15	18.7	21.1	5	18.3		7
-0063	-061	12.5	16.2	18.6	5	15.8		6
-0053	-051	10	13.7	16.1	3.75	13.3		5
-0043	-041	7.5	11.2	13.6	7.5	10.8		4
▼ -0033	▼ -031	5	8.7	11.1	5	8.3		3
29-11-0023	5240-021	2.5	6.2	8.6	2.5	5.8		2
EDP.NO.	ENG.NO.	B	C	(A)	(E)	(D)	極数 CKT.	

GENERAL TOLERANCES: (UNLESS SPECIFIED) 一般公差		SCALE 2:1	DESIGN UNITS ☒ mm ☐ INCH	THIRD ANGLE PROJECTION	DIMENSIONS: ☐ mm ☐ INCH ☒ mm ONLY		SHT REV
10 UNDER 未満	+0.2	DRAWN BY & DATE K.KOHAMA 007/3/28		TITLE: MINI. SPOX PLUG HSG.		REVISE ON CAD ONLY	
10 OVER 以上	+0.25	CHECKED BY & DATE T.YAMAGUCHI 007/3/30		MOLEX INCORPORATED		SHEET NO. I	
30 OVER 以上	+0.3	APPROVED BY & DATE M.FUKUSHIMA 007/3/30		MATERIAL NO. 5240-***I		SIZE B	
WIRE RANGE 適用電線範囲		CAD FILENAME S5240.S01		DRAWING NO. SD-5240-NI		EN-02J(097) MXJ-54	
INS. RANGE 被覆外径		ANGLE 角度		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION.			

F

E

D

C

B

A

S5240.S01