


## Solutions for Electronic Specialty Markets (ESM)

### Product Catalog for Electronic Specialty Markets

- 3M™ Electronic Specialty Markets - New Product Releases
- 3M™ Abrasives
- 3M™ Adhesives, Cleaners & Compounds
- 3M™ Breadboards & Test Clips
- 3M™ Cable & Assemblies
- **3M™ Copper Interconnects**
- 3M™ Fiber Optics
- 3M™ Fire Protection
- 3M™ Heat Shrink
- 3M™ Identification Systems
- 3M™ Occupational Health & Safety Products
- 3M™ Protective Bumpers
- 3M™ Reclosable Fasteners
- 3M™ Splicing, Terminating & Ducting
- 3M™ Static Control
- 3M™ Tapes
- 3M™ Terminals, Kits & Tools
- 3M™ Vacuums & Accessories
- 3M™ Warehousing & Packaging Supplies
- 3M™ Wire Connectors

[Product Catalog for Electronic Specialty Markets](#) > [3M™ Copper Interconnects](#) > [Boardmount](#) > [Boardmount Socket](#) >

 [Printer-friendly format](#) **3M™ .100 in. Boardmount Socket, 929974-01-36**  
**.100" 36 contacts, Straight Solder Tails, Board mounting option standard product without kinked tail, One row plating 100µ" [2.54µm] tin lead, Tin Lead plating.**



[\[click to enlarge\]](#)

GTIN(UPC/EAN) : 0 00 54007 76121 1  
 3M Id : 80-6200-8436-0

### Additional Information

Learn More . . .
<a href="#">Packaging</a> <a href="#">Data</a>

### Characteristics


China RoHS - Below MCV	No
Contact Material	Copper Alloy
Contact Termination Area Plating	100 µ" [2.54 µm] 90/10 Tin/Lead
Contact Underplating	100 µ" [2.54 µm] Nickel
Contact Wiping Area Plating	100 µ" [2.54 µm] 90/10 Tin/Lead
Current Rating	1 Ampere
EPC Can View	Public
EU RoHS Compliant	No
Height	.325 Inch
Insulation Color	Black
Insulation Flammability Rating	UL 94V-0
Insulation Material	Glass Filled Polyester (PBT)
Insulation Resistance	>5 X 10 <sup>9</sup> Ohms @ 500 Vdc
Interface Grid	.100"
Interface Style	Rectangular Socket
Markings	None
Mounting Option	None
Non-Operating Temperature	-40 to 105 Degree Celsius
Number of Contact Rows	1
Number of Contacts	36
Orientation	Vertical

<b>Pitch</b>	0.100 Inch
<b>Primary Trademark Name</b>	3M
<b>Separable</b>	Yes
<b>Termination Method</b>	Solder Tail
<b>Termination Style</b>	Printed Circuit Board
<b>Withstanding Voltage</b>	1500 Vrms at Sea Level

# 3M™ Boardmount Socket

.100" and .100" × .100" Straight, Solder Tails

929 Series

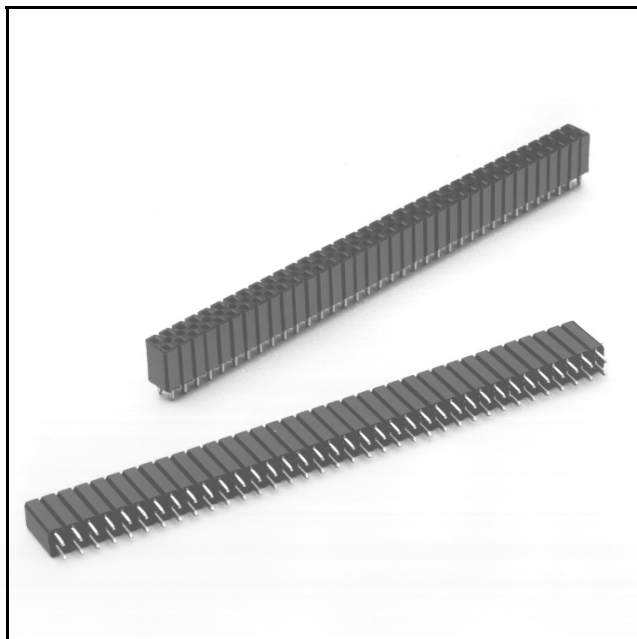

- 1-40 contacts on single row, 2-80 contacts on two row
- Tuning fork contact design
- Solder standoffs facilitate production wave soldering
- Optional board retention feature
- See Regulatory Information Index (RIA) for chemical compliance information

Date Modified: October 29, 2007

TS-0815-C  
Sheet 1 of 2

---

## Physical

**Insulation Material:** Glass Filled Polyester (PBT) or High Temperature Nylon

Flammability: UL 94V-0

Color: Black

**Contact Material:** Copper Alloy

**Plating**

Underplating: 100 μ" [ 2.54 μm ] Nickel

Wiping Area: See ordering information options for thickness

Solder Tails: Tin Lead or Matte Tin (See ordering information)

**Marking:** None

---

## Electrical

**Current Rating:** 1 A

**Insulation Resistance:**  $> 5 \times 10^9 \Omega$  at 500 V<sub>DC</sub>

**Withstanding Voltage:** 1500 V<sub>RMS</sub> at Sea Level

---

## Environmental

**Temperature Rating:** -40°C to +105°C

**Process Rating:** 260°C (per J-STD-020C)

(PBT Insulator version), Maximum molded insulator temperature 191°C  
(Solder Wave Process Only)

UL File No.: E68080

# 3M™ Boardmount Socket

.100" and .100" × .100" Straight, Solder Tails

929 Series

**Section A-A**

Optional board retention feature shown

**Recommended Mounting Hole Patterns**  
(Shown for Mounting Side of Board)

Notes:

- Maximum recommended mating header pin length is .25 [ 6.4 ].
- Recommended to be mated to the .100 [ 2.54 ] X .100 [ 2.54 ] pin strip headers: 929 series and 2300 series.

Contact Quantity Code	Contact Quantity 1 Row	Contact Quantity 2 Row	Dimension A (Reference Only)
02	02	04	0.20 [ 5.08 ]
03	03	06	0.30 [ 7.62 ]
04	04	08	0.40 [ 10.16 ]
05	05	10	0.50 [ 12.70 ]
06	06	12	0.60 [ 15.24 ]
07	07	14	0.70 [ 17.78 ]
08	08	16	0.80 [ 20.32 ]
09	09	18	0.90 [ 22.86 ]
10	10	20	1.00 [ 25.40 ]
11	11	22	1.10 [ 27.94 ]
12	12	24	1.20 [ 30.48 ]
13	13	26	1.30 [ 33.02 ]
14	14	28	1.40 [ 35.56 ]
15	15	30	1.50 [ 38.10 ]
16	16	32	1.60 [ 40.64 ]
17	17	34	1.70 [ 43.18 ]
18	18	36	1.80 [ 45.72 ]
19	19	38	1.90 [ 48.26 ]
20	20	40	2.00 [ 50.80 ]
21	21	42	2.10 [ 53.34 ]
22	22	44	2.20 [ 55.88 ]
23	23	46	2.30 [ 58.42 ]
24	24	48	2.40 [ 60.96 ]
25	25	50	2.50 [ 63.50 ]
26	26	52	2.60 [ 66.04 ]
27	27	54	2.70 [ 68.58 ]
28	28	56	2.80 [ 71.12 ]
29	29	58	2.90 [ 73.66 ]
30	30	60	3.00 [ 76.20 ]
31	31	62	3.10 [ 78.74 ]
32	32	64	3.20 [ 81.28 ]
33	33	66	3.30 [ 83.82 ]
34	34	68	3.40 [ 86.36 ]
35	35	70	3.50 [ 88.90 ]
36	36	72	3.60 [ 91.44 ]
40	N/A	80	4.00 [ 101.60 ]

**Ordering Information**

**9X9XXX-01-XX-XX**

2 = Standard Product  
(no board retention feature)

3 = With board retention feature

1 Row Plating Options:  
850 = Gold  
974 = Tin

2 Row Plating Options\*  
852 = Gold  
975 = Tin

Plating Suffix:  
blank = tin-lead (RIA E3 & C2 apply)  
RK = matte tin overall H.T. Nylon Insulator (RIA E1 & C1 apply)  
10 = 10µ" [0.25µm] gold with tin-lead tails (RIA E3 & C2 apply)  
30 = 30µ" [0.76µm] gold with tin-lead tails (RIA E3 & C2 apply)  
RA = 10µ" [0.25µm] gold with matte tin tails (RIA E1 & C1 apply)  
RB = 30µ" [0.76µm] gold with matte tin tails (RIA E1 & C1 apply)

Contact Quantity Code:  
(see table)

TS-0815-C  
Sheet 2 of 2