

# BS 4808 0.75mm<sup>2</sup>



**Part NO:** RGW-885-3

**Product Code:** BS 4808 0.75mm<sup>2</sup> Part 2 Class 3

**Product Description**

**Reference Standard**

Customer's sample spec.and the general standard

**Multi-construction**

1

**Cable Construction**

<b>Conductor</b>	<b>Tinned Copper</b>
square(mm <sup>2</sup> )	0.75
Construction	T0.2±0.008×24
Standard Dia.(mm)	1.13
<b>Insulation</b>	<b>PVC</b>
Thickness	0.59
Insulation Dia.(±0.1mm)	2.30 +0.15/-0.1
Insulation Color	According to the customer

**Marking**

According to the customer

**PACKAGING**


100M/Reel

500M/Reel

**Revision History**

A0-1

**Design**

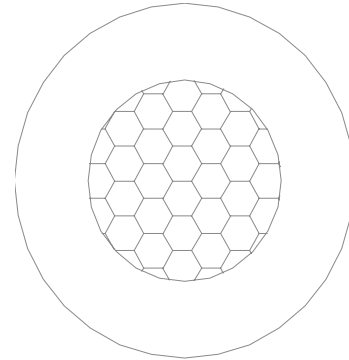

**Electrical Characteristics**

Max.Conductor DC Resistance at 20°C ( Ω /Km)	<25.2
Min.Insulation DC Resistance at 20°C (MΩ *Km)	200
Rated Temperature(°C)	85
Rated Voltage (V)	1500

**RoHS GUIDELINE**

We operate according to the following standards

Control Item	Standard	Testing Method	Testing Equipment
Cadmium content (Cd)	<0.01%	EN1122	ICP-AES
Lead content (Pb)	<0.1%	EPA3050B	ICP-AES
Mercury content (Hg)	<0.1%	EPA3052	ICP-AES
Chromium (VI) content	<0.1%	EPA3060(UN-VIS)	ICP-AES
Polybrominated Biphenyls(PBB)	Forbidden	GC/MS	/
Polybrominated Diphenyl Ether (PBDE)	Forbidden	GC/MC	/

**Date:** 2010-04-13

**Page:** 1 / 1