






E

D


C

B

A

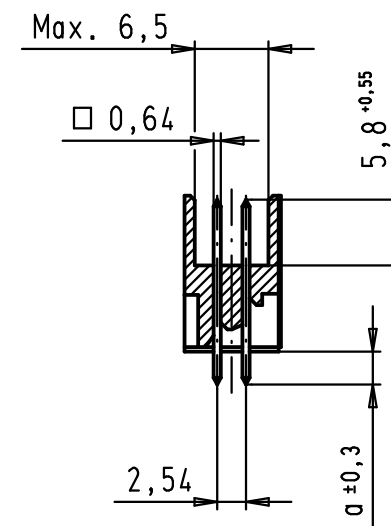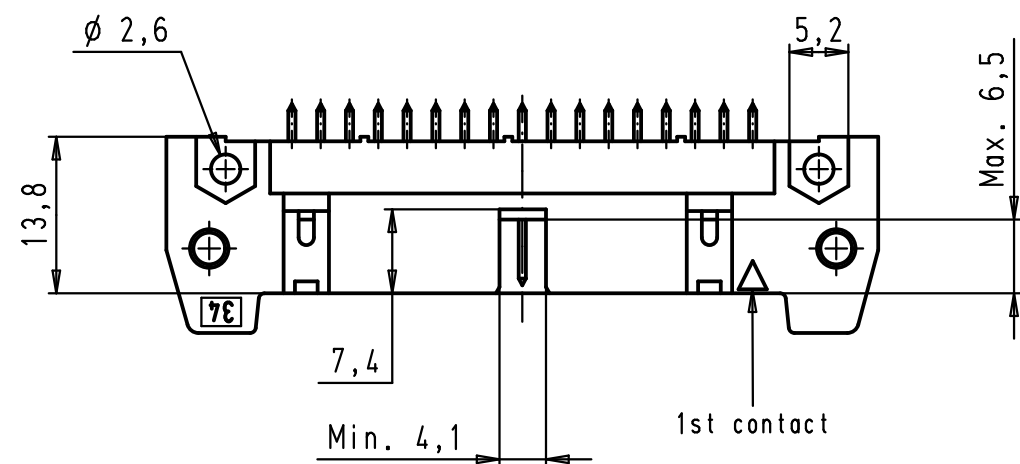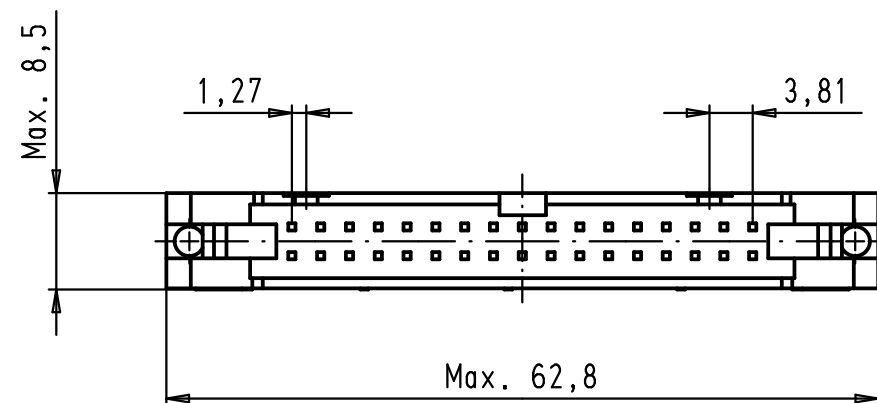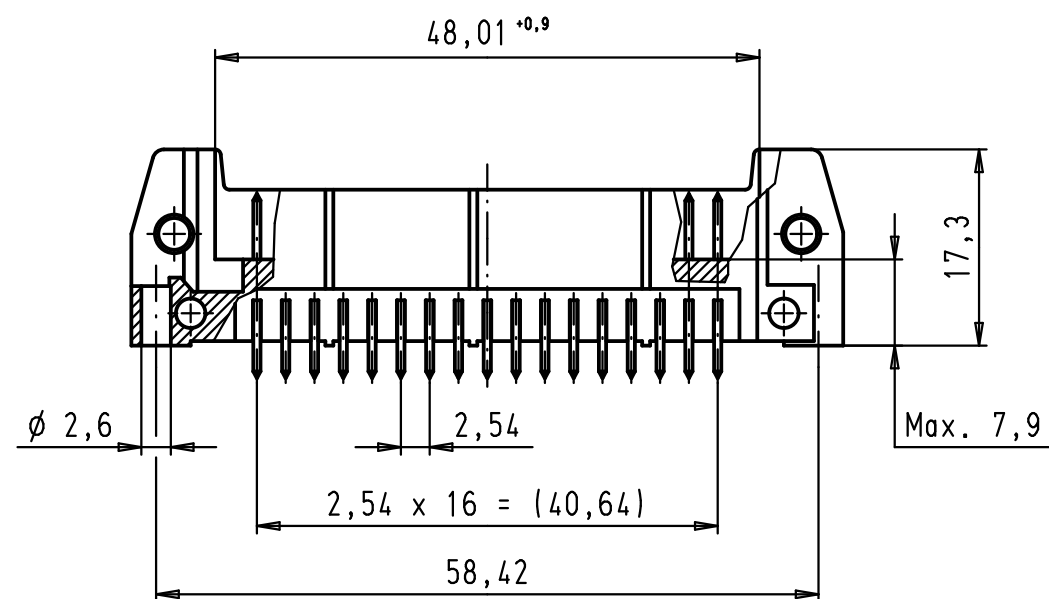


PCB layout, component side

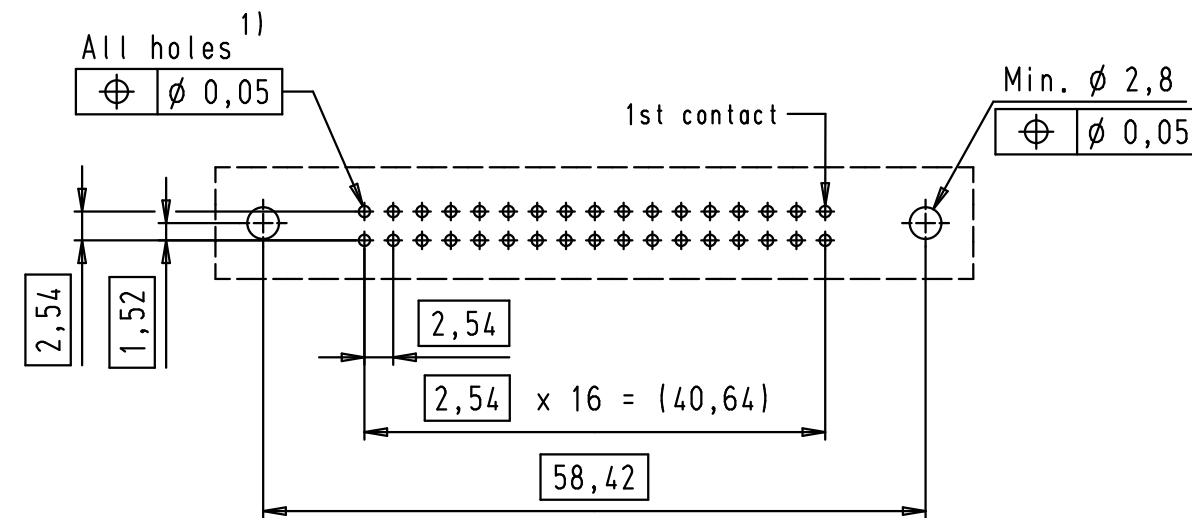

1) Solder pins for PCB connections $\varnothing 1 \pm 0,1$ according to IEC 60 326-3

09 18 534 7922	3	4,5
09 18 534 6922	2	4,5
09 18 534 5922	0,76 $\mu\text{m Au}$	4,5
09 18 534 7924	3	2,9
09 18 534 6924	2	2,9
09 18 534 5924	0,76 $\mu\text{m Au}$	2,9
Part number	Performance level	a

				Det.	Name	 All Dim. in mm Orig. Size DIN A 3	SEK 18 Male Connector Standard	Maßstab/ Scale
			Detail.	01/12/99	JB		34 poles	1,5:1
			Insp.				Straight solder pins	
			Stand.				Without locking levers	
34900	29/01/08	LP					TB 09 18 534 X92X	Blatt/ Page
27931	15/06/00	JB						1 / 2
26554	01/12/99	JB						
Mod.	Det.	Name	HARTING EURL F-95972 Paris				Sub.	