

## Grommet - WR-DA-PG21 - 1686698

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://download.phoenixcontact.com>)


Seal, outside, to increase the protection type, size Pg21



The illustration shows the version WR-DI-PG 21 and WR-DA-PG21



### Key commercial data

Packing unit	5 pc
Minimum order quantity	5 pc
GTIN	 4 017918 190026
Weight per Piece (excluding packing)	4.76 g
Custom tariff number	39269097
Country of origin	Germany

### Technical data

#### General

Pg screw connection	Pg21
Seal material	PUR

### Classifications

#### eCl@ss

eCl@ss 4.0	27141209
eCl@ss 4.1	27141209
eCl@ss 5.0	27149109
eCl@ss 5.1	27149109
eCl@ss 6.0	27149109
eCl@ss 7.0	27149109
eCl@ss 8.0	27149109

# Grommet - WR-DA-PG21 - 1686698

## Classifications

### ETIM


ETIM 2.0	EC000441
ETIM 3.0	EC000441
ETIM 4.0	EC002498
ETIM 5.0	EC002498

### UNSPSC

UNSPSC 6.01	30211808
UNSPSC 7.0901	39121408
UNSPSC 11	39121408
UNSPSC 12.01	39121408
UNSPSC 13.2	39121408

## Drawings

Dimensioned drawing

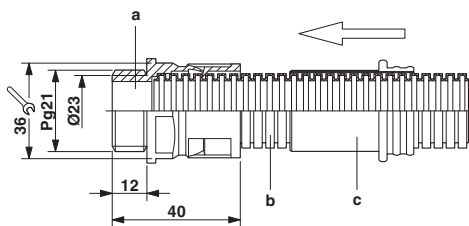

### Assembly instructions for Pg21 corrugated pipe

a = Corrugated screw connection


B = Corrugated pipe

c = Opener

Installation note:

Cut the corrugated pipe in the groove to retain a round shape for insertion. The lighter seal (not depicted in the illustration) is positioned in the corrugated pipe screw connection below the safety latch. The darker outer seal (not depicted in the illustration) is placed over the corrugated pipe screw connection from outside. The corrugated pipe is then pushed as far as possible into the corrugated pipe screw connection and clicks into place. The screw connection is opened by placing the yellow corrugated pipe opener with force between the safety latch and the corrugated tube and the corrugated pipe is then pulled out.

Dimensioned drawing

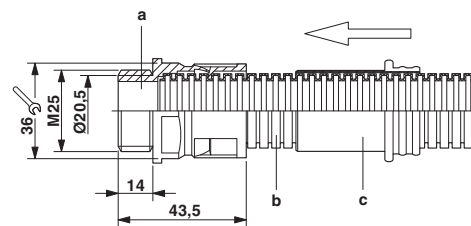

### Assembly instructions for M25 corrugated pipe

a = Corrugated screw connection

b = Corrugated pipe

c = Opener

Installation note:

Cut the corrugated pipe in the groove to retain a round shape for insertion. The lighter seal (not depicted in the illustration) is positioned in the corrugated pipe screw connection below the safety latch. The darker outer seal (not depicted in the illustration) is placed over the corrugated pipe screw connection from outside. The corrugated pipe is then pushed as far as possible into the corrugated pipe screw connection and clicks into place. The screw connection is opened by placing the yellow corrugated pipe opener with force between the safety latch and the corrugated tube and the corrugated pipe is then pulled out.