

year



reddot design award
honourable mention 2009

SC 28.19 *pro*

[paladin 172 419 *pro*]

- 1 channel
- Daily, weekly and yearly program
- 300 memory locations
- Minimum interval 1 min
- Switching capacity 16 A per channel
- Permanent by date / holiday function
- Manual permanent mode
- Manual override
- Automatic sorting of switching times on readout
- Unrestricted block programming
- Fully automatic daylight saving time
- Elapsed time and pulse counter
- Pulse function
- Cycle function
- Timer function
- Advanced warning function
- Channel button function
- DCF function
- Security by PIN-Code
- Illuminated display
- Compact 35 mm wide housing
- Data-key function

Further information / Accessory

Accessory: Data-key DK *pro*
and programming package PP 50 *pro*
(not included in delivery of the time switch)



Accessory: DCF radio receiver FU 20.00 *pro*
(not included in delivery of the time switch)




Comparable products ...

SC 98.X0 *pro* / paladin 179 6X0 *pro* with additional features:
4 TE, 1–4 channel version, external input

Highlights

- Yearly program with Easter function, Weekday function and Extra-switching-time function
- Text based menu and self-explanatory symbols
- Display with a large dot matrix area to provide two high resolution text lines
- Easy handling. Quick and intuitive programmable time switch
- Can be programmed with supply disconnected (6 years battery-reserve)
- Unlimited program security by E²-PROM
- Programmable with PC (Accessory Data-key DK *pro* and Programming package PP 50 *pro*)




Digital time switch SC 28.19 pro [paladin 172 419 pro] for DIN-rail mounting




Technical data

Supply voltage	230 V, 50–60 Hz other voltages on request
Power consumption	approx. 1.5 VA
Channel (potential-free)	Change-over, contact gap < 3 mm (μ)
Contact material	AgSnO ₂
Switching capacity	16 A / 250 V ~ at cosφ=1
Filament Lamp	2,000 W
Halogen Lamp	2,000 W
Fluorescent Lamp uncompensated	1,000 VA
Fluorescent Lamp series compensated	1,000 VA
Fluorescent Lamp parallel compensated	550 VA
Fluorescent Lamp double switch.	1,000 VA
Mercury Discharge Lamp uncompensated	4 x 125 W, 2 x 250 W, 1 x 400 W, 1 x 700 W
Mercury Discharge Lamp parallel compensated	6 x 50 W (7 μF), 4 x 125 W (10 μF), 2 x 250 W (18 μF), 1 x 400 W (25 μF), 1 x 700 W (40 μF)
Sodium Discharge Lamp uncompensated	2 x 250 W, 1 x 400 W
Sodium Discharge Lamp parallel compensated	2 x 150 W (20 μF), 1 x 250 W (32 μF), 1 x 400 W (45 μF)
Compact Fluorescent Lamp convent. lamp ballast	1,000 VA
Compact Fluorescent Lamp electron. lamp ballast	4 x electronic lamp ballast, power independent
Switching functions	ON, OFF; pulse, cycle, yearly program
Pulse length Pulse function (switching time)	00:01 up to 59:59 mm:ss
Pulse length Timer (man. switching)	0:00:01 up to 9:59:59 h:mm:ss
Pulse/Pause length Cycle	0:00:01 up to 9:59:59 h:mm:ss
Memory locations	300
Minimum interval	1 min
Time base	Quartz crystal
Power back-up (at 20°C)	approx. 6 years (depends on the Lithium-battery life)
Program security	unlimited (E ² -PROM)
Quartz cryst. accuracy (at 20°C)	≤ ±1 sec/day
Display	high resolution LCD (visible area 7.5 cm ²)
Permitted ambient temperature	-10°...+55°C
Enclosure	self-extinguishing thermoplastic
Dimensions	45 x 35 x 58 mm
Distribution board mounting	35 mm DIN-rail (DIN EN 50022)
Type of connection	Screw terminals (pull-up type)
Type of protection	IP 20 to DIN EN 60529
Class of protection	II when installed according to regulations
Accessories (not included in delivery)	Data-key DK pro, DCF radio receiver FU 20.00 pro, programming package PP 50 pro

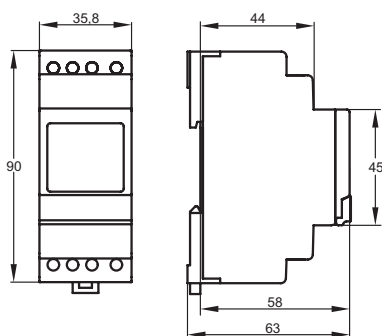

SC 28.19 pro / paladin 172 419 pro



Overview time switch functions

	Switching time	Channel-key
ON/OFF	✓	✓
Permanent	✓	✓
Pulse	✓	
Timer		✓
Cycle	✓	✓
Astro		
Permanent by date	✓	
Yearly program	✓	

Order number	Channels	Time base	Special function
SC 28.19 pro paladin 172 419 pro	1	Quartz/DCF	Yearly program

▲ Housing colour