




MTN/1100C Series

General purpose industrial accelerometer

Applications

- Paper machinery
- General industry
- Pumps, fans, etc.
- Air handling units
- Machine tools

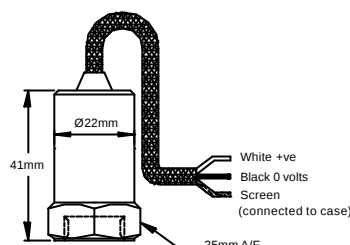

Technical Specification

Standard Sensitivity	100 mV/g $\pm 10\%$ nominal at 80 Hz
Frequency Response	2 Hz to 10 kHz $\pm 5\%$ (-3 dB at 0.8 Hz)
Mounted Base Resonance	18 kHz (nominal)
Isolation	Base isolated
Dynamic Range	$\pm 80g$
Transverse Sensitivity	Less than 5%
Electrical Noise	0.1 mg max
Current Range	0.5 mA to 8 mA
Temperature Range	-55 to 140 °C
Bias Voltage	12 Volts DC (nominal)
Case Material	Stainless steel
Cable	Integral stainless steel overbraided PTFE
Standard Cable Length	5 metres
Maximum Cable Length	1000 metres
Mounting Torque	8 Nm
Weight	110 gms (nominal)
Sealing	IP67
Options	Intrinsically safe, connector, cable length, various mounts, other sensitivities (see table).

ORDER CODE PART No	MOUNTING	XX = OPTIONAL SENSITIVITY RANGE AVAILABLE ($\pm 10\%$)
MTN/1100C-xx MTN/1100CQ-xx	1/4 UNF FEMALE QUICK FIT FEMALE	10 mV/g 30 mV/g 50 mV/g 500 mV/g 1 V/g
FOR OTHER MOUNTINGS SEE OVER PAGE.		


Mounting Adapters and Studs

Studs and Grub Screws




Male Studs		
Product Code	From	To
MS036	1/4" - 28 UNF	M6
MS039	1/4" - 28 UNF	10 - 32 UNF
MS067	1/4" - 28 UNF	M8
MS068	1/4" - 28 UNF	1/4" - 28 UNF
MS124	1/4" - 28 UNF	M10
MS132	1/4" - 28 UNF	M12

Quick Fit Adapters



Quick Fit (Q/F)		
Product Code	From	To
MS001	Q/F Male	Glue base
MS002	Q/F Male	M8 Male
MS003	Q/F Male	M10 Male
MS004	Q/F Male	1/4" - 28 UNF Male
MS006	Q/F Male	M6 Male

Other Adapters



Mounting Adapters		
Product Code	From	To
MS005	Q/F Male	1/4" - 28 UNF Female
MS007	Q/F Male	10 - 32 UNF Female
MS008	Q/F Male	M8 Female
MS011	1/4" - 28 UNF Male	Q/F Female
MS013	1/4" - 28 UNF Male	Glue Base
MS033	1/4" - 28 UNF Male	Q/F Female
MS038	Q/F Male	M8 Conical Male
MS061	1/4" - 28 UNF Male	10 - 32 UNF Male
MS079	1/4" - 28 UNF Male	Q/F Female
MS106	Q/F Male	M10 Female

Isolation		
Product Code	From	To
MS034	1/4" - 28 UNF Male	1/4" - 28 UNF Female
MS093	Q/F Male	M8 Male

System Connection

