




STRIP MATERIAL NUMBER	FINISH
84590-0022	OVERALL NICKEL 80µ" MINIMUM


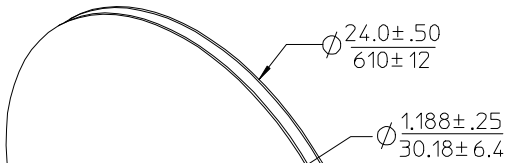


SECTION Z-Z



SECTION Y-Y

PAYOFF DIRECTION

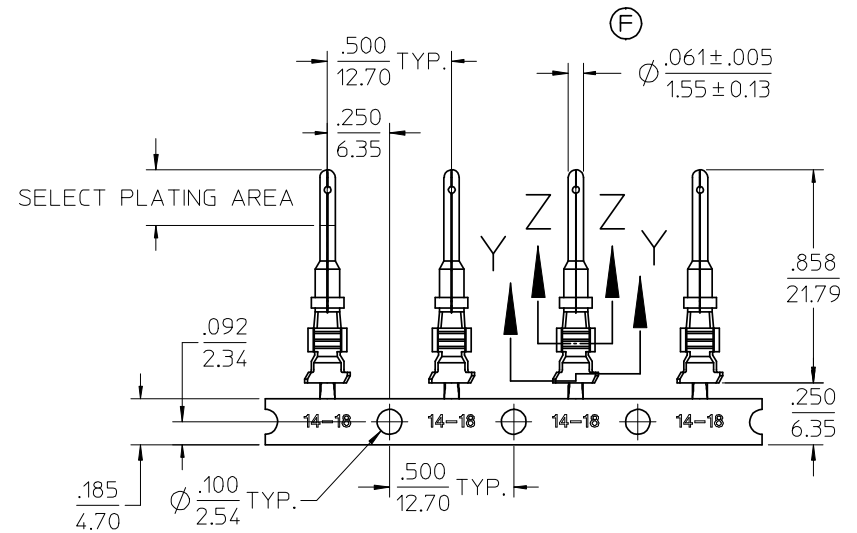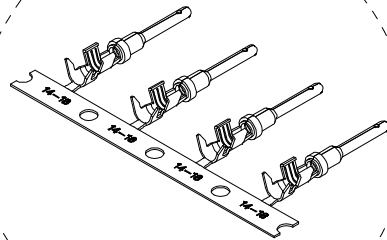

WIRE INSULATION O.D. RANGE .075-.150 / 1.91-3.81

NOTES:

1. MATERIAL: COPPER ALLOY .0120/0.305 THICK.
2. FINISH: SEE CHART.
3. STRIP TERMINALS ARE REELED AS SHOWN ABOVE, 3000 PARTS PER REEL.
4. TERMINAL FOR USE WITH SERIES XRC CONNECTOR ASSEMBLIES.
5. ALL DIMENSIONS ARE REFERENCE.
6. ALL MATERIALS AND FINISHES ARE ROHS COMPLIANT.

UPDATE NOTES & TABLE		QUALITY SYMBOLS		GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE		SCALE		DESIGN UNITS		THIRD ANGLE PROJECTION	
EC NO: WNA2008-0139		DRAWN:WLEUNG 2008/07/26		mm INCH		IN/MM		2:1		INCH			
CHKD:RDEROSS 2008/04/21		APPR:RDEROSS 2008/04/24		4 PLACES ± --- ± ---		DRAWN BY RSTONE		DATE 10/18/04		TITLE CONTACT PIN, 14-18 AWG,		F	
TIDRW:WLEUNG 2008/07/26		APPR:RDEROSS 2008/04/24		3 PLACES ± --- ± .010		CHECKED BY		DATE 10/18/04		APLaza		MOLEX INCORPORATED	
REV		DESCRIPTION		2 PLACES ± 0.25 ± .02		APPROVED BY		DATE 10/18/04		SD-84590-003		1 OF 1	
				1 PLACE ± 0.5 ± ---		LROTHAUS		MOLEX		MOLEX INCORPORATED			
				ANGULAR ± 1 °		MATERIAL NO.		DOCUMENT NO.				SHEET NO.	
				DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SEE CHART		SD-84590-003				1 OF 1	
						SIZE B		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION					