

**Specification Status: Released**

**Electrical Rating**


**Voltage: 32 V<sub>DC</sub> MAX**  
**Current: 100 A MAX**

Insulating Material:  
Cured, Flame Retardant Epoxy Polymer

Lead Material:  
20 AWG Tin Plated Copper

**Part Marking:**

- Manufacturer's Mark and Voltage
- ⊗ 32 — Part Identification
- EF7.5 — Lot Identification (can be on back)
- □ □ □ — Lot Identification (can be on back)

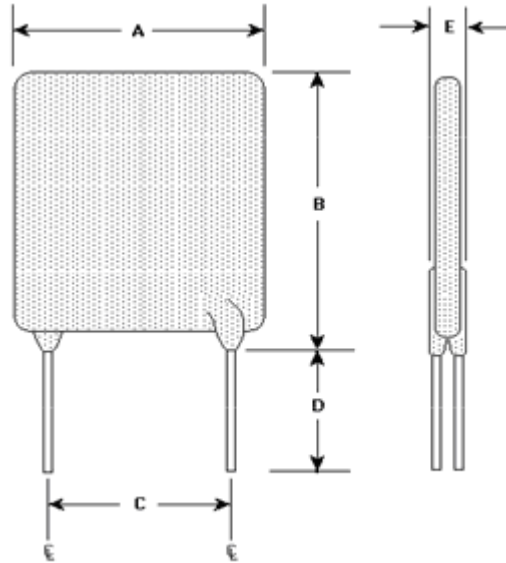

**TABLE I. INSTALLATION ENVELOPE DIMENSIONS:**

	A		B		C		D		E	
	MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX
mm:	--	21.1	--	24.9	9.4	10.9	7.6	--	--	3.8
in*:	--	(0.83)	--	(0.98)	(0.37)	(0.43)	(0.30)	--	--	(0.15)

\*Rounded off approximation

**TABLE II. PERFORMANCE RATINGS:**

I HOLD RATED CURRENT	CURRENT RATINGS		INITIAL RESISTANCE VALUES		TIME TO TRIP	R <sub>aMAX</sub>	TRIPPED-STATE POWER DISSIPATION
AMPS AT 25°C HOLD	AMPS AT 25°C HOLD	AMPS AT 25°C TRIP	OHMS AT 25°C MIN	OHMS AT 25°C MAX	SECONDS AT 25°C, 37.5 A MAX	OHMS AT 25°C MAX	WATTS AT 25°C TYP
7.5	7.5	15.0	0.0074	0.0147	13.0	0.023	6.5

Reference Documents: PS400, PS300 (reference for R<sub>1 MAX</sub>)  
 Precedence: This specification takes precedence over documents referenced herein.  
 Effectivity: Reference documents shall be the issue in effect on the date of invitation for bid.  
 CAUTION: Operation beyond the rated voltage or current may result in rupture, electrical arcing or flame.

**Materials Information**

ROHS Compliant

ELV Compliant

Pb-Free



**TABLE III. AUTOMOTIVE SPECIFIC STRESS TESTS AND TEST CONDITIONS:**

ELECTRICAL STRESS TESTS	TEST CONDITIONS (see note 2)
ESD Voltage Withstand (see note 1)	25kV
Short Circuit Fault Current Durability	25 cycles, 32V, 200A
Fault Current Durability	350 cycles, 32V/100A
End-of-life Mode Verification	1750 cycles, 32V/100A
Jump Start Endurance (see note 1)	3 cycles, 48V, 2 minute duration
Load Dump Endurance (see note 1)	10 cycles, 86.5V

Note 1: The PolySwitch devices are tested in series with a load resistance and the voltages specified in the test conditions are shared between the PolySwitch device and the load resistance as specified in PS400.

Note 2: Please refer to Appendix A of PS400 for the detailed test procedures