

CDX (mobility easy access)



Suitable for inward or outward opening doors

CDX - Compression Draught Excluder simple yet versatile threshold providing easy access for light wheeled traffic.

Easier access

Low profile ramp ideal for Hotels/Schools.

Robust and durable

Heavy duty aluminium construction with tough Nitrile rubber seal.

Retail Packed

Code : 04 SG 005

Sizes :
838mm (2'9") 1524mm (5'0)
914mm (3'0") 1828mm (6'0)
1219mm (4'0")



Finishes :
Aluminium Gold Effect

Contract Packed

Code : 04 CP 005

Sizes :
Up to 3048 mm (10'0")

Finishes :
Aluminium Gold Effect

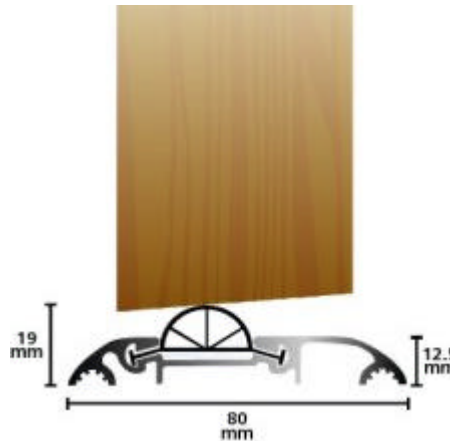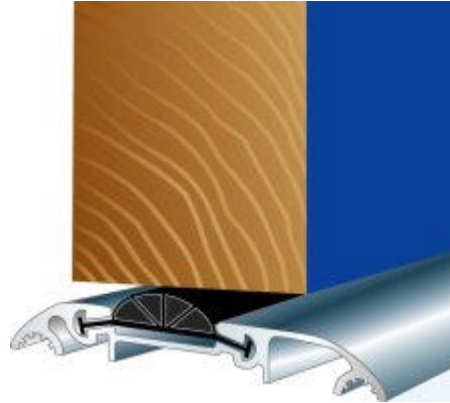



C.D.X COMPRESSION DRAUGHT EXCLUDER

FOR ALL CATEGORIES OF THRESHOLD USE

- Double sealing channels on underside.
- Improved sealing.
- Strengthened rubberised seal

Fitting Instructions

- 1 Before removing door from its hinges measure the gap between the bottom of the door and the floor beneath, all along its length, noting any variations due to uneven floor etc.
- 2 Remove the door and saw a piece off the bottom of the door at an angle of 8° which raises the outside bottom edge 20mm above the floor and the inside edge 14mm above the floor. This ensures that the draught strip is compressed as in Fig 1 when the door is closed.
- 3 Cut the C.D.X to exact width of the door frame i.e. fractionally longer than the door width.
- 4 Cut away door stops to a height of 12mm above the door width
- 5 Before fixing C.D.X to floor, rehang the door temporarily and test accuracy of work so far.
- 6 Remove the door again. Sand and paint door bottom and do not rehang until thoroughly dry.
- 7 Fit C.D.X in position and drill floor. Apply only 'Stormguard' ADMASTIK liberally in the two sealing channels and also in the two parallel lines on the floor. Wait for ADMASTIK to partly set before fastening C.D.X firmly to floor with stainless steel screws provided. Ensure that the ends of the C.D.X are sealed to the door frames with ADMASTIK.

NB

- 1 If a door is cut off too short to compress the draught strip, fasten a suitably shaped strip of wood, cut to size, on the underside of the door (See Fig 2)
- 2 It is essential that the contact surfaces are completely dry and clean before applying ADMASTIK.

Tools Required: Pencil, small hacksaw, wood saw, wood chisel, drill, tube of Admastik Sealant, Pliers

For door sills to work to their maximum performance they must be hermetically sealed and rigidly fastened to the floor to prevent any possibility of water penetration under the sill.

Fig 1

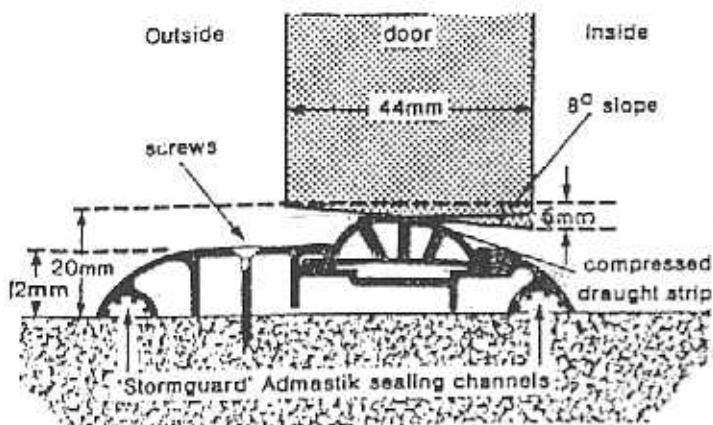


Fig 2

