

## Plug - PTDA 2,5/ 8-PH-5,0 - 1725636

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://download.phoenixcontact.com>)

Plug component, Nominal current: 14 A, Rated voltage (III/2): 400 V, Number of positions: 8, Pitch: 5 mm, Connection method: Spring-cage connection, Color: green, Contact surface: Tin




The figure shows a 10-position version of the product

### Why buy this product

- 5.0 mm pitch
- Large terminal block capacity with compact dimensions
- Attractive design for connection at a glance
- Optional color coding
- Plug with optional mechanical coding
- Spring-cage double connection with direct plug-in technology with a release button



### Key commercial data

|                                      |   |
|--------------------------------------|---|
| Packing unit                         | 100 pc  |
| GTIN                                 | <br>4 046356 129817 |
| Weight per Piece (excluding packing) | 14.14 g   |
| Custom tariff number                 | 85366990  |
| Country of origin                    | Germany   |

### Technical data

#### Dimensions

|             |       |
|-------------|-------|
| Pitch       | 5 mm  |
| Dimension a | 35 mm |

#### General

|                             |                |
|-----------------------------|----------------|
| Range of articles           | PTDA 2,5/..-PH |
| Insulating material group   | I              |
| Rated surge voltage (III/3) | 4 kV           |
| Rated surge voltage (III/2) | 4 kV           |
| Rated surge voltage (II/2)  | 4 kV           |

# Plug - PTDA 2,5/ 8-PH-5,0 - 1725636

## Technical data

### General

|   |                     |
|---|---------------------|
| Rated voltage (III/3)                   | 320 V               |
| Rated voltage (III/2)                   | 400 V               |
| Rated voltage (II/2)                    | 630 V               |
| Connection in acc. with standard        | EN-VDE              |
| Nominal current I <sub>N</sub>          | 13.5 A              |
| Nominal cross section                   | 2.5 mm <sup>2</sup> |
| Maximum load current                    | 13.5 A              |
| Insulating material                     | PA                  |
| Inflammability class according to UL 94 | V0                  |
| Stripping length                        | 10 mm               |
| Number of positions                     | 8                   |

### Connection data

|   |                     |
|---|---------------------|
| Conductor cross section solid min.  | 0.2 mm <sup>2</sup> |
| Conductor cross section solid max.  | 2.5 mm <sup>2</sup> |
| Conductor cross section stranded min.   | 0.2 mm <sup>2</sup> |
| Conductor cross section stranded max.   | 2.5 mm <sup>2</sup> |
| Conductor cross section stranded, with ferrule without plastic sleeve min.              | 0.5 mm <sup>2</sup> |
| Conductor cross section stranded, with ferrule without plastic sleeve max.              | 2.5 mm <sup>2</sup> |
| Conductor cross section stranded, with ferrule with plastic sleeve min.                 | 0.5 mm <sup>2</sup> |
| Conductor cross section stranded, with ferrule with plastic sleeve max.                 | 1 mm <sup>2</sup>   |
| Conductor cross section AWG/kcmil min.  | 24                  |
| Conductor cross section AWG/kcmil max   | 14                  |
| 2 conductors with same cross section, solid min.  | 0.2 mm <sup>2</sup> |
| 2 conductors with same cross section, solid max.  | 2.5 mm <sup>2</sup> |
| 2 conductors with same cross section, stranded min.                                     | 0.2 mm <sup>2</sup> |
| 2 conductors with same cross section, stranded max.                                     | 2.5 mm <sup>2</sup> |
| 2 conductors with same cross section, stranded, ferrules without plastic sleeve, min.   | 0.5 mm <sup>2</sup> |
| 2 conductors with same cross section, stranded, ferrules without plastic sleeve, max.   | 2.5 mm <sup>2</sup> |
| 2 conductors with same cross section, stranded, TWIN ferrules with plastic sleeve, min. | 0.5 mm <sup>2</sup> |
| 2 conductors with same cross section, stranded, TWIN ferrules with plastic sleeve, max. | 1 mm <sup>2</sup>   |
| Minimum AWG according to UL/CUL   | 24                  |
| Maximum AWG according to UL/CUL   | 14                  |

# Plug - PTDA 2,5/ 8-PH-5,0 - 1725636

## Classifications

### eCl@ss

|            |          |
|------------|----------|
| eCl@ss 4.0 | 272607xx |
| eCl@ss 4.1 | 27141109 |
| eCl@ss 5.0 | 27141190 |
| eCl@ss 5.1 | 27141190 |
| eCl@ss 6.0 | 27261101 |
| eCl@ss 7.0 | 27440401 |
| eCl@ss 8.0 | 27440401 |

### ETIM

|          |          |
|----------|----------|
| ETIM 3.0 | EC001121 |
| ETIM 4.0 | EC002638 |
| ETIM 5.0 | EC002638 |

### UNSPSC

|               |          |
|---------------|----------|
| UNSPSC 6.01   | 30211801 |
| UNSPSC 7.0901 | 39121432 |
| UNSPSC 11     | 34131203 |
| UNSPSC 12.01  | 39121432 |
| UNSPSC 13.2   | 39121432 |

## Approvals

### Approvals

---

#### Approvals

UL Recognized / cUL Recognized / GOST / GOST / cULus Recognized

---

#### Ex Approvals

---

#### Approvals submitted

---

### Approval details

|                                |        |       |
|--------------------------------|--------|-------|
| UL Recognized                  |        |       |
|                                | B      | D     |
| mm <sup>2</sup> /AWG/kcmil     | 24-14  | 24-14 |
| Nominal current I <sub>N</sub> | 13.5 A | 10 A  |

# Plug - PTDA 2,5/ 8-PH-5,0 - 1725636

## Approvals

|                    |       |       |
|--------------------|-------|-------|
|                    | B     | D     |
| Nominal voltage UN | 300 V | 300 V |

cUL Recognized

|                                |        |       |
|--------------------------------|--------|-------|
|                                | B      | D     |
| mm <sup>2</sup> /AWG/kcmil     | 24-14  | 24-14 |
| Nominal current I <sub>N</sub> | 13.5 A | 10 A  |
| Nominal voltage UN             | 300 V  | 300 V |


GOST

GOST


cULus Recognized

## Drawings

Diagram

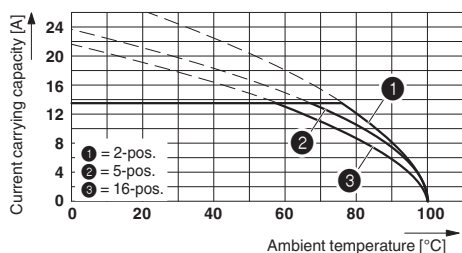

Diagram

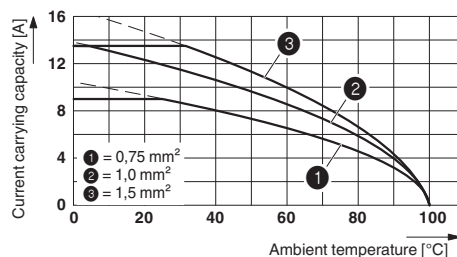

Dimensioned drawing

