



Edge is a range of wiring devices that combine function and style. The design is smooth, clean and the products are very slim – in fact just 1.5mm. An impressive yet subtle statement, available in an unrivalled range of finishes, Edge is the choice in modern, contemporary or traditional interiors where style and detail are the desired effect.

In addition to the wide choice of standard finishes, a custom design service gives designers the ability to match almost any RAL colour required.

With Edge comes unrivalled safety. Utilising MK's unique 3-pin operated safety shutter, that prevents misuse and unsafe access to live circuitry, Edge offers the user the peace of mind and comfort that they have the safest range of wiring devices available installed in their surroundings.

Slim profile frontplates of only 1.5mm with matching flat head screws throughout

A clean and practical range of products that complement the finest interiors

Total safety

Unique 3-pin operated "child resistant shutter system", which is designed to inhibit access to the electricity supply, unless all 3 pins of a standard British 13 Amp plug are in position

Comprehensive range of sockets, switches and modular ancillary products

Mean that whatever the application, the Edge range has a wiring device to suit

Ten standard high quality finishes with the option for custom design service

Allows designers the flexibility to provide the finish of their choice

DOUBLE POLE
SWITCHING

MATCHING METAL
ROCKER SWITCHES

FLATHEAD SCREWS
THROUGHOUT

STYLISH
SLIM-LINE
DESIGN
Frontplate
profile only
1.5mm

UNIQUE 3-PIN "CHILD RESISTANT
SHUTTER SYSTEM"

Designed to inhibit access to the electricity supply, unless all 3 pins of a standard British 13 Amp plug are in position

TEN HIGH QUALITY
FINISHES TO
CHOOSE FROM

OPTIONAL BLACK OR WHITE
INSERTS ON SELECTED FINISHES
Provide impact in any environment

Terminal screws are backed out and captive. Terminals are upwards facing to make installation easier.

Funnel entrance to terminals.

Clear terminal markings for easy identification.

The built-in lock in the Edge 13 amp Lockable Socket ensures that power cannot be provided without key operation making it ideal for communal areas such as hotel lobbies.

ANTIQUE BRONZE

Due to the special processes required to obtain the authentic finish there will be a slight finish variation between ABR products.

Combination plates provide one neat solution to all power, data, TV and satellite outlet requirements.



Switchsocket Outlets

1 GANG DP
DUAL EARTH
13 AMP

1 GANG DP
WITH NEON
DUAL EARTH
13 AMP

NON STANDARD
1 GANG DP
CLEAN EARTH
13 AMP

2 GANG DP
DUAL EARTH
13 AMP

2 GANG DP
CLEAN EARTH
13 AMP

2 GANG DP
WITH NEON
DUAL EARTH
13 AMP

FINISHES

BRUSHED STAINLESS STEEL	☐ STD ☐ OPT	K14357 BSS W K14357 BSS B	K14657 BSS W K14657 BSS B	K14268 BSS W K14268 BSS B	K14347 BSS W K14347 BSS B	K14345 BSS W K14345 BSS B	K14647 BSS W K14647 BSS B
POLISHED BRASS	☐ OPT ☐ STD	K14357 PBR W K14357 PBR B	K14657 PBR W K14657 PBR B	K14268 PBR W K14268 PBR B	K14347 PBR W K14347 PBR B	K14345 PBR W K14345 PBR B	K14647 PBR W K14647 PBR B
SILVER ANODISED ALUMINIUM	☐ STD ☐ OPT	K14357 SAA W K14357 SAA B	K14657 SAA W K14657 SAA B	K14268 SAA W K14268 SAA B	K14347 SAA W K14347 SAA B	K14345 SAA W K14345 SAA B	K14647 SAA W K14647 SAA B
POLISHED CHROME	☐ OPT ☐ STD	K14357 POC W K14357 POC B	K14657 POC W K14657 POC B	K14268 POC W K14268 POC B	K14347 POC W K14347 POC B	K14345 POC W K14345 POC B	K14647 POC W K14647 POC B
WHITE	☐ STD	K14357 WHI W	K14657 WHI W	K14268 WHI W	K14347 WHI W	K14345 WHI W	K14647 WHI W
BLACK ANODISED ALUMINIUM	☐ STD	K14357 BLA B	K14657 BLA B	K14268 BLA B	K14347 BLA B	K14345 BLA B	K14647 BLA B
POLISHED BRONZE	☐ STD	K14357 PBZ B	K14657 PBZ B	K14268 PBZ B	K14347 PBZ B	K14345 PBZ B	K14647 PBZ B
ANTIQUE BRONZE	☐ STD	K14357 ABR B	K14657 ABR B	K14268 ABR B	K14347 ABR B	K14345 ABR B	K14647 ABR B
BRUSHED BRASS	☐ OPT ☐ STD	K14357 BBR W K14357 BBR B	K14657 BBR W K14657 BBR B	K14268 BBR W K14268 BBR B	K14347 BBR W K14347 BBR B	K14345 BBR W K14345 BBR B	K14647 BBR W K14647 BBR B
GOLD PLATED	☐ OPT ☐ STD	K14357 GLD W K14357 GLD B	K14657 GLD W K14657 GLD B	K14268 GLD W K14268 GLD B	K14347 GLD W K14347 GLD B	K14345 GLD W K14345 GLD B	K14647 GLD W K14647 GLD B

W White Inserts
B Black Inserts
☐ STD Standard Black or White
☐ STD White
☐ OPT Option Black or White
☐ OPT White

MOUNTING BOXES
 FLUSH 35mm: 866 ZIC
 FLUSH 46mm: 877 ZIC
 (for extra wiring space)
 DIMENSIONS:
 86 x 86mm
 FIXING CENTRES:
 60.3mm
 BS.1363 Pt. 2: 1995

MOUNTING BOXES
 FLUSH 35mm: 866 ZIC
 FLUSH 46mm: 877 ZIC
 (for extra wiring space)
 DIMENSIONS:
 86 x 86mm
 FIXING CENTRES:
 60.3mm
 BS.1363 Pt. 2: 1995
 Neon is only available
 in white or black rocker.

MOUNTING BOXES
 FLUSH 35mm: 866 ZIC
 FLUSH 46mm: 877 ZIC
 (for extra wiring space)
 DIMENSIONS:
 86 x 86mm
 FIXING CENTRES:
 60.3mm
 BS.1363 Pt. 2: 1995
 (where relevant)
 These products are
 provided with facilities
 for 'clean earth'
 connections and are
 suitable for non-
 standard plugs with 'T'
 shaped earth pins.

MOUNTING BOXES
 FLUSH 35mm: 886 ZIC
 FLUSH 47mm: 878 ZIC
 (for extra wiring space)
 DIMENSIONS:
 86 x 146mm
 FIXING CENTRES:
 120.6mm
 BS.1363 Pt. 2: 1995

MOUNTING BOXES
 FLUSH 35mm: 886 ZIC
 FLUSH 47mm: 878 ZIC
 (for extra wiring space)
 DIMENSIONS:
 86 x 146mm
 FIXING CENTRES:
 120.6mm
 BS.1363 Pt. 2: 1995
 (where relevant)

MOUNTING BOXES
 FLUSH 35mm: 886 ZIC
 FLUSH 47mm: 878 ZIC
 (for extra wiring space)
 DIMENSIONS:
 86 x 146mm
 FIXING CENTRES:
 120.6mm
 BS.1363 Pt. 2: 1995
 Neon is only available
 in white or black rocker.

LEAD TIMES
 Please contact our Customer
 Services Department on:
 01268 563000

Dual Earth
 Fitted with two earth terminals to provide a double earth
 facility for use when installations are to comply with
 Section 607 of BS.7671 IEE Wiring Regulations

Dual Earth (see note box)

Dual Earth (see note box)

TECHNICAL HOTLINE +44 (0)1268 563720

DECORATIVE

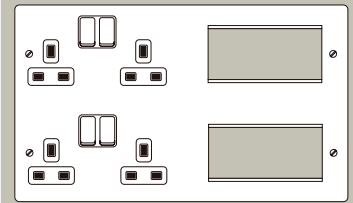
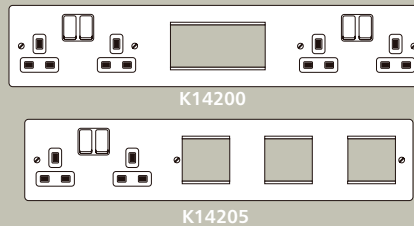


LOCKABLE
1 GANG DP
DUAL EARTH
13 AMP

NON STANDARD
2 GANG DP
CLEAN EARTH
13 AMP

1 GANG DP
ROUND PIN
15 AMP

IN-LINE COMBINATION PLATES
4 GANG DP DUAL EARTH 13A EURO 4
MODULE 100 X 50mm
2 GANG DP DUAL EARTH 13A EURO 6
MODULE 50 X 50mm (x3)

STACKED COMBINATION PLATE
4 GANG DP DUAL EARTH 13A
EURO 8 MODULE
100 x 50mm (x2)



K14355 BSS W
K14355 BSS **B**

K14246 BSS W
K14246 BSS **B**

K14383 BSS W
K14383 BSS **B**

K14200 BSS W
K14200 BSS **B**

K14205 BSS W
K14205 BSS **B**

K14100 BSS W
K14100 BSS **B**

K14355 PBR W
K14355 PBR B

K14246 PBR W
K14246 PBR B

K14383 PBR W
K14383 PBR B

K14200 PBR W
K14200 PBR B

K14205 PBR W
K14205 PBR B

K14100 PBR W
K14100 PBR B

K14355 SAA W
K14355 SAA **B**

K14246 SAA W
K14246 SAA **B**

K14383 SAA W
K14383 SAA **B**

Not available
in this finish

Not available
in this finish

Not available
in this finish

K14355 POC W
K14355 POC B

K14246 POC W
K14246 POC B

K14383 POC W
K14383 POC B

K14200 POC W
K14200 POC B

K14205 POC W
K14205 POC B

K14100 POC W
K14100 POC B

K14355 WHI W

K14246 WHI W

K14383 WHI W

K14200 WHI W

K14205 WHI W

K14100 WHI W

K14355 BLA B

K14246 BLA B

K14383 BLA B

Not available
in this finish

Not available
in this finish

Not available
in this finish

K14355 PBZ B

K14246 PBZ B

K14383 PBZ B

K14200 PBZ B

K14205 PBZ B

K14100 PBZ B

K14355 ABR B

K14246 ABR B

K14383 ABR B

K14200 ABR B

K14205 ABR B

K14100 ABR B

K14355 BBR W
K14355 BBR B

K14246 BBR W
K14246 BBR B

K14383 BBR W
K14383 BBR B

K14200 BBR W
K14200 BBR B

K14205 BBR W
K14205 BBR B

K14100 BBR W
K14100 BBR B

K14355 GLD W
K14355 GLD B

K14246 GLD W
K14246 GLD B

K14383 GLD W
K14383 GLD B

K14200 GLD W
K14200 GLD B

K14205 GLD W
K14205 GLD B

K14100 GLD W
K14100 GLD B

MOUNTING BOX
FLUSH 47mm: 878 ZIC
DIMENSIONS
86 x 146mm
FIXING CENTRES
120.6mm
BS.1363 Pt. 2: 1995

MOUNTING BOXES
FLUSH 35mm: 886 ZIC
FLUSH 47mm: 878 ZIC
(for extra wiring space)
DIMENSIONS:
86 x 146mm
FIXING CENTRES:
120.6mm
BS.1363 Pt. 2: 1995
(where relevant)
These products are
provided with facilities for
'clean earth' connections,
and are suitable for non-
standard plugs with T
shaped earth pins. Refer
to non-standard plugs
page 170.

MOUNTING BOXES
FLUSH 35mm: 866
ZIC
FLUSH 46mm: 877
ZIC
(for extra wiring
space)
DIMENSIONS:
86 x 86mm
FIXING CENTRES:
60.3mm
BS.546: 1950

MOUNTING BOXES* (for K14200)
FLUSH 35mm: K14201
FLUSH 47mm: K14202
DIMENSIONS:
86 x 442.8mm
FIXING CENTRES: 417.4mm
BS.1363 Pt. 2: 1995

* See page 50 for box dimensions

MOUNTING BOXES* (for K14205)
FLUSH 35mm: K14206
FLUSH 47mm: K14207
DIMENSIONS:
86 x 407.9mm
FIXING CENTRES: 382.5mm
BS.1363 Pt. 2: 1995

* See page 50 for box dimensions

MOUNTING BOXES**
FLUSH 35mm: K14101
FLUSH 47mm: K14102
DIMENSIONS:
173 x 293.6mm
FIXING CENTRES: 268.2mm / 87.3mm
BS.1363 Pt. 2: 1995

** See page 51 for box dimensions

Dual Earth (see note box)

Dual Earth (see note box)

Dual Earth (see note box)

Mains operated products and extra low voltage modules must not be installed within the same frontplate aperture.
Refer to BS. 7671 IEE Wiring Regulations for details.

Dual Earth (see note box)

Socket Outlets

1 GANG
DUAL EARTH
13 AMP





2 GANG
DUAL EARTH
13 AMP

NON STANDARD
2 GANG
CLEAN EARTH
13 AMP

1 GANG
2 AMP

1 GANG
5 AMP

FLOOR SOCKET
1 GANG
13 AMP



FINISHES

BRUSHED
STAINLESS STEEL

STD
OPT

K14780 BSS W
K14780 BSS B

K14781 BSS W
K14781 BSS B

K14239 BSS W
K14239 BSS B

K14380 BSS W
K14380 BSS B

K14381 BSS W
K14381 BSS B

K14740 BSS W
K14740 BSS B

POLISHED BRASS

OPT
STD

K14780 PBR W
K14780 PBR B

K14781 PBR W
K14781 PBR B

K14239 PBR W
K14239 PBR B

K14380 PBR W
K14380 PBR B

K14381 PBR W
K14381 PBR B

K14740 PBR W
K14740 PBR B

SILVER ANODISED
ALUMINIUM

STD
OPT

K14780 SAA W
K14780 SAA B

K14781 SAA W
K14781 SAA B

K14239 SAA W
K14239 SAA B

K14380 SAA W
K14380 SAA B

K14381 SAA W
K14381 SAA B

K14740 SAA W*
K14740 SAA B*

POLISHED
CHROME

OPT
STD

K14780 POC W
K14780 POC B

K14781 POC W
K14781 POC B

K14239 POC W
K14239 POC B

K14380 POC W
K14380 POC B

K14381 POC W
K14381 POC B

K14740 POC W
K14740 POC B

WHITE

STD

K14780 WHI W

K14781 WHI W

K14239 WHI W

K14380 WHI W

K14381 WHI W

K14740 WHI W

BLACK ANODISED
ALUMINIUM

STD

K14780 BLA B

K14781 BLA B

K14239 BLA B

K14380 BLA B

K14381 BLA B

K14740 BLA B**

POLISHED BRONZE

STD

K14780 PBZ B

K14781 PBZ B

K14239 PBZ B

K14380 PBZ B

K14381 PBZ B

K14740 PBZ B

ANTIQUE BRONZE

STD

K14780 ABR B

K14781 ABR B

K14239 ABR B

K14380 ABR B

K14381 ABR B

K14740 ABR B

BRUSHED BRASS

OPT
STD

K14780 BBR W
K14780 BBR B

K14781 BBR W
K14781 BBR B

K14239 BBR W
K14239 BBR B

K14380 BBR W
K14380 BBR B

K14381 BBR W
K14381 BBR B

K14740 BBR W
K14740 BBR B

GOLD PLATED

OPT
STD

K14780 GLD W
K14780 GLD B

K14781 GLD W
K14781 GLD B

K14239 GLD W
K14239 GLD B

K14380 GLD W
K14380 GLD B

K14381 GLD W
K14381 GLD B

K14740 GLD W
K14740 GLD B

W White Inserts
B Black Inserts
STD Standard Black or
STD White
OPT Option Black or
OPT White

MOUNTING BOXES

FLUSH 35mm: 866 ZIC
FLUSH 46mm: 877 ZIC
(for extra wiring space)

DIMENSIONS:
86 x 86mm

FIXING CENTRES:
60.3mm

BS.1363 Pt. 2: 1995

MOUNTING BOXES

FLUSH 35mm: 886 ZIC
FLUSH 47mm: 878 ZIC
(for extra wiring space)

DIMENSIONS:
86 x 146mm

FIXING CENTRES:
120.6mm

BS.1363 Pt. 2: 1995

MOUNTING BOXES

FLUSH 35mm: 886 ZIC
FLUSH 47mm: 878 ZIC
(for extra wiring space)

DIMENSIONS:
86 x 146mm

FIXING CENTRES:
120.6mm

BS.1363 Pt. 2: 1995
(where relevant)

These products are provided with facilities for 'clean earth' connections, and are suitable for non-standard plugs with T shaped earth pins. Refer to non-standard plugs page 170.

MOUNTING BOXES

FLUSH 25mm: 861 ZIC
FLUSH 35mm: 866 ZIC
(for extra wiring space)

DIMENSIONS:
86 x 86mm

FIXING CENTRES:
60.3mm

BS.546: 1950

MOUNTING BOXES

FLUSH 35mm: 866 ZIC
FLUSH 46mm: 877 ZIC
(for extra wiring space)

DIMENSIONS:
86 x 86mm

FIXING CENTRES:
60.3mm

BS.546: 1950

MOUNTING BOXES

FLUSH 35mm: 866 ZIC
FLUSH 46mm: 877 ZIC
(for extra wiring space)

Rotary operated shutter.

*Finish same as BSS—Cover plate not aluminium.

**Finish not anodised.

DIMENSIONS:
102 x 86mm

FIXING CENTRES:
60.3mm

BS.1363 Pt. 2: 1995

LEAD TIMES
Please contact our Customer Services Department on: 01268 563000

Dual Earth (see note box)

Dual Earth (see note box)

Also available in German
IG A 2P+E version

TECHNICAL HOTLINE +44 (0)1268 563720

DECORATIVE

Shaver Supply Units

DUAL VOLTAGE 115/230V OUTPUT 220/240V 50/60HZ INPUT	DUAL VOLTAGE 115/230V OUTPUT 120/130V 50/60HZ INPUT
(NON UK)	(NON UK)


FLOOR SOCKET
2 GANG
13 AMP

GERMAN
2P+E
1 GANG
16 AMP
(NON UK)

UNIVERSAL
SOCKET
1 GANG
16 AMP
(NON UK)

AMERICAN
1 GANG
15 AMP
(NON UK)



AMERICAN
2 GANG
15 AMP
(NON UK)



MODULAR
Order plate and insert



MODULAR
Order plate and insert



K14742 BSS W
K14742 BSS **B**

K14182 BSS
K5831 WHI
K5831 BLK

K14331 BSS
K4901 WHI
K4901 BLK

K14281 BSS W
K14281 BSS **B**

K14282 BSS W
K14282 BSS **B**

K14709 BSS W
K14709 BSS **B**

K14710 BSS W
K14710 BSS **B**

K14742 PBR W
K14742 PBR B

K14182 PBR
K5831 WHI
K5831 BLK

K14331 PBR
K4901 WHI
K4901 BLK

K14281 PBR W
K14281 PBR B

K14282 PBR W
K14282 PBR B

K14709 PBR W
K14709 PBR B

K14710 PBR W
K14710 PBR B

K14742 SAA W*
K14742 SAA **B***

K14182 SAA
K5831 WHI
K5831 BLK

K14331 SAA
K4901 WHI
K4901 BLK

K14281 SAA W
K14281 SAA **B**

K14282 SAA W
K14282 SAA **B**

K14709 SAA W
K14709 SAA **B**

K14710 SAA W
K14710 SAA **B**

K14742 POC W
K14742 POC B

K14182 POC
K5831 WHI
K5831 BLK

K14331 POC
K4901 WHI
K4901 BLK

K14281 POC W
K14281 POC B

K14282 POC W
K14282 POC B

K14709 POC W
K14709 POC B

K14710 POC W
K14710 POC B

K14742 WHI W
K14742 WHI **B**

K14182 WHI
K5831 WHI
K5831 BLK

K14331 WHI
K4901 WHI
K4901 BLK

K14281 WHI W
K14281 WHI **B**

K14282 WHI W
K14282 WHI **B**

K14709 WHI W
K14709 WHI **B**

K14710 WHI W
K14710 WHI **B**

K14742 BLA B**
K14742 BLA **B**

K14182 BLA
K5831 WHI
K5831 BLK

K14331 BLA
K4901 WHI
K4901 BLK

K14281 BLA B
K14281 BLA **B**

K14282 BLA B
K14282 BLA **B**

K14709 BLA B
K14709 BLA **B**

K14710 BLA B
K14710 BLA **B**

K14742 PBZ B
K14742 PBZ **B**

K14182 PBZ
K5831 WHI
K5831 BLK

K14331 PBZ
K4901 WHI
K4901 BLK

K14281 PBZ B
K14281 PBZ **B**

K14282 PBZ B
K14282 PBZ **B**

K14709 PBZ B
K14709 PBZ **B**

K14710 PBZ B
K14710 PBZ **B**

K14742 ABR B
K14742 ABR **B**

K14182 ABR
K5831 WHI
K5831 BLK

K14331 ABR
K4901 WHI
K4901 BLK

K14281 ABR B
K14281 ABR **B**

K14282 ABR B
K14282 ABR **B**

K14709 ABR B
K14709 ABR **B**

K14710 ABR B
K14710 ABR **B**

K14742 BBR W
K14742 BBR B

K14182 BBR
K5831 WHI
K5831 BLK

K14331 BBR
K4901 WHI
K4901 BLK

K14281 BBR W
K14281 BBR B

K14282 BBR W
K14282 BBR B

K14709 BBR W
K14709 BBR B

K14710 BBR W
K14710 BBR B

K14742 GLD W
K14742 GLD B

K14182 GLD
K5831 WHI
K5831 BLK

K14331 GLD
K4901 WHI
K4901 BLK

K14281 GLD W
K14281 GLD B

K14282 GLD W
K14282 GLD B

K14709 GLD W
K14709 GLD B

K14710 GLD W
K14710 GLD B

MOUNTING BOXES

FLUSH 35mm: 886 ZIC
FLUSH 47mm: 878 ZIC
(for extra wiring space)

Rotary operated shutter.

*Finish same as BSS—
Cover plate not
aluminium.

**Finish not anodised.

DIMENSIONS:
102 x 146mm

FIXING CENTRES:
120.6mm

BS.1363 Pt. 2: 1995

MOUNTING BOXES

FLUSH 46mm: 877 ZIC
DIMENSIONS: 86 x 86mm
IEC 60884-1: 2002

This is a modular product.
The front plate (K14182)
and socket (K5831) need to
be ordered separately.
Add appropriate suffix to
the list number.

MOUNTING BOXES

FLUSH 35mm: 866 ZIC
FLUSH 46mm: 877 ZIC
(for extra wiring space)

DIMENSIONS:
86 x 86mm
BS.5733: 1995
Grid Plus frontplates,
supplied with mounting
frame. The Universal Socket
does not incorporate an
earth contact. Appliances
needing earth connection
(class 1 equipment) must
NOT be used with this
socket. The socket is
intended for use with BS,
USA and CEE plugs.

MOUNTING BOXES

FLUSH 35mm: 866 ZIC
FLUSH 46mm: 877 ZIC
(for extra wiring space)

DIMENSIONS:
86 x 86mm
FIXING CENTRES:
60.3mm
SSA.444: 1985

MOUNTING BOXES

FLUSH 35mm: 886 ZIC
FLUSH 47mm: 878 ZIC
(for extra wiring space)

DIMENSIONS:
86 x 146mm
FIXING CENTRES:
120.6mm
SSA.444: 1985

MOUNTING BOXES

FLUSH: 878 ZIC

This design incorporates a double wound isolating
transformer rated 20VA at 230 or 115 volts and meets
BS EN 61558-2-5: 1998, making it safe for use in
bathrooms.

Insertion of a shaver plug automatically switches on
by energising the primary side of the isolating
transformer — removal automatically switches off. The
transformer is protected against overload by an
automatic solid state overload device with automatic
resetting.

Front plate 7mm thick to allow fixing to 47mm deep
box.

DIMENSIONS: 146 x 86mm

FIXING CENTRES: 120.6mm

BS EN 61558-2-5: 1998

Connection Units Switched

DP
13 AMP

DP
WITH NEON*
13 AMP

DP
WITH FLEX
OUTLET
13 AMP

DP
WITH NEON*
& FLEX OUTLET
13 AMP

Connection Units Unswitched

13 AMP

WITH NEON
13 AMP

FINISHES

BRUSHED STAINLESS STEEL	☐ STD ☐ OPT	K14941 BSS W K14941 BSS B	K14961 BSS W K14961 BSS B	K14931 BSS W K14931 BSS B	K14971 BSS W K14971 BSS B	K14948 BSS W K14948 BSS B	K14958 BSS W K14958 BSS B
POLISHED BRASS	☐ OPT ☐ STD	K14941 PBR W K14941 PBR B	K14961 PBR W K14961 PBR B	K14931 PBR W K14931 PBR B	K14971 PBR W K14971 PBR B	K14948 PBR W K14948 PBR B	K14958 PBR W K14958 PBR B
SILVER ANODISED ALUMINIUM	☐ STD ☐ OPT	K14941 SAA W K14941 SAA B	K14961 SAA W K14961 SAA B	K14931 SAA W K14931 SAA B	K14971 SAA W K14971 SAA B	K14948 SAA W K14948 SAA B	K14958 SAA W K14958 SAA B
POLISHED CHROME	☐ OPT ☐ STD	K14941 POC W K14941 POC B	K14961 POC W K14961 POC B	K14931 POC W K14931 POC B	K14971 POC W K14971 POC B	K14948 POC W K14948 POC B	K14958 POC W K14958 POC B
WHITE	☐ STD	K14941 WHI W	K14961 WHI W	K14931 WHI W	K14971 WHI W	K14948 WHI W	K14958 WHI W
BLACK ANODISED ALUMINIUM	☐ STD	K14941 BLA B	K14961 BLA B	K14931 BLA B	K14971 BLA B	K14948 BLA B	K14958 BLA B
POLISHED BRONZE	☐ STD	K14941 PBZ B	K14961 PBZ B	K14931 PBZ B	K14971 PBZ B	K14948 PBZ B	K14958 PBZ B
ANTIQUE BRONZE	☐ STD	K14941 ABR B	K14961 ABR B	K14931 ABR B	K14971 ABR B	K14948 ABR B	K14958 ABR B
BRUSHED BRASS	☐ OPT ☐ STD	K14941 BBR W K14941 BBR B	K14961 BBR W K14961 BBR B	K14931 BBR W K14931 BBR B	K14971 BBR W K14971 BBR B	K14948 BBR W K14948 BBR B	K14958 BBR W K14958 BBR B
GOLD PLATED	☐ OPT ☐ STD	K14941 GLD W K14941 GLD B	K14961 GLD W K14961 GLD B	K14931 GLD W K14931 GLD B	K14971 GLD W K14971 GLD B	K14948 GLD W K14948 GLD B	K14958 GLD W K14958 GLD B

W White Inserts
B Black Inserts
☐ STD Standard Black or
☐ STD White
☐ OPT Option Black or
☐ OPT White

*NOTE: Neon is only available in white or black rocker.

LEAD TIMES
 Please contact our Customer Services Department on: 01268 563000

MOUNTING BOXES
 FLUSH 35mm: 866 ZIC
 FLUSH 46mm: 877 ZIC
 (for extra wiring space)

All connection units are fitted with a 13amp fuse (to BS1362)

TERMINAL CAPACITY
 2 x 6mm² stranded (max)

DIMENSIONS:
 86 x 86mm

FIXING CENTRES:
 60.3mm

BS. 1363 Pt. 4: 1995

MOUNTING BOXES
 FLUSH 35mm: 866 ZIC
 FLUSH 46mm: 877 ZIC
 (for extra wiring space)

All connection units are fitted with a 13amp fuse (to BS1362)

TERMINAL CAPACITY
 2 x 6mm² stranded (max)

DIMENSIONS:
 86 x 86mm

FIXING CENTRES:
 60.3mm

BS. 1363 Pt. 4: 1995

MOUNTING BOXES
 FLUSH 35mm: 866 ZIC
 FLUSH 46mm: 877 ZIC
 (for extra wiring space)

All connection units are fitted with a 13amp fuse (to BS1362)

TERMINAL CAPACITY
 2 x 6mm² stranded (max)

DIMENSIONS:
 86 x 86mm

FIXING CENTRES:
 60.3mm

BS. 1363 Pt. 4: 1995

MOUNTING BOXES
 FLUSH 35mm: 866 ZIC
 FLUSH 46mm: 877 ZIC
 (for extra wiring space)

All connection units are fitted with a 13amp fuse (to BS1362)

TERMINAL CAPACITY
 2 x 6mm² stranded (max)

DIMENSIONS:
 86 x 86mm

FIXING CENTRES:
 60.3mm

BS. 1363 Pt. 4: 1995

MOUNTING BOXES
 FLUSH 35mm: 866 ZIC
 FLUSH 46mm: 877 ZIC
 (for extra wiring space)

All connection units are fitted with a 13amp fuse (to BS1362)

TERMINAL CAPACITY
 2 x 6mm² stranded (max)

DIMENSIONS:
 86 x 86mm

FIXING CENTRES:
 60.3mm

BS. 1363 Pt. 4: 1995

MOUNTING BOXES
 FLUSH 35mm: 866 ZIC
 FLUSH 46mm: 877 ZIC
 (for extra wiring space)

All connection units are fitted with a 13amp fuse (to BS1362)

TERMINAL CAPACITY
 2 x 6mm² stranded (max)

DIMENSIONS:
 86 x 86mm







FIXING CENTRES:
 60.3mm

BS. 1363 Pt. 4: 1995

TECHNICAL HOTLINE +44 (0)1268 563720

DECORATIVE

Switches

Cooker
Switches3 Pole Fan
IsolatorWITH FLEX
OUTLET
13 AMPWITH NEON &
FLEX OUTLET
13 AMP1 GANG SP
2 WAY
20 AMP2 GANG SP
2 WAY
20 AMP1 GANG DP
WITH NEON
32 AMP1 GANG DP
WITH NEON
45 AMP45 AMP DP
MAIN SWITCH
AND 13 AMP
SWITCH SOCKET
OUTLET WITH
NEONS

K14989 BSS W K14989 BSS B	K14978 BSS W K14978 BSS B	K14371 BSS W K14371 BSS B	K14372 BSS W K14372 BSS B	K14305 BSS W K14305 BSS B	K14336 BSS W K14336 BSS B	K14361 BSS W K14361 BSS B	K14859 BSS W K14859 BSS B
K14989 PBR W K14989 PBR B	K14978 PBR W K14978 PBR B	K14371 PBR W K14371 PBR B	K14372 PBR W K14372 PBR B	K14305 PBR W K14305 PBR B	K14336 PBR W K14336 PBR B	K14361 PBR W K14361 PBR B	K14859 PBR W K14859 PBR B
K14989 SAA W K14989 SAA B	K14978 SAA W K14978 SAA B	K14371 SAA W K14371 SAA B	K14372 SAA W K14372 SAA B	K14305 SAA W K14305 SAA B	K14336 SAA W K14336 SAA B	K14361 SAA W K14361 SAA B	K14859 SAA W K14859 SAA B
K14989 POC W K14989 POC B	K14978 POC W K14978 POC B	K14371 POC W K14371 POC B	K14372 POC W K14372 POC B	K14305 POC W K14305 POC B	K14336 POC W K14336 POC B	K14361 POC W K14361 POC B	K14859 POC W K14859 POC B
K14989 WHI W	K14978 WHI W	K14371 WHI W	K14372 WHI W	K14305 WHI W	K14336 WHI W	K14361 WHI W	K14859 WHI W
K14989 BLA B	K14978 BLA B	K14371 BLA B	K14372 BLA B	K14305 BLA B	K14336 BLA B	K14361 BLA B	K14859 BLA B
K14989 PBZ B	K14978 PBZ B	K14371 PBZ B	K14372 PBZ B	K14305 PBZ B	K14336 PBZ B	K14361 PBZ B	K14859 PBZ B
K14989 ABR B	K14978 ABR B	K14371 ABR B	K14372 ABR B	K14305 ABR B	K14336 ABR B	K14361 ABR B	K14859 ABR B
K14989 BBR W K14989 BBR B	K14978 BBR W K14978 BBR B	K14371 BBR W K14371 BBR B	K14372 BBR W K14372 BBR B	K14305 BBR W K14305 BBR B	K14336 BBR W K14336 BBR B	K14361 BBR W K14361 BBR B	K14859 BBR W K14859 BBR B
K14989 GLD W K14989 GLD B	K14978 GLD W K14978 GLD B	K14371 GLD W K14371 GLD B	K14372 GLD W K14372 GLD B	K14305 GLD W K14305 GLD B	K14336 GLD W K14336 GLD B	K14361 GLD W K14361 GLD B	K14859 GLD W K14859 GLD B

MOUNTING BOXES
FLUSH 35mm: 866 ZIC
FLUSH 46mm: 877 ZIC
(for extra wiring space)
All connection units
are fitted with a
13amp fuse (to
BS1362)
TERMINAL CAPACITY
2 x 6mm² stranded
(max)
DIMENSIONS:
86 x 86mm
FIXING CENTRES:
60.3mm
BS. 1363 Pt. 4: 1995

MOUNTING BOXES
FLUSH 35mm: 866 ZIC
FLUSH 46mm: 877 ZIC
(for extra wiring space)
All connection units
are fitted with a 13amp
fuse (to BS1362)
TERMINAL CAPACITY
2 x 6mm² stranded
(max)
DIMENSIONS:
86 x 86mm
FIXING CENTRES:
60.3mm
BS. 1363 Pt. 4: 1995

MOUNTING BOXES
FLUSH
861 ZIC
TERMINAL CAPACITY
2 x 6mm² Stranded
(max)
DIMENSIONS:
86 x 86mm
FIXING CENTRES:
60.3mm
BS. EN 60669-1: 2000
These switches do not
have to be derated
when used with
fluorescent or
inductive loads

MOUNTING BOXES
FLUSH
861 ZIC
TERMINAL CAPACITY
2 x 6mm² Stranded
(max)
DIMENSIONS:
86 x 86mm
FIXING CENTRES:
60.3mm
BS. EN 60669-1: 2000
These switches do not
have to be derated
when used with
fluorescent or
inductive loads

MOUNTING BOXES
FLUSH
866 ZIC
DIMENSIONS:
86 x 86mm
FIXING CENTRES:
60.3mm
BS. EN 60669-1: 2000
These switches do not
have to be derated
when used with
fluorescent or
inductive loads

MOUNTING BOXES
FLUSH
878 ZIC
DIMENSIONS:
86 x 146mm
FIXING CENTRES:
120.6mm
BS. 3676 Pt. 1: 1989
These switches do not
have to be derated
when used with
fluorescent or
inductive loads

MOUNTING BOXES
FLUSH: 878 ZIC
45 AMP
DP MAIN SWITCH
AND 13 AMP
SWITCH/OUTLET
WITH NEONS
(Up to 10mm² conductor)
Rotary operated shutter
DIMENSIONS:
86 x 146mm
FIXING CENTRES:
120.6mm
BS. 4177: 1992
When using 10mm cable,
the box must be installed
6mm to 10mm sub flush
to the wall surface

MOUNTING BOXES
FLUSH
877 ZIC
DIMENSIONS:
86 x 186mm
FIXING CENTRES:
60.3mm
BS. EN 60947-3:1992
Mounting box must be
installed 6mm to
10mm sub flush to the
wall surface

Grid Plus Modular Frontplates

Supplied with Grids

1 MODULE

2 MODULE

3 MODULE

4 MODULE

6 MODULE

8 MODULE

FINISHES

BRUSHED
STAINLESS STEEL

K14331 BSS

K14332 BSS

K14333 BSS

K14334 BSS

K14346 BSS

K14348 BSS

POLISHED BRASS

K14331 PBR

K14332 PBR

K14333 PBR

K14334 PBR

K14346 PBR

K14348 PBR

SILVER ANODISED
ALUMINIUM

K14331 SAA

K14332 SAA

K14333 SAA

K14334 SAA

K14346 SAA

K14348 SAA

POLISHED
CHROME

K14331 POC

K14332 POC

K14333 POC

K14334 POC

K14346 POC

K14348 POC

WHITE

K14331 WHI

K14332 WHI

K14333 WHI

K14334 WHI

K14346 WHI

K14348 WHI

BLACK ANODISED
ALUMINIUM

K14331 BLA

K14332 BLA

K14333 BLA

K14334 BLA

K14346 BLA

K14348 BLA

POLISHED BRONZE

K14331 PBZ

K14332 PBZ

K14333 PBZ

K14334 PBZ

K14346 PBZ

K14348 PBZ

ANTIQUE BRONZE

K14331 ABR

K14332 ABR

K14333 ABR

K14334 ABR

K14346 ABR

K14348 ABR

BRUSHED BRASS

K14331 BBR

K14332 BBR

K14333 BBR

K14334 BBR

K14346 BBR

K14348 BBR

GOLD PLATED

K14331 GLD

K14332 GLD

K14333 GLD

K14334 GLD

K14346 GLD

K14348 GLD

MOUNTING BOX

FLUSH:
891 ALMDIMENSIONS:
86 x 86mm

BS. 5733: 1995

MOUNTING BOX

FLUSH:
891 ALMDIMENSIONS:
86 x 86mm

BS. 5733: 1995

MOUNTING BOX

FLUSH:
892 ALMDIMENSIONS:
86 x 146mm

BS. 5733: 1995

MOUNTING BOX

FLUSH:
892 ALMDIMENSIONS:
86 x 146mm

BS. 5733: 1995

MOUNTING BOX

FLUSH:
893 ALMDIMENSIONS:
146 x 146mm

BS. 5733: 1995

MOUNTING BOX

FLUSH:
893 ALMDIMENSIONS:
146 x 146mm

BS. 5733: 1995

LEAD TIMES

Please contact our Customer
Services Department on:
01268 563000

Triple Pole & Neutral Switch






9 MODULE

12 MODULE

18 MODULE

24 MODULE

1 MODULE
ARCHITRAVE

2 MODULE
ARCHITRAVE

K14349 BSS
K14352 BSS
K14358 BSS
K14354 BSS
K14401 BSS
K14402 BSS
K14114 BSS
K14349 PBR
K14352 PBR
K14358 PBR
K14354 PBR
K14401 PBR
K14402 PBR
K14114 PBR
K14349 SAA
K14352 SAA
K14358 SAA
K14354 SAA
K14401 SAA
K14402 SAA
K14114 SAA
K14349 POC
K14352 POC
K14358 POC
K14354 POC
K14401 POC
K14402 POC
K14114 POC
K14349 WHI
K14352 WHI
K14358 WHI
K14354 WHI
K14401 WHI
K14402 WHI
K14114 WHI
K14349 BLA
K14352 BLA
K14358 BLA
K14354 BLA
K14401 BLA
K14402 BLA
K14114 BLA
K14349 PBZ
K14352 PBZ
K14358 PBZ
K14354 PBZ
K14401 PBZ
K14402 PBZ
K14114 PBZ
K14349 ABR
K14352 ABR
K14358 ABR
K14354 ABR
K14401 ABR
K14402 ABR
K14114 ABR
K14349 BBR
K14352 BBR
K14358 BBR
K14354 BBR
K14401 BBR
K14402 BBR
K14114 BBR
K14349 GLD
K14352 GLD
K14358 GLD
K14354 GLD
K14401 GLD
K14402 GLD
K14114 GLD

MOUNTING BOX

FLUSH:
895 ALM

DIMENSIONS:
206 x 146mm

BS. 5733: 1995

MOUNTING BOX

FLUSH:
895 ALM

DIMENSIONS:
206 x 146mm

BS. 5733: 1995

MOUNTING BOX

FLUSH:
898 ALM

DIMENSIONS:
206 x 206mm

BS. 5733: 1995

MOUNTING BOX

FLUSH:
900 ALM

DIMENSIONS:
207 x 267mm

BS. 5733: 1995

MOUNTING BOX

FLUSH:
3891 ZIC

MOUNTING FRAME
K14801

DIMENSIONS:
38.8 x 91.75

BS. 5733: 1995

MOUNTING BOX

FLUSH:
3892 ZIC

MOUNTING FRAME
K14802

DIMENSIONS:
38.8 x 150.65

BS. 5733: 1995

MOUNTING BOXES

FLUSH
5268 ALM
(Mounting box should
be mounted 6 to
10mm sub-flush to the
wall)

DIMENSIONS:
203 x 140mm

TERMINAL CAPACITY:
16mm² conductors

BS.EN 60947-3: 1992

Toggle Switch Frontplates

Supplied with Grids

1 MODULE

2 MODULE

3 MODULE

4 MODULE

Toggle Switch Modules

20 AMP
SP 1 WAY20 AMP
SP 2 WAY

FINISHES

BRUSHED STAINLESS STEEL	K14431 BSS	K14432 BSS	K14433 BSS	K14434 BSS	K14891 BSS	K14892 BSS
POLISHED BRASS	K14431 PBR	K14432 PBR	K14433 PBR	K14434 PBR	K14891 PBR	K14892 PBR
SILVER ANODISED ALUMINIUM	K14431 SAA	K14432 SAA	K14433 SAA	K14434 SAA	K14891 SAA	K14892 SAA
POLISHED CHROME	K14431 POC	K14432 POC	K14433 POC	K14434 POC	K14891 POC	K14892 POC
WHITE	K14431 WHI	K14432 WHI	K14433 WHI	K14434 WHI	K14891 WHI	K14892 WHI
BLACK ANODISED ALUMINIUM	K14431 BLA	K14432 BLA	K14433 BLA	K14434 BLA	K14891 BLA	K14892 BLA
POLISHED BRONZE	K14431 PBZ	K14432 PBZ	K14433 PBZ	K14434 PBZ	K14891 PBZ	K14892 PBZ
ANTIQUE BRONZE	K14431 ABR	K14432 ABR	K14433 ABR	K14434 ABR	K14891 ABR	K14892 ABR
BRUSHED BRASS	K14431 BBR	K14432 BBR	K14433 BBR	K14434 BBR	K14891 BBR	K14892 BBR
GOLD PLATED	K14431 GLD	K14432 GLD	K14433 GLD	K14434 GLD	K14891 GLD	K14892 GLD

MOUNTING BOX
FLUSH:
891 ALM
DIMENSIONS:
86 x 86mm
BS.3676 Pt.1: 1989

MOUNTING BOX
FLUSH:
891 ALM
DIMENSIONS:
86 x 86mm
BS.3676 Pt.1: 1989

MOUNTING BOX
FLUSH:
892 ALM
DIMENSIONS:
86 x 146mm
BS.3676 Pt.1: 1989

MOUNTING BOX
FLUSH:
892 ALM
DIMENSIONS:
86 x 146mm
BS.3676 Pt.1: 1989

These switches do NOT have to be derated when used with fluorescent and inductive loads.
BS.3676 Pt.1: 1989

These switches do NOT have to be derated when used with fluorescent and inductive loads.
BS.3676 Pt.1: 1989



TECHNICAL HOTLINE +44 (0)1268 563720

DECORATIVE

20 AMP
DP 1 WAY

20 AMP
INTERMEDIATE



K14896 BSS	K14893 BSS	
K14896 PBR	K14893 PBR	
K14896 SAA	K14893 SAA	
K14896 POC	K14893 POC	
K14896 WHI	K14893 WHI	
K14896 BLA	K14893 BLA	
K14896 PBZ	K14893 PBZ	
K14896 ABR	K14893 ABR	
K14896 BBR	K14893 BBR	
K14896 GLD	K14893 GLD	

These switches do NOT have to be derated when used with fluorescent and inductive loads.

BS.3676 Pt.1: 1989

These switches do NOT have to be derated when used with fluorescent and inductive loads.

BS.3676 Pt.1: 1989



Switch Modules 10 Amp

10 AMP
SP 1 WAY

10 AMP
SP 2 WAY

10 AMP
SP 2 WAY
PUSH SWITCH

10 AMP
SP 2 WAY
RED ROCKER
PUSH SWITCH

10 AMP
SP 2 WAY
BELL
PUSH SWITCH

10 AMP
SP 2 WAY
PRESS
PUSH SWITCH



FINISHES

**BRUSHED
STAINLESS STEEL**

☐ STD
☐ OPT

K4881 BSS W
K4881 BSS **B**

K4882 BSS W
K4882 BSS **B**

K4885 BSS W
K4885 BSS **B**

K4885 RED
K4885 RED **B**

K4885 B WHI
K4885 B BLK

K4885 P WHI
K4885 P BLK

POLISHED BRASS

☐ OPT
☐ STD

K4881 PBR W
K4881 PBR B

K4882 PBR W
K4882 PBR B

K4885 PBR W
K4885 PBR B

K4885 RED
K4885 RED B

K4885 B WHI
K4885 B BLK

K4885 P WHI
K4885 P BLK

**SILVER ANODISED
ALUMINIUM**

☐ STD
☐ OPT

K4881 SAA W
K4881 SAA **B**

K4882 SAA W
K4882 SAA **B**

K4885 SAA W
K4885 SAA **B**

K4885 RED
K4885 RED **B**

K4885 B WHI
K4885 B BLK

K4885 P WHI
K4885 P BLK

**POLISHED
CHROME**

☐ OPT
☐ STD

K4881 POC W
K4881 POC B

K4882 POC W
K4882 POC B

K4885 POC W
K4885 POC B

K4885 RED
K4885 RED B

K4885 B WHI
K4885 B BLK

K4885 P WHI
K4885 P BLK

WHITE

☐ STD

K4881 WHI

K4882 WHI

K4885 WHI

K4885 RED

K4885 B WHI

K4885 P WHI

**BLACK ANODISED
ALUMINIUM**

☐ STD

K4881 BLK

K4882 BLK

K4885 BLK

K4885 RED B

K4885 B BLK

K4885 P BLK

POLISHED BRONZE

☐ STD

K4881 PBZ B

K4882 PBZ B

K4885 PBZ B

K4885 RED B

K4885 B BLK

K4885 P BLK

ANTIQUE BRONZE

☐ STD

K4881 ABR B

K4882 ABR B

K4885 ABR B

K4885 RED B

K4885 B BLK

K4885 P BLK

BRUSHED BRASS

☐ OPT
☐ STD

K4881 BBR W
K4881 BBR B

K4882 BBR W
K4882 BBR B

K4885 BBR W
K4885 BBR B

K4885 RED
K4885 RED B

K4885 B WHI
K4885 B BLK

K4885 P WHI
K4885 P BLK

GOLD PLATED

☐ OPT
☐ STD

K4881 GLD W
K4881 GLD B

K4882 GLD W
K4882 GLD B

K4885 GLD W
K4885 GLD B

K4885 RED
K4885 RED B

K4885 B WHI
K4885 B BLK

K4885 P WHI
K4885 P BLK

W White Inserts
B Black Inserts
STD Standard Black or
STD White
OPT Option Black or
OPT White

These switches do NOT have to be derated when used with fluorescent or inductive loads.

BS.EN 60669-1: 2000

These switches do NOT have to be derated when used with fluorescent or inductive loads.

BS.EN 60669-1: 2000

These switches do NOT have to be derated when used with fluorescent or inductive loads.

Note: Push switches are not designed for fluorescent loads
BS.EN 60669-1: 2000

These switches do NOT have to be derated when used with fluorescent or inductive loads.

Note: Push switches are not designed for fluorescent loads
BS.EN 60669-1: 2000

These switches do NOT have to be derated when used with fluorescent or inductive loads.

Note: Push switches are not designed for fluorescent loads
BS.EN 60669-1: 2000

These switches do NOT have to be derated when used with fluorescent or inductive loads.

Note: Push switches are not designed for fluorescent loads
BS.EN 60669-1: 2000

TECHNICAL HOTLINE +44 (0)1268 563720

DECORATIVE

Switch Modules 20 Amp

10 AMP
DP 1 WAY

10 AMP
RETRACTIVE

20 AMP
SP 1 WAY

20 AMP
SP 1 WAY
WITH
WINDOW

20 AMP
SP 2 WAY

20 AMP
SP 2 WAY
WITH
WINDOW

20 AMP
SP 2 WAY
RED
ROCKER


K4981 BSS W K4981 BSS B	K4900 BSS W K4900 BSS B	K4891 BSS W K4891 BSS B	K4891 W WHI K4891 W BLK	K4892 BSS W K4892 BSS B	K4892 W WHI K4892 W BLK	K4892 RED K4892 RED B
K4981 PBR W K4981 PBR B	K4900 PBR W K4900 PBR B	K4891 PBR W K4891 PBR B	K4891 W WHI K4891 W BLK	K4892 PBR W K4892 PBR B	K4892 W WHI K4892 W BLK	K4892 RED K4892 RED B
K4981 SAA W K4981 SAA B	K4900 SAA W K4900 SAA B	K4891 SAA W K4891 SAA B	K4891 W WHI K4891 W BLK	K4892 SAA W K4892 SAA B	K4892 W WHI K4892 W BLK	K4892 RED K4892 RED B
K4981 POC W K4981 POC B	K4900 POC W K4900 POC B	K4891 POC W K4891 POC B	K4891 W WHI K4891 W BLK	K4892 POC W K4892 POC B	K4892 W WHI K4892 W BLK	K4892 RED K4892 RED B
K4981 WHI	K4900 WHI	K4891 WHI	K4891 W WHI	K4892 WHI	K4892 W WHI	K4892 RED
K4981 BLK	K4900 BLK	K4891 BLK	K4891 W BLK	K4892 BLK	K4892 W BLK	K4892 RED B
K4981 PBZ B	K4900 PBZ B	K4891 PBZ B	K4891 W BLK	K4892 PBZ B	K4892 W BLK	K4892 RED B
K4981 ABR B	K4900 ABR B	K4891 ABR B	K4891 W BLK	K4892 ABR B	K4892 W BLK	K4892 RED B
K4981 BBR W K4981 BBR B	K4900 BBR W K4900 BBR B	K4891 BBR W K4891 BBR B	K4891 W WHI K4891 W BLK	K4892 BBR W K4892 BBR B	K4892 W WHI K4892 W BLK	K4892 RED K4892 RED B
K4981 GLD W K4981 GLD B	K4900 GLD W K4900 GLD B	K4891 GLD W K4891 GLD B	K4891 W WHI K4891 W BLK	K4892 GLD W K4892 GLD B	K4892 W WHI K4892 W BLK	K4892 RED K4892 RED B

These switches do NOT have to be derated when used with fluorescent or inductive loads.

BS.EN 60669-1: 2000

These switches do NOT have to be derated when used with fluorescent or inductive loads.

BS.EN 60669-1: 2000

These switches do NOT have to be derated when used with fluorescent or inductive loads.

BS.3676 Pt.1: 1989

These switches do NOT have to be derated when used with fluorescent or inductive loads.

BS.3676 Pt.1: 1989

These switches do NOT have to be derated when used with fluorescent or inductive loads.

BS.EN 60669-1: 2000

These switches do NOT have to be derated when used with fluorescent or inductive loads.

BS.EN 60669-1: 2000

These switches do NOT have to be derated when used with fluorescent or inductive loads.

BS.EN 60669-1: 2000

Switch Modules 20 Amp

SP

2 WAY
WITH NEON
LOCATOR



DP
1 WAY

DP
1 WAY
WITH TEXT

DP
1 WAY
WITH NEON

DP
1 WAY
WITH NEON
AND TEXT

DP
1 WAY
WITH
WINDOW



FINISHES

BRUSHED
STAINLESS STEEL

STD
OPT

K4892 L WHI
K4892 L BLK

K4896 BSS W
K4896 BSS B

BOILER
K4896 BR WHI
K4896 BR BLK

K4896 N WHI
K4896 N BLK

BOILER
K4896N BR WHI
K4896N BR BLK

K4896 W WHI
K4896 W BLK

POLISHED BRASS

OPT
STD

K4892 L WHI
K4892 L BLK

K4896 PBR W
K4896 PBR B

DISHWASHER
K4896 DW WHI
K4896 DW BLK

K4896 N WHI
K4896 N BLK

DISHWASHER
K4896N DW WHI
K4896N DW BLK

K4896 W WHI
K4896 W BLK

SILVER ANODISED
ALUMINIUM

STD
OPT

K4892 L WHI
K4892 L BLK

K4896 SAA W
K4896 SAA B

COOKER HOOD
K4896 CH WHI
K4896 CH BLK

K4896 N WHI
K4896 N BLK

COOKER HOOD
K4896N CH WHI
K4896N CH BLK

K4896 W WHI
K4896 W BLK

POLISHED
CHROME

OPT
STD

K4892 L WHI
K4892 L BLK

K4896 POC W
K4896 POC B

FAN
K4896 FN WHI
K4896 FN BLK

K4896 N WHI
K4896 N BLK

FAN
K4896N FN WHI
K4896N FN BLK

K4896 W WHI
K4896 W BLK

WHITE

STD

K4892 L WHI

K4896 WHI

FRIDGE
K4896 FG WHI
K4896 FG BLK

K4896 N WHI

FRIDGE
K4896N FG WHI
K4896N FG BLK

K4896 W WHI

BLACK ANODISED
ALUMINIUM

STD

K4892 L BLK

K4896 BLK

FREEZER
K4896 FZ WHI
K4896 FZ BLK

K4896 N WHI

FREEZER
K4896N FZ WHI
K4896N FZ BLK

K4896 W WHI

POLISHED BRONZE

STD

K4892 L BLK

K4896 PBZ B

WASTE DISPOSAL
K4896 WD WHI
K4896 WD BLK

K4896 N WHI

WASTE DISPOSAL
K4896N WD WHI
K4896N WD BLK

K4896 W WHI

ANTIQUE BRONZE

STD

K4892 L BLK

K4896 ABR B

WASHING MACHINE
K4896 WM WHI
K4896 WM BLK

K4896 N WHI

WASHING MACHINE
K4896N WM WHI
K4896N WM BLK

K4896 W WHI

BRUSHED BRASS

OPT
STD

K4892 L WHI
K4892 L BLK

K4896 GLD W
K4896 GLD B

TUMBLE DRYER
K4896 TD WHI
K4896 TD BLK

K4896 N WHI
K4896 N BLK

MICROWAVE
K4896N MW WHI
K4896N MW BLK

K4896 W WHI
K4896 W BLK

GOLD PLATED

OPT
STD

K4892 L WHI
K4892 L BLK

K4896 BBR W
K4896 BBR B

HEATER
K4896 HR WHI
K4896 HR BLK

K4896 N WHI
K4896 N BLK

HEATER
K4896N HR WHI
K4896N HR BLK

K4896 W WHI
K4896 W BLK

OVEN
K4896 OV WHI
K4896 OV BLK

OVEN
K4896N OV WHI
K4896N OV BLK

HOB
K4896 HB WHI
K4896 HB BLK

HOB
K4896N HB WHI
K4896N HB BLK

W White Inserts

B Black Inserts

STD Standard Black or

STD White

OPT Option Black or

OPT White

These switches do NOT have to be derated when used with fluorescent or inductive loads.

BS.3676 Pt.1: 1989

These switches do NOT have to be derated when used with fluorescent or inductive loads.

BS.3676 Pt.1: 1989

These switches do NOT have to be derated when used with fluorescent or inductive loads.

Additional printed modules available. See pages 148 – 156

BS.3676 Pt.1: 1989

These switches do NOT have to be derated when used with fluorescent or inductive loads.

BS.3676 Pt.1: 1989

These switches do NOT have to be derated when used with fluorescent or inductive loads.

Additional printed modules available. See pages 148 – 156

BS.3676 Pt.1: 1989

These switches do NOT have to be derated when used with fluorescent or inductive loads.

BS.3676 Pt.1: 1989

LEAD TIMES
Please contact our Customer Services Department on: 01268 563000



TECHNICAL HOTLINE +44 (0)1268 563720

DECORATIVE

DP 1 WAY RED ROCKER	INTERMEDIATE	INTERMEDIATE RED ROCKER	SP 2 WAY & CENTRE OFF	SP 2 WAY & CENTRE OFF RED ROCKER	DP 1 WAY PUSH MAKE	DP 1 WAY PUSH MAKE RED ROCKER
---------------------------	--------------	----------------------------	-----------------------------	---	--------------------------	--



K4896 RED K4896 RED B	K4893 BSS W K4893 BSS B	K4893 RED K4893 RED B	K4899 BSS W K4899 BSS B	K4899 RED K4893 RED B	K4910 BSS W K4910 BSS B	K4910 RED K4910 RED B
K4896 RED K4896 RED B	K4893 PBR W K4893 PBR B	K4893 RED K4893 RED B	K4899 PBR W K4899 PBR B	K4899 RED K4899 RED B	K4910 PBR W K4910 PBR B	K4910 RED K4910 RED B
K4896 RED K4896 RED B	K4893 SAA W K4893 SAA B	K4893 RED K4893 RED B	K4899 SAA W K4899 SAA B	K4899 RED K4899 RED B	K4910 SAA W K4910 SAA B	K4910 RED K4910 RED B
K4896 RED K4896 RED B	K4893 POC W K4893 POC B	K4893 RED K4893 RED B	K4899 POC W K4899 POC B	K4899 RED K4899 RED B	K4910 POC W K4910 POC B	K4910 RED K4910 RED B
K4896 RED	K4893 WHI	K4893 RED	K4899 WHI	K4899 RED	K4910 WHI	K4910 RED
K4896 RED B	K4893 BLK	K4893 RED B	K4899 BLK	K4899 RED B	K4910 BLK	K4910 RED B
K4896 RED B	K4893 PBZ B	K4893 RED B	K4899 PBZ B	K4899 RED B	K4910 PBZ B	K4910 RED B
K4896 RED B	K4893 ABR B	K4893 RED B	K4899 ABR B	K4899 RED B	K4910 ABR B	K4910 RED B
K4896 RED K4896 RED B	K4893 BBR W K4893 BBR B	K4893 RED K4893 RED B	K4899 BBR W K4899 BBR B	K4899 RED K4899 RED B	K4910 BBR W K4910 BBR B	K4910 RED K4910 RED B
K4896 RED K4896 RED B	K4893 GLD W K4893 GLD B	K4893 RED K4893 RED B	K4899 GLD W K4899 GLD B	K4899 RED K4899 RED B	K4910 GLD W K4910 GLD B	K4910 RED K4910 RED B

These switches do NOT have to be derated when used with fluorescent or inductive loads.

BS.3676 Pt.1: 1989

These switches do NOT have to be derated when used with fluorescent or inductive loads.

BS.3676 Pt.1: 1989

These switches do NOT have to be derated when used with fluorescent or inductive loads.

BS.3676 Pt.1: 1989

These switches do NOT have to be derated when used with fluorescent or inductive loads.

BS.3676 Pt.1: 1989

These switches do NOT have to be derated when used with fluorescent or inductive loads.

BS.3676 Pt.1: 1989

These switches do NOT have to be derated when used with inductive loads.

Note: Push switches are not designed for fluorescent loads

BS.3676 Pt.1: 1989

These switches do NOT have to be derated when used with inductive loads.

Note: Push switches are not designed for fluorescent loads

BS.3676 Pt.1: 1989

Switch Modules 20 Amp

DP
1 WAY
PUSH BREAK

DP
1 WAY
PUSH BREAK
RED ROCKER

Key Switch Module

SP
KEY SWITCH
2 WAY

SP
KEY SWITCH
2 WAY
MARKED
'EMG LTG'

DP
KEY SWITCH
1 WAY

INTERMEDIATE
KEY SWITCH



FINISHES

BRUSHED
STAINLESS STEEL

STD
OPT

K4915 BSS W
K4915 BSS B

K4915 RED
K4915 RED B

K4898 WHI
K4898 BLK

K4898 EL WHI
K4898 EL BLK

K4917 WHI
K4917 BLK

K4894 WHI
K4894 BLK

POLISHED BRASS

OPT
STD

K4915 PBR W
K4915 PBR B

K4915 RED
K4915 RED B

K4898 WHI
K4898 BLK

K4898 EL WHI
K4898 EL BLK

K4917 WHI
K4917 BLK

K4894 WHI
K4894 BLK

SILVER ANODISED
ALUMINIUM

STD
OPT

K4915 SAA W
K4915 SAA B

K4915 RED
K4915 RED B

K4898 WHI
K4898 BLK

K4898 EL WHI
K4898 EL BLK

K4917 WHI
K4917 BLK

K4894 WHI
K4894 BLK

POLISHED
CHROME

OPT
STD

K4915 POC W
K4915 POC B

K4915 RED
K4915 RED B

K4898 WHI
K4898 BLK

K4898 EL WHI
K4898 EL BLK

K4917 WHI
K4917 BLK

K4894 WHI
K4894 BLK

WHITE

STD

K4915 WHI

K4915 RED

K4898 WHI

K4898 EL WHI

K4917 WHI

K4894 WHI

BLACK ANODISED
ALUMINIUM

STD

K4915 BLK B

K4915 RED B

K4898 BLK

K4898 EL BLK

K4917 BLK

K4894 BLK

POLISHED BRONZE

STD

K4915 PBZ B

K4915 RED B

K4898 BLK

K4898 EL BLK

K4917 BLK

K4894 BLK

ANTIQUE BRONZE

STD

K4915 ABR B

K4915 RED B

K4898 BLK

K4898 EL BLK

K4917 BLK

K4894 BLK

BRUSHED BRASS

OPT
STD

K4915 BBR W
K4915 BBR B

K4915 RED
K4915 RED B

K4898 WHI
K4898 BLK

K4898 EL WHI
K4898 EL BLK

K4917 WHI
K4917 BLK

K4894 WHI
K4894 BLK

GOLD PLATED

OPT
STD

K4915 GLD W
K4915 GLD B

K4915 RED
K4915 RED B

K4898 WHI
K4898 BLK

K4898 EL WHI
K4898 EL BLK

K4917 WHI
K4917 BLK

K4894 WHI
K4894 BLK

W White Inserts
B Black Inserts
STD Standard Black or
STD White
OPT Option Black or
OPT White

These switches do NOT have to be derated when used with inductive loads.

Note: Push switches are not designed for fluorescent loads

BS.3676 Pt.1: 1989

These switches do NOT have to be derated when used with inductive loads.

Note: Push switches are not designed for fluorescent loads

BS.3676 Pt.1: 1989

BS.3676 Pt.1: 1989
Key (3405 NIP) is supplied

BS.3676 Pt.1: 1989
Key (3405 NIP) is supplied

BS.3676 Pt.1: 1989
Key (3405 NIP) is supplied

BS.3676 Pt.1: 1989
Key (3405 NIP) is supplied



TECHNICAL HOTLINE +44 (0)1268 563720

DECORATIVE

Indicator
Modules

SP
KEY SWITCH
2 WAY BIASED
ONE WAY

200-250 VOLT
RED

200-250 VOLT
GREEN

200-250 VOLT
AMBER

21-36 VOLT
RED

21-36 VOLT
GREEN

21-36 VOLT
AMBER



K4918 WHI K4918 BLK	K4889 RED K4889 RED B	K4889 GRN K4889 GRN B	K4889 AMB K4889 AMB B	K4836 RED K4836 RED B	K4836 GRN K4836 GRN B	K4836 AMB K4836 AMB B
K4918 WHI K4918 BLK	K4889RED K4889 RED B	K4889 GRN K4889 GRN B	K4889 AMB K4889 AMB B	K4836 RED K4836 RED B	K4836 GRN K4836 GRN B	K4836 AMB K4836 AMB B
K4918 WHI K4918 BLK	K4889 RED K4889 RED B	K4889 GRN K4889 GRN B	K4889 AMB K4889 AMB B	K4836 RED K4836 RED B	K4836 GRN K4836 GRN B	K4836 AMB K4836 AMB B
K4918 WHI K4918 BLK	K4889 RED K4889 RED B	K4889 GRN K4889 GRN B	K4889 AMB K4889 AMB B	K4836 RED K4836 RED B	K4836 GRN K4836 GRN B	K4836 AMB K4836 AMB B
K4918 WHI	K4889 RED	K4889 GRN	K4889 AMB	K4836 RED	K4836 GRN	K4836 AMB
K4918 BLK	K4889 RED B	K4889 GRN B	K4889 AMB B	K4836 RED B	K4836 GRN B	K4836 AMB B
K4918 BLK	K4889 RED B	K4889 GRN B	K4889 AMB B	K4836 RED B	K4836 GRN B	K4836 AMB B
K4918 WHI K4918 BLK	K4889 RED K4889 RED B	K4889 GRN K4889 GRN B	K4889 AMB K4889 AMB B	K4836 RED K4836 RED B	K4836 GRN K4836 GRN B	K4836 AMB K4836 AMB B
K4918 WHI K4918 BLK	K4889 RED K4889 RED B	K4889 GRN K4889 GRN B	K4889 AMB K4889 AMB B	K4836 RED K4836 RED B	K4836 GRN K4836 GRN B	K4836 AMB K4836 AMB B

BS.3676 Pt.1: 1989

Key (3405 NP)
is supplied

BS.5733: 1995

BS.5733: 1995

BS.5733: 1995

BS.5733: 1995

BS.5733: 1995

BS.5733: 1995

Intelligent Dimmer Switch Modules

1 GANG 220W/180VA 230Va.c., 50Hz TWO WAY 1 MODULE	1 GANG 400W/320VA 230Va.c., 50Hz TWO WAY 2 MODULE
---	---

Accessory Modules

TV CO-AXIAL OUTLET NON-ISOLATED	TV CO-AXIAL OUTLET ISOLATED	16 AMP CORD OUTLET	13 AMP FUSE UNIT
---------------------------------------	-----------------------------------	-----------------------	---------------------



FINISHES

BRUSHED STAINLESS STEEL STD OPT	K4501 BSS W LV K4501 BSS B LV	K4500 BSS W LV K4500 BSS B LV	K4520 WHI K4520 BLK	K4521 WHI K4521 BLK	K4886 WHI K4886 BLK	K4890 WHI K4890 BLK
POLISHED BRASS OPT STD	K4501 PBR W LV K4501 PBR B LV	K4500 PBR W LV K4500 PBR B LV	K4520 WHI K4520 BLK	K4521 WHI K4521 BLK	K4886 WHI K4886 BLK	K4890 WHI K4890 BLK
SILVER ANODISED ALUMINIUM STD OPT	K4501 SAA W LV K4501 SAA B LV	K4500 SAA W LV K4500 SAA B LV	K4520 WHI K4520 BLK	K4521 WHI K4521 BLK	K4886 WHI K4886 BLK	K4890 WHI K4890 BLK
POLISHED CHROME OPT STD	K4501 POC W LV K4501 POC B LV	K4500 POC W LV K4500 POC B LV	K4520 WHI K4520 BLK	K4521 WHI K4521 BLK	K4886 WHI K4886 BLK	K4890 WHI K4890 BLK
WHITE STD	K4501 WHI W LV	K4500 WHI W LV	K4520 WHI	K4521 WHI	K4886 WHI	K4890 WHI
BLACK ANODISED ALUMINIUM STD	K4501 BLA B LV	K4500 BLA B LV	K4520 BLK	K4521 BLK	K4886 BLK	K4890 BLK
POLISHED BRONZE STD	K4501 PBZ B LV	K4500 PBZ B LV	K4520 BLK	K4521 BLK	K4886 BLK	K4890 BLK
ANTIQUE BRONZE STD	K4501 ABR B LV	K4500 ABR B LV	K4520 BLK	K4521 BLK	K4886 BLK	K4890 BLK
BRUSHED BRASS OPT STD	K4501 BBR W LV K4501 BBR B LV	K4500 BBR W LV K4500 BBR B LV	K4520 WHI K4520 BLK	K4521 WHI K4521 BLK	K4886 WHI K4886 BLK	K4890 WHI K4890 BLK
GOLD PLATED OPT STD	K4501 GLD W LV K4501 GLD B LV	K4500 GLD W LV K4500 GLD B LV	K4520 WHI K4520 BLK	K4521 WHI K4521 BLK	K4886 WHI K4886 BLK	K4890 WHI K4890 BLK

- W** White Inserts
B Black Inserts
STD Standard Black or
STD White
OPT Option Black or
OPT White

These dimmers incorporate the latest in micro-controller based circuitry to provide electronic soft-start and overload protection. They are radio frequency interference suppressed to BS EN 55015.

Suitable for use with tungsten filament lamps and for low voltage halogen lamps via good quality, dimmable, electronic or wire-wound transformers.

They are not suitable for fluorescent lamps.
K4500 WHI and K4501 WHI can also be used with good quality mains voltage halogen lamps incorporating GU10 bases. Please check with lamp manufacturer to determine suitability.

Note: Refer to technical section for derating factors when more than one unit is used in any one box.

Conforms to the latest standards BS EN 60669-2-1 and BS EN 55015.

Not suitable for 1, 3, 6 and 9 Grid Modules

For direct connection to TV or FM aerial co-axial download.

Not to be used in same enclosure as mains exceeding 50V.

For direct connection to TV or FM aerial co-axial download.

Not to be used in same enclosure as mains exceeding 50V.

Provides safety isolation rated at 2kV between aerial lead and socket.

Complete with 3 pairs of terminals. The supply terminals are suitable for up to 2 x 2.5mm² or 1 x 4mm² solid conductors. The load terminals are suitable for one 1.5mm² flexible cord.

A cord grip is also fitted.

Fuse carrier comes with 13amp cartridge fuse link to BS.1362. BS.5733: 1995

LEAD TIMES
 Please contact our Customer Services Department on:
 01268 563000

TECHNICAL HOTLINE +44 (0)1268 563720

DECORATIVE

Power Modules

13 AMP
FUSE UNIT
WITH
TAMPER-
PROOF
SCREW

BLANK
INSERT

BUZZER UNIT
230 VOLT

BUZZER UNIT
24 VOLT

16 AMP
1 MODULE
UNIVERSAL
SOCKET
(NON UK)

GERMAN
2P+E 16 AMP
250V SHUTTERED
EURO*
2 MODULE
(NON UK)

AMERICAN
15 AMP 127V
SHUTTERED
EURO*
2 MODULE
(NON UK)

UK
1 GANG
13 AMP DP
EURO*
2 MODULE

K4890KO WHI K4890KO BLK	K4880 BSS W K4880 BSS B	K4000 WHI K4000 BLK	K4001 WHI K4001 BLK	K4901 WHI K4901 BLK	K5831 WHI K5831 BLK	K5832 WHI K5832 BLK	K5830 WHI K5830 BLK	
K4890KO WHI K4890KO BLK	K4880 PBR W K4880 PBR B	K4000 WHI K4000 BLK	K4001 WHI K4001 BLK	K4901 WHI K4901 BLK	K5831 WHI K5831 BLK	K5832 WHI K5832 BLK	K5830 WHI K5830 BLK	
K4890KO WHI K4890KO BLK	K4880 SAA W K4880 SAA B	K4000 WHI K4000 BLK	K4001 WHI K4001 BLK	K4901 WHI K4901 BLK	K5831 WHI K5831 BLK	K5832 WHI K5832 BLK	K5830 WHI K5830 BLK	
K4890KO WHI K4890KO BLK	K4880 POC W K4880 POC B	K4000 WHI K4000 BLK	K4001 WHI K4001 BLK	K4901 WHI K4901 BLK	K5831 WHI K5831 BLK	K5832 WHI K5832 BLK	K5830 WHI K5830 BLK	
K4890KO WHI	K4880 WHI	K4000 WHI	K4001 WHI	K4901 WHI	K5831 WHI	K5832 WHI	K5830 WHI	
K4890KO BLK	K4880 BLK	K4000 BLK	K4001 BLK	K4901 BLK	K5831 BLK	K5832 BLK	K5830 BLK	
K4890KO BLK	K4880 PBZ B	K4000 BLK	K4001 BLK	K4901 BLK	K5831 BLK	K5832 BLK	K5830 BLK	
K4890KO BLK	K4880 ABR B	K4000 BLK	K4001 BLK	K4901 BLK	K5831 BLK	K5832 BLK	K5830 BLK	
K4890KO WHI K4890KO BLK	K4880 BBR W K4880 BBR B	K4000 WHI K4000 BLK	K4001 WHI K4001 BLK	K4901 WHI K4901 BLK	K5831 WHI K5831 BLK	K5832 WHI K5832 BLK	K5830 WHI K5830 BLK	
K4890KO WHI K4890KO BLK	K4880 GLD W K4880 GLD B	K4000 WHI K4000 BLK	K4001 WHI K4001 BLK	K4901 WHI K4901 BLK	K5831 WHI K5831 BLK	K5832 WHI K5832 BLK	K5830 WHI K5830 BLK	

Fuse carrier comes
with 13amp cartridge
fuse link to BS.1362.
BS.5733: 1995

200-250V
BS.5733: 1995

21-36V
BS.5733: 1995

The Universal Socket
does not incorporate
an earth contact.
Appliances needing
earth connection
(class 1 equipment)
must NOT be used
with this socket.

The socket is intended
for use with BS, USA
and CEE standard
plugs.
BS.5733:1995

MOUNTING BOX
46mm
DIMENSIONS
50 x 50mm
IEC 60884-1: 2002

MOUNTING BOX
35mm
46mm (for extra
wiring space)
DIMENSIONS
50 x 50mm
SSA.444: 1985

MOUNTING BOX
35mm minimum
46mm (for extra
wiring space)
DIMENSIONS
50 x 50mm
BS. 1363: Part 2:
1995

Mains operated products and extra low voltage modules must
not be installed within the same frontplate aperture. Refer to
BS. 7671 IEE Wiring Regulations for details.

* Euro frontplates can be found on page 101.

Intelligent Dimmers (CE marked)

2 WAY SINGLE
230V a.c. 50Hz
60W/VA MIN.-
500W/400VA
MAX.

2 WAY DOUBLE
230V a.c. 50Hz
60W/VA MIN.
450W/360VA
MAX. FOR EACH
DIMMER

2 WAY SINGLE
230V a.c. 50Hz
40W/VA MIN.
300W/240VA
MAX.

2 WAY DOUBLE
230V a.c. 50Hz
40W/VA MIN.
300W/240VA
MAX. FOR
EACH DIMMER

Dimmers
(NON UK)

220V a.c. 50Hz
250W
SINGLE
1 WAY

220V a.c. 50Hz
500W
SINGLE
1 WAY

FINISHES

BRUSHED
STAINLESS STEEL

K14301 BSS

K14302 BSS

K14521 BSS

K14522 BSS

K14531 BSS

K14541 BSS

POLISHED BRASS

K14301 PBR

K14302 PBR

K14521 PBR

K14522 PBR

K14531 PBR

K14541 PBR

SILVER ANODISED
ALUMINIUM

K14301 SAA

K14302 SAA

K14521 SAA

K14522 SAA

K14531 SAA

K14541 SAA

POLISHED
CHROME

K14301 POC

K14302 POC

K14521 POC

K14522 POC

K14531 POC

K14541 POC

WHITE

K14301 WHI

K14302 WHI

K14521 WHI

K14522 WHI

K14531 WHI

K14541 WHI

BLACK ANODISED
ALUMINIUM

K14301 BLA

K14302 BLA

K14521 BLA

K14522 BLA

K14531 BLA

K14541 BLA

POLISHED BRONZE

K14301 PBZ

K14302 PBZ

K14521 PBZ

K14522 PBZ

K14531 PBZ

K14541 PBZ

ANTIQUE BRONZE

K14301 ABR

K14302 ABR

K14521 ABR

K14522 ABR

K14531 ABR

K14541 ABR

BRUSHED BRASS

K14301 BBR

K14302 BBR

K14521 BBR

K14522 BBR

K14531 BBR

K14541 BBR

GOLD PLATED

K14301 GLD

K14302 GLD

K14521 GLD

K14522 GLD

K14531 GLD

K14541 GLD

MOUNTING BOXES

FLUSH 866 ZIC —
35mm deep min

DIMENSIONS:
86 x 86mm

FIXING CENTRES:
60.3mm

These dimmers employ the latest micro-controller based circuitry to provide electronic soft-start and overload protection. They are suitable for use with good quality electronic or wire-wound transformers. Can also be used with good quality halogen lamps incorporating GU10 bases. Please check with lamp manufacturer to determine suitability.

NOT SUITABLE FOR FLUORESCENT LOADS.

Conform to latest standards BS EN 60669-2-1 and BS EN 55015.

All dimmers have a combined push-on/push-off switch and rotary dimmer control, and are suitable for one or two-way switching. They are radio frequency interference suppressed to BS EN 55015.

MOUNTING BOXES

FLUSH 886 ZIC —
35mm deep min

DIMENSIONS:
86 x 86mm

FIXING CENTRES:
120.6mm

MOUNTING BOXES

FLUSH 866 ZIC —
35mm deep min

DIMENSIONS:
86 x 86mm

FIXING CENTRES:
60.3mm

MOUNTING BOXES

FLUSH 866 ZIC —
35mm deep min

DIMENSIONS:
86 x 86mm

FIXING CENTRES:
60.3mm

MOUNTING BOXES

FLUSH 866 ZIC —
35mm deep min

DIMENSIONS:
86 x 86mm

FIXING CENTRES:
60.3mm

Suitable for tungsten
GLS lamps only.

NOT SUITABLE FOR
FLUORESCENT LOADS.

MOUNTING BOXES

FLUSH 866 ZIC —
35mm deep min

DIMENSIONS:
86 x 86mm

FIXING CENTRES:
60.3mm

Suitable for tungsten
GLS lamps only.

NOT SUITABLE FOR
FLUORESCENT LOADS.








LEAD TIMES
Please contact our Customer
Services Department on:
01268 563000



TECHNICAL HOTLINE +44 (0)1268 563720

DECORATIVE

220V a.c. 50Hz 1000W SINGLE 2 WAY	220V a.c. 60Hz 250W SINGLE 1 WAY	220V a.c. 60Hz 500W SINGLE 1 WAY	220V a.c. 60Hz 1000W SINGLE 2 WAY	127V a.c. 60Hz 250W SINGLE 1 WAY	127V a.c. 60Hz 450W SINGLE 2 WAY	127V a.c. 60Hz 650W SINGLE 2 WAY
--	---	---	--	---	---	---

**K14561 BSS****K14631 BSS****K14641 BSS****K14661 BSS****K14731 BSS****K14741 BSS****K14761 BSS****K14561 PBR****K14631 PBR****K14641 PBR****K14661 PBR****K14731 PBR****K14741 PBR****K14761 PBR****K14561 SAA****K14631 SAA****K14641 SAA****K14661 SAA****K14731 SAA****K14741 SAA****K14761 SAA****K14561 POC****K14631 POC****K14641 POC****K14661 POC****K14731 POC****K14741 POC****K14761 POC****K14561 WHI****K14631 WHI****K14641 WHI****K14661 WHI****K14731 WHI****K14741 WHI****K14761 WHI****K14561 BLA****K14631 BLA****K14641 BLA****K14661 BLA****K14731 BLA****K14741 BLA****K14761 BLA****K14561 PBZ****K14631 PBZ****K14641 PBZ****K14661 PBZ****K14731 PBZ****K14741 PBZ****K14761 PBZ****K14561 ABR****K14631 ABR****K14641 ABR****K14661 ABR****K14731 ABR****K14741 ABR****K14761 ABR****K14561 BBR****K14631 BBR****K14641 BBR****K14661 BBR****K14731 BBR****K14741 BBR****K14761 BBR****K14561 GLD****K14631 GLD****K14641 GLD****K14661 GLD****K14731 GLD****K14741 GLD****K14761 GLD****MOUNTING BOXES**FLUSH 866 ZIC —
35mm deep minDIMENSIONS:
86 x 86mmFIXING CENTRES:
60.3mmSuitable for tungsten
GLS lamps only.NOT SUITABLE FOR
FLUORESCENT LOADS.**MOUNTING BOXES**FLUSH 866 ZIC —
35mm deep minDIMENSIONS:
86 x 86mmFIXING CENTRES:
60.3mmSuitable for tungsten
GLS lamps only.NOT SUITABLE FOR
FLUORESCENT LOADS.**MOUNTING BOXES**FLUSH 866 ZIC —
35mm deep minDIMENSIONS:
86 x 86mmFIXING CENTRES:
60.3mmSuitable for tungsten
GLS lamps only.NOT SUITABLE FOR
FLUORESCENT LOADS.**MOUNTING BOXES**FLUSH: 866 ZIC —
35mm deep minDIMENSIONS:
86 x 86mmFIXING CENTRES:
60.3mmSuitable for tungsten
GLS lamps only.NOT SUITABLE FOR
FLUORESCENT LOADS.**MOUNTING BOXES**FLUSH: 866 ZIC —
35mm deep minDIMENSIONS:
86 x 86mmFIXING CENTRES:
60.3mmSuitable for tungsten
GLS lamps only.NOT SUITABLE FOR
FLUORESCENT LOADS.**MOUNTING BOXES**FLUSH: 866 ZIC —
35mm deep minDIMENSIONS:
86 x 86mmFIXING CENTRES:
60.3mmSuitable for tungsten
GLS lamps only.NOT SUITABLE FOR
FLUORESCENT LOADS.**MOUNTING BOXES**FLUSH: 886 ZIC —
35mm deep minDIMENSIONS:
86 x 146mmFIXING CENTRES:
120.6mmSuitable for tungsten
GLS lamps only.NOT SUITABLE FOR
FLUORESCENT LOADS.

Datacom Frontplates

EURO
1 MODULE
25 X 50MM

EURO
2 MODULE
50 X 50MM
4 MODULE
100 X 50MM

LJU6C
2 MODULE
22 X 37MM
(X 2)

Datacom Modules

RJ45
CAT 5E (UTP)
EURO
1 MODULE

RJ45
CAT 5E (STP)
SCREENED
EURO
1 MODULE

RJ45
ANGLED
CAT 5E (UTP)
EURO
1 MODULE

BNC
50 Ω
EURO
1 MODULE

FINISHES

BRUSHED STAINLESS STEEL STD OPT	K14181 BSS	K14182 BSS K14184 BSS	K14172 BSS	K5845 WHI K5845 BLK	K5845s WHI K5845s BLK	K5844 WHI	K5801 WHI K5801 BLK
POLISHED BRASS OPT STD	K14181 PBR	K14182 PBR K14184 PBR	K14172 PBR	K5845 WHI K5845 BLK	K5845s WHI K5845s BLK	K5844 WHI	K5801 WHI K5801 BLK
SILVER ANODISED ALUMINIUM STD OPT	K14181 SAA	K14182 SAA K14184 SAA	K14172 SAA	K5845 WHI K5845 BLK	K5845s WHI K5845s BLK	K5844 WHI	K5801 WHI K5801 BLK
POLISHED CHROME OPT STD	K14181 POC	K14182 POC K14184 POC	K14172 POC	K5845 WHI K5845 BLK	K5845s WHI K5845s BLK	K5844 WHI	K5801 WHI K5801 BLK
WHITE STD	K14181 WHI	K14182 WHI K14184 WHI	K14172 WHI	K5845 WHI	K5845s WHI	K5844 WHI	K5801 WHI
BLACK ANODISED ALUMINIUM STD	K14181 BLA	K14182 BLA K14184 BLA	K14172 BLA	K5845 BLK	K5845s BLK	K5844 WHI	K5801 BLK
POLISHED BRONZE STD	K14181 PBZ	K14182 PBZ K14184 PBZ	K14172 PBZ	K5845 BLK	K5845s BLK	K5844 WHI	K5801 BLK
ANTIQUE BRONZE STD	K14181 ABR	K14182 ABR K14184 ABR	K14172 ABR	K5845 BLK	K5845s BLK	K5844 WHI	K5801 BLK
BRUSHED BRASS OPT STD	K14181 BBR	K14182 BBR K14184 BBR	K14172 BBR	K5845 WHI K5845 BLK	K5845s WHI K5845s BLK	K5844 WHI	K5801 WHI K5801 BLK
GOLD PLATED OPT STD	K14181 GLD	K14182 GLD K14184 GLD	K14172 GLD	K5845 WHI K5845 BLK	K5845s WHI K5845s BLK	K5844 WHI	K5801 WHI K5801 BLK

W White Inserts
B Black Inserts
STD Standard Black or
STD White
OPT Option Black or
OPT White

MOUNTING BOXES
suitable for flush
boxes to
BS.4662:1970 and
surface boxes to
BS.5733:1995
Refer to appropriate
module for minimum
box depth

FIXING CENTRES
1G: 60.3mm

BS.5733:1995 where
applicable

Note: No grid
required, modules
just clip into place.

MOUNTING BOXES
suitable for flush
boxes to
BS.4662:1970 and
surface boxes to
BS.5733:1995
Refer to appropriate
module for minimum
box depth

FIXING CENTRES
1G: 60.3mm
2G: 120.6mm

BS.5733:1995
where applicable

Note: No grid
required, modules
just clip into place.

MOUNTING BOXES
suitable for flush
boxes to
BS.4662:1970 and
surface boxes to
BS.5733:1995
Refer to appropriate
module for minimum
box depth

FIXING CENTRES
1G: 60.3mm

BS.5733:1995
where applicable

Note: No grid
required, modules
just clip into place.

RJ45 Modules

Enhanced Cat 5 performance
Suitable for both 568A and
568B wiring schemes
Supplied with cable tie and
cable anchors to secure wires in
the connectors

MOUNTING BOXES
Min. box depth 25mm
TIA/EIA TS840A:Cat 5e
TIA/EIA 568-A:Cat 5e
ISO/IEC11801:Cat 5e

50 Ohm crimp
connector suitable for
use with RG58,
URM43,URM76 and
Beldon 9907 type
co-axial cables

MOUNTING BOXES
Min. box depth
25mm

LEAD TIMES
Please contact our Customer
Services Department on:
01268 563000

These products are fully compatible with Labgear TV distribution systems and are approved for use in "Sky Homes" and "Homes On" specifications

Telecom Modules

MASTER
BT
EURO
1 MODULE

SECONDARY
BT
EURO
1 MODULE

RJ11/RJ12
EURO
1 MODULE

RJ11/RJ12
LJU6C
1 MODULE

Blank Modules

EURO
2 MODULE
(50 X 50MM)

EURO
1 MODULE
(25 X 50MM)

FINISHES

BRUSHED STAINLESS STEEL ☐ STD ☐ OPT	K5820 WHI K5820 BLK	K5821 WHI K5821 BLK	K5887 WHI K5887 BLK	K5787 WHI K5787 BLK	K180 WHI K188 BLK X 2	K188 WHI K188 BLK
POLISHED BRASS ☐ OPT ☐ STD	K5820 WHI K5820 BLK	K5821 WHI K5821 BLK	K5887 WHI K5887 BLK	K5787 WHI K5787 BLK	K180 WHI K188 BLK X 2	K188 WHI K188 BLK
SILVER ANODISED ALUMINIUM ☐ STD ☐ OPT	K5820 WHI K5820 BLK	K5821 WHI K5821 BLK	K5887 WHI K5887 BLK	K5787 WHI K5787 BLK	K180 WHI K188 BLK X 2	K188 WHI K188 BLK
POLISHED CHROME ☐ OPT ☐ STD	K5820 WHI K5820 BLK	K5821 WHI K5821 BLK	K5887 WHI K5887 BLK	K5787 WHI K5787 BLK	K180 WHI K188 BLK X 2	K188 WHI K188 BLK
WHITE ☐ STD	K5820 WHI	K5821 WHI	K5887 WHI	K5787 WHI	K180 WHI	K188 WHI
BLACK ANODISED ALUMINIUM ☐ STD	K5820 BLK	K5821 BLK	K5887 BLK	K5787 BLK	K188 BLK X 2	K188 BLK
POLISHED BRONZE ☐ STD	K5820 BLK	K5821 BLK	K5887 BLK	K5787 BLK	K188 BLK X 2	K188 BLK
ANTIQUE BRONZE ☐ STD	K5820 BLK	K5821 BLK	K5887 BLK	K5787 BLK	K188 BLK X 2	K188 BLK
BRUSHED BRASS ☐ OPT ☐ STD	K5820 WHI K5820 BLK	K5821 WHI K5821 BLK	K5887 WHI K5887 BLK	K5787 WHI K5787 BLK	K180 WHI K188 BLK X 2	K188 WHI K188 BLK
GOLD PLATED ☐ OPT ☐ STD	K5820 WHI K5820 BLK	K5821 WHI K5821 BLK	K5887 WHI K5887 BLK	K5787 WHI K5787 BLK	K180 WHI K188 BLK X 2	K188 WHI K188 BLK

W White Inserts
B Black Inserts
☐ STD Standard Black or
☐ STD White
☐ OPT Option Black or
☐ OPT White

MOUNTING BOXES:
Min. box depth 25mm
BS. 6312 Pt.2

MOUNTING BOXES:
Min. box depth 25mm
BS. 6312 Pt.2

Suitable for both RJ11
and RJ12 jacks.
RJ11: 4 wire
RJ12: 6 wire

MOUNTING BOXES:
Min. box depth 25mm
FCC68

Suitable for both RJ11
and RJ12 jacks.
RJ11: 4 wire
RJ12: 6 wire

MOUNTING BOXES:
Min. box depth 25mm
FCC68

MOUNTING BOXES:
Min. box depth 16mm
BS. 5733: 1995 where
applicable

MOUNTING BOXES:
Min. box depth 16mm
BS. 5733: 1995 where
applicable

TECHNICAL HOTLINE +44 (0)1268 563720

DECORATIVE

		Telecom		TV/Satellite			
EURO 1/2 MODULE (12.5 X 50MM)	LJU6 1 MODULE (22 X 37MM)	2A ROUND PIN WITH TELEPHONE SYMBOL (NON UK)	TV/FM SINGLE NON-ISOLATED	TV/FM SINGLE ISOLATED	TV/FM TWIN ISOLATED DIPLEXER	SINGLE F TYPE SATELLITE	
K186 WHI K186 BLK	K170 WHI K170 BLK	K14340 BSS W K14340 BSS B	K14320 BSS W K14320 BSS B	K14321 BSS W K14321 BSS B	K14322 BSS W K14322 BSS B	K14325 BSS W K14325 BSS B	
K186 WHI K186 BLK	K170 WHI K170 BLK	K14340 PBR W K14340 PBR B	K14320 PBR W K14320 PBR B	K14321 PBR W K14321 PBR B	K14322 PBR W K14322 PBR B	K14325 PBR W K14325 PBR B	
K186 WHI K186 BLK	K170 WHI K170 BLK	K14340 SAA W K14340 SAA B	K14320 SAA W K14320 SAA B	K14321 SAA W K14321 SAA B	K14322 SAA W K14322 SAA B	K14325 SAA W K14325 SAA B	
K186 WHI K186 BLK	K170WHI K170 BLK	K14340 POC W K14340 POC B	K14320 POC W K14320 POC B	K14321 POC W K14321 POC B	K14322 POC W K14322 POC B	K14325 POC W K14325 POC B	
K186 WHI	K170 WHI	K14340 WHI W	K14320 WHI W	K14321 WHI W	K14322 WHI W	K14325 WHI W	
K186 BLK	K170 BLK	K14340 BLA B	K14320 BLA B	K14321 BLA B	K14322 BLA B	K14325 BLA B	
K186 BLK	K170 BLK	K14340 PBZ B	K14320 PBZ B	K14321 PBZ B	K14322 PBZ B	K14325 PBZ B	
K186 BLK	K170 BLK	K14340 ABR B	K14320 ABR B	K14321 ABR B	K14322 ABR B	K14325 ABR B	
K186 WHI K186 BLK	K170 WHI K170 BLK	K14340 BBR W K14340 BBR B	K14320 BBR W K14320 BBR B	K14321 BBR W K14321 BBR B	K14322 BBR W K14322 BBR B	K14325 BBR W K14325 BBR B	
K186 WHI K186 BLK	K170 WHI K170 BLK	K14340 GLD W K14340 GLD B	K14320 GLD W K14320 GLD B	K14321 GLD W K14321 GLD B	K14322 GLD W K14322 GLD B	K14325 GLD W K14325 GLD B	

MOUNTING BOXES:
Min. box depth 16mm

BS. 5733: 1995 where
applicable

MOUNTING BOXES:
Min. box depth 16mm

BS. 5733: 1995 where
applicable

Accepts standard
BS.546 2 amp 2 pin +
earth plug where 2
pins are used for
telephone circuits and
the earth pin is used to
ensure correct polarity.

MOUNTING BOX
Flush 35mm: 866 ZIC
Flush 46mm: 877 ZIC
DIMENSIONS:
86 x 86mm
FIXING CENTRES:
60.3mm
BS. 3041: 1977
IEC169-2: 1965
BS. 5733: 1995
applicable

MOUNTING BOXES
FLUSH: 861 ZIC
SURFACE: K2140 WHI

Single outlet for
connection to a single
TV or FM co-axial
aerial lead.

DIMENSIONS
86 x 86mm
FIXING CENTRES
60.3mm
BS. 3041: 1977
IEC169-2: 1965
BS. 5733: 1995 where
applicable

MOUNTING BOXES
FLUSH: 861 ZIC

Provides safety isolation
rated at 2000Va.c.
between aerial lead and
socket. Single outlet for
direct connection to a
single TV or FM co-axial
aerial lead.

DIMENSIONS:
86 x 86mm
FIXING CENTRES
60.3mm
BS. 3041: 1977
IEC169-2: 1965
BS. 5733: 1995 where
applicable

MOUNTING BOXES
FLUSH: 861 ZIC

Provides safety isolation
rated at 2000Va.c.
between aerial lead and
socket. Twin outlet with
TV/FM diplexer for
connection to single
co-axial aerial lead with
combined TV & FM
signals.

DIMENSIONS: 86 x 86mm
FIXING CENTRES
60.3mm
BS. 3041: 1977
IEC169-2: 1965
BS. 5733: 1995 where
applicable

MOUNTING BOXES
FLUSH: 861 ZIC
SURFACE: K2140 WHI
DIMENSIONS:
86 x 86mm

FIXING CENTRES
60.3mm
BS. 3041: 1977
IEC169-2: 1965
BS. 5733: 1995 where
applicable

Grid Plus Spare Mounting Frames

1 MODULE
MOUNTING
FRAME




2 MODULE
MOUNTING
FRAME

3 MODULE
MOUNTING
FRAME

4 MODULE
MOUNTING
FRAME

6 MODULE
MOUNTING
FRAME

1 MODULE
ARCHITRAVE
MOUNTING
FRAME



FINISHES

BRUSHED
STAINLESS STEEL

K14701

K14702

K14703

K14704

K14706

K14801

POLISHED BRASS

K14701

K14702

K14703

K14704

K14706

K14801

SILVER ANODISED
ALUMINIUM

K14701

K14702

K14703

K14704

K14706

K14801

POLISHED
CHROME

K14701

K14702

K14703

K14704

K14706

K14801

WHITE

K14701

K14702

K14703

K14704

K14706

K14801

BLACK ANODISED
ALUMINIUM

K14701

K14702

K14703

K14704

K14706

K14801

POLISHED BRONZE

K14701

K14702

K14703

K14704

K14706

K14801

ANTIQUE BRONZE

K14701

K14702

K14703

K14704

K14706

K14801

BRUSHED BRASS

K14701

K14702

K14703

K14704

K14706

K14801

GOLD PLATED

K14701

K14702

K14703

K14704

K14706

K14801


Will only fit
MK Mounting Box
3891 ZIC

Blank Plates

2 MODULE
ARCHITRAVE
MOUNTING
FRAME

1 GANG

2 GANG

		
K14802	K14330 BSS	K14329 BSS
K14802	K14330 PBR	K14329 PBR
K14802	K14330 SAA	K14329 SAA
K14802	K14330 POC	K14329 POC
K14802	K14330 WHI	K14329 WH
K14802	K14330 BLA	K14329 BLA
K14802	K14330 PBZ	K14329 PBZ
K14802	K14330 ABR	K14329 ABR
K14802	K14330 BBR	K14329 BBR
K14802	K14330 GLD	K14329 GLD

Will only fit
MK Mounting Box
3892 ZIC

MOUNTING BOXES

FLUSH:
866 ZIC

DIMENSIONS:
86 x 86mm

FIXING CENTRES:
1 gang: 60.3mm

BS. 5733: 1995

MOUNTING BOXES

FLUSH:
866 ZIC

DIMENSIONS:
86 x 146mm

FIXING CENTRES:
2 gang: 120.6mm

BS. 5733: 1995

