

CONFIDENTIAL. THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF COOPER INDUSTRIES, INC. IT IS NOT FOR PUBLIC DISCLOSURE. POSSESSION OF THE INFORMATION DOES NOT CONVEY ANY RIGHT TO LOAN, SELL OR DISCLOSE THE INFORMATION. UNAUTHORIZED REPRODUCTION OR USE OF THE INFORMATION IS PROHIBITED. THIS DOCUMENT IS TO BE RETURNED TO COOPER INDUSTRIES, INC. UPON COMPLETION OF THE PURPOSE FOR WHICH IT IS LOANED OR UPON REQUEST.

COPYRIGHT Cooper Industries, Inc. This is an unpublished work. The disclosure of this work is limited to select personnel. Further dissemination or disclosure to the public is PROHIBITED. This unpublished work is protected by Federal Copyright law and all rights thereunder are reserved by Cooper Industries, Inc.

SCALE
 $\frac{3}{4} \times$
 UNLESS OTHERWISE SPECIFIED TOLERANCES TO BE:
 METRIC $\pm .13\text{mm}$
 INCHES $\pm .005''$
 ANGULAR $\pm 2^\circ$

DATE
 7-9-02
 NO.
 HMEG

TITLE
 FUSEHOLDER

▲ (O) INDICATES CRITICAL DIMENSION OR FEATURE

SUP. NO.
 HMEG
 DATED
 7-20-00

PAGE 1 OF 2

DWG. JG
 CK.
 CHANGE
 B
 J02280


METRIC(mm)
 INCHES

Ⓟ REVISED & REDRAWN

COOPER Bussmann

St. Louis, MO 63178

DISTRIBUTION
 48995 56 J

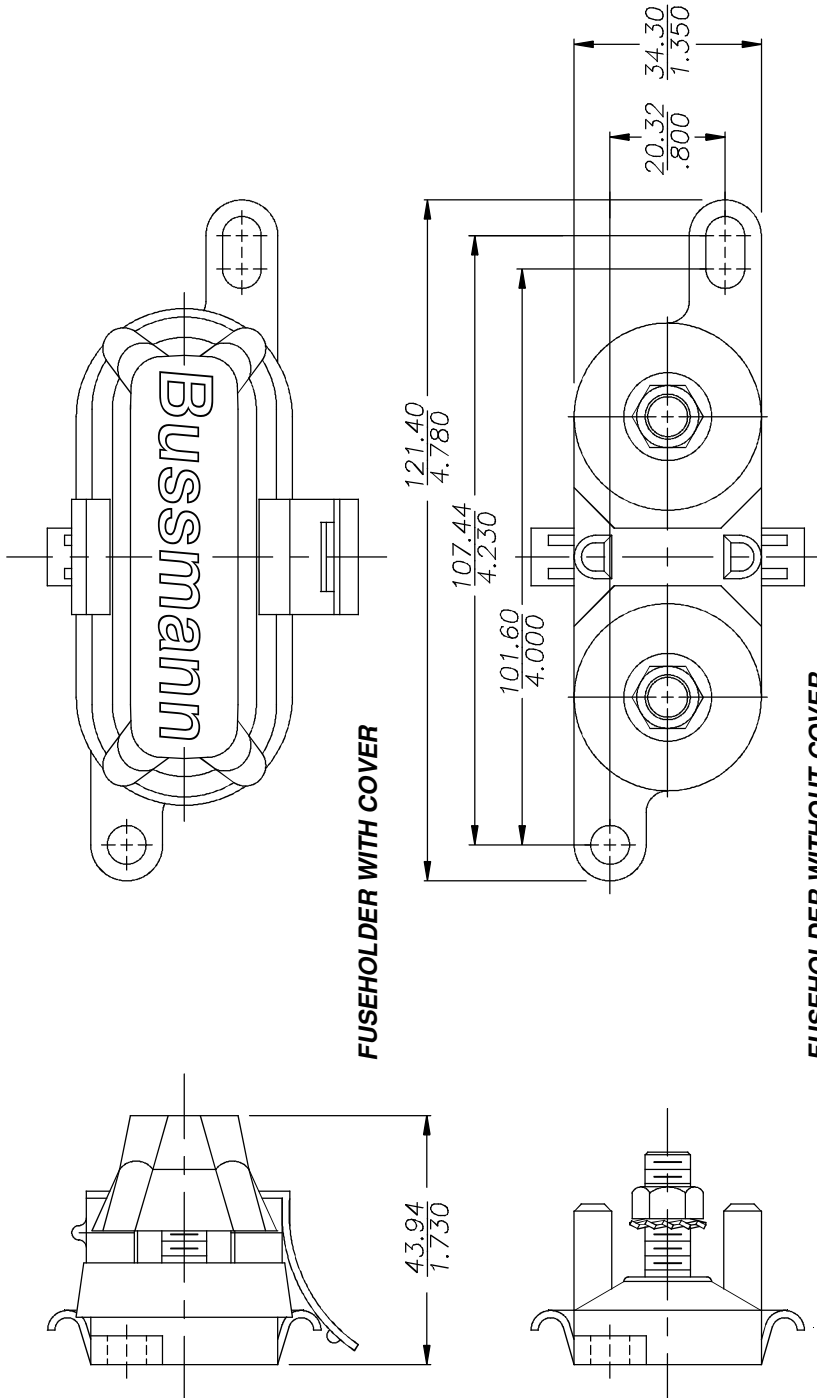

MATERIAL: 94V UL RATED NYLON, COVER- 94HB UL RATED RUBBER, STUD- ZINC PLATED STEEL.
 ELECTRICAL: USE WITH AMG FUSES (100-300 AMPS).
 FUSE MOUNTING: 5/16-18 THREADED STUDS WITH HEX NUTS.
 RECOMMENDED WIRE SIZE: #2-8
 STUD LENGTH: 23mm/.900"
 AMBIENT OPERATING TEMPERATURE: -40°C TO 125°C
 RECOMMENDED MOUNTING HARDWARE: 1/4-20 SCREWS WITH WASHERS.
 RECOMMENDED MOUNTING TORQUE: 5Nm (44 IN-LB, 3.7 FT-LB) MAX.
 STUD TORQUE: 15Nm (10 FT-LB) MAX.
 CABLE POSITIONS: UNLIMITED.
 PACKAGING SPECIFICATION #1P1729
 NOTE: DIMENSIONS SHOWN ARE FOR REFERENCE ONLY.

