

LOC	DIST	REVISIONS							
AJ	16	P	LTR	DESCRIPTION			DATE	DWN	APVD
			A	REVISED PER EC OS14-0150-05			30AUG05	BM	JL

- 1

ZINC PER QQ-Z-363.
- 2

POLYMETHYLPENTENE, GENERAL PURPOSE.
- 3

BERYLLIUM COPPER PER QQ-C-530.
- 4

BRASS PER ASTM-B-453.
- 5




BRASS PER ASTM-B-16.
- 6

NICKEL PLATE PER QQ-N-290,
3.81 μm [.000150] MINIMUM THICK.
- 7


TIN PLATE PER ASTM-B-545,
3.81 μm [.000150] MINIMUM THICK.
- 8

GOLD PLATE PER MIL-G-45204,
0.76 μm [.000030] MINIMUM THICK.
9.

SEE INSTRUCTION SHEET 408-2769.

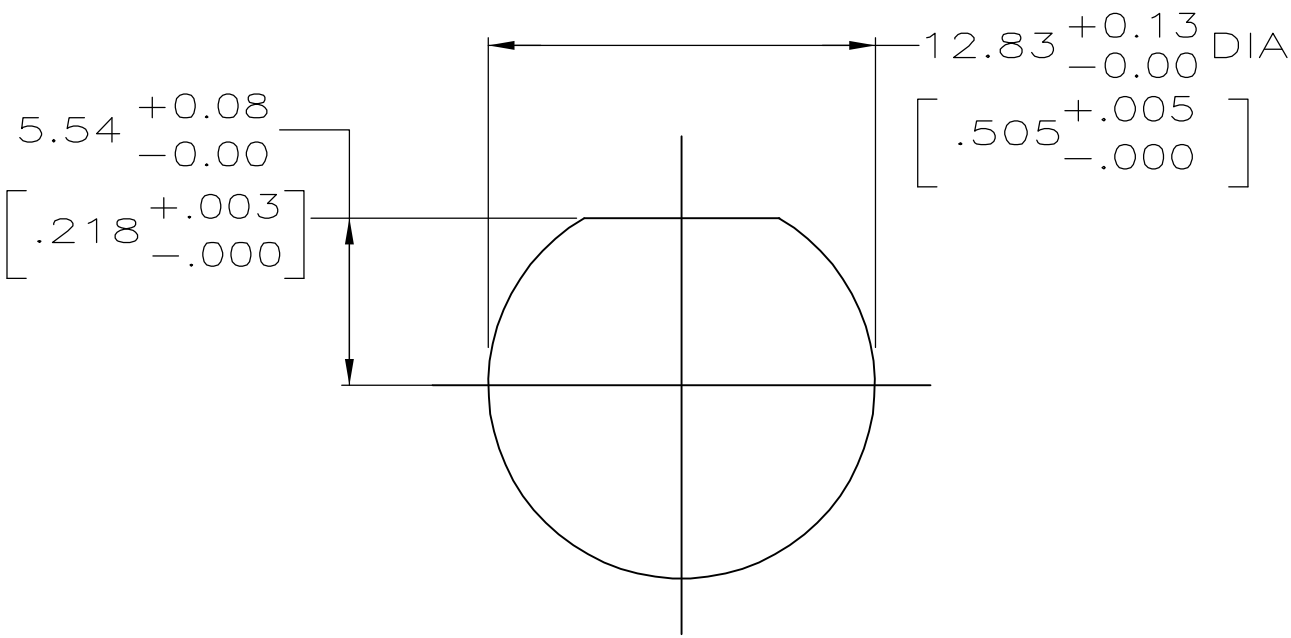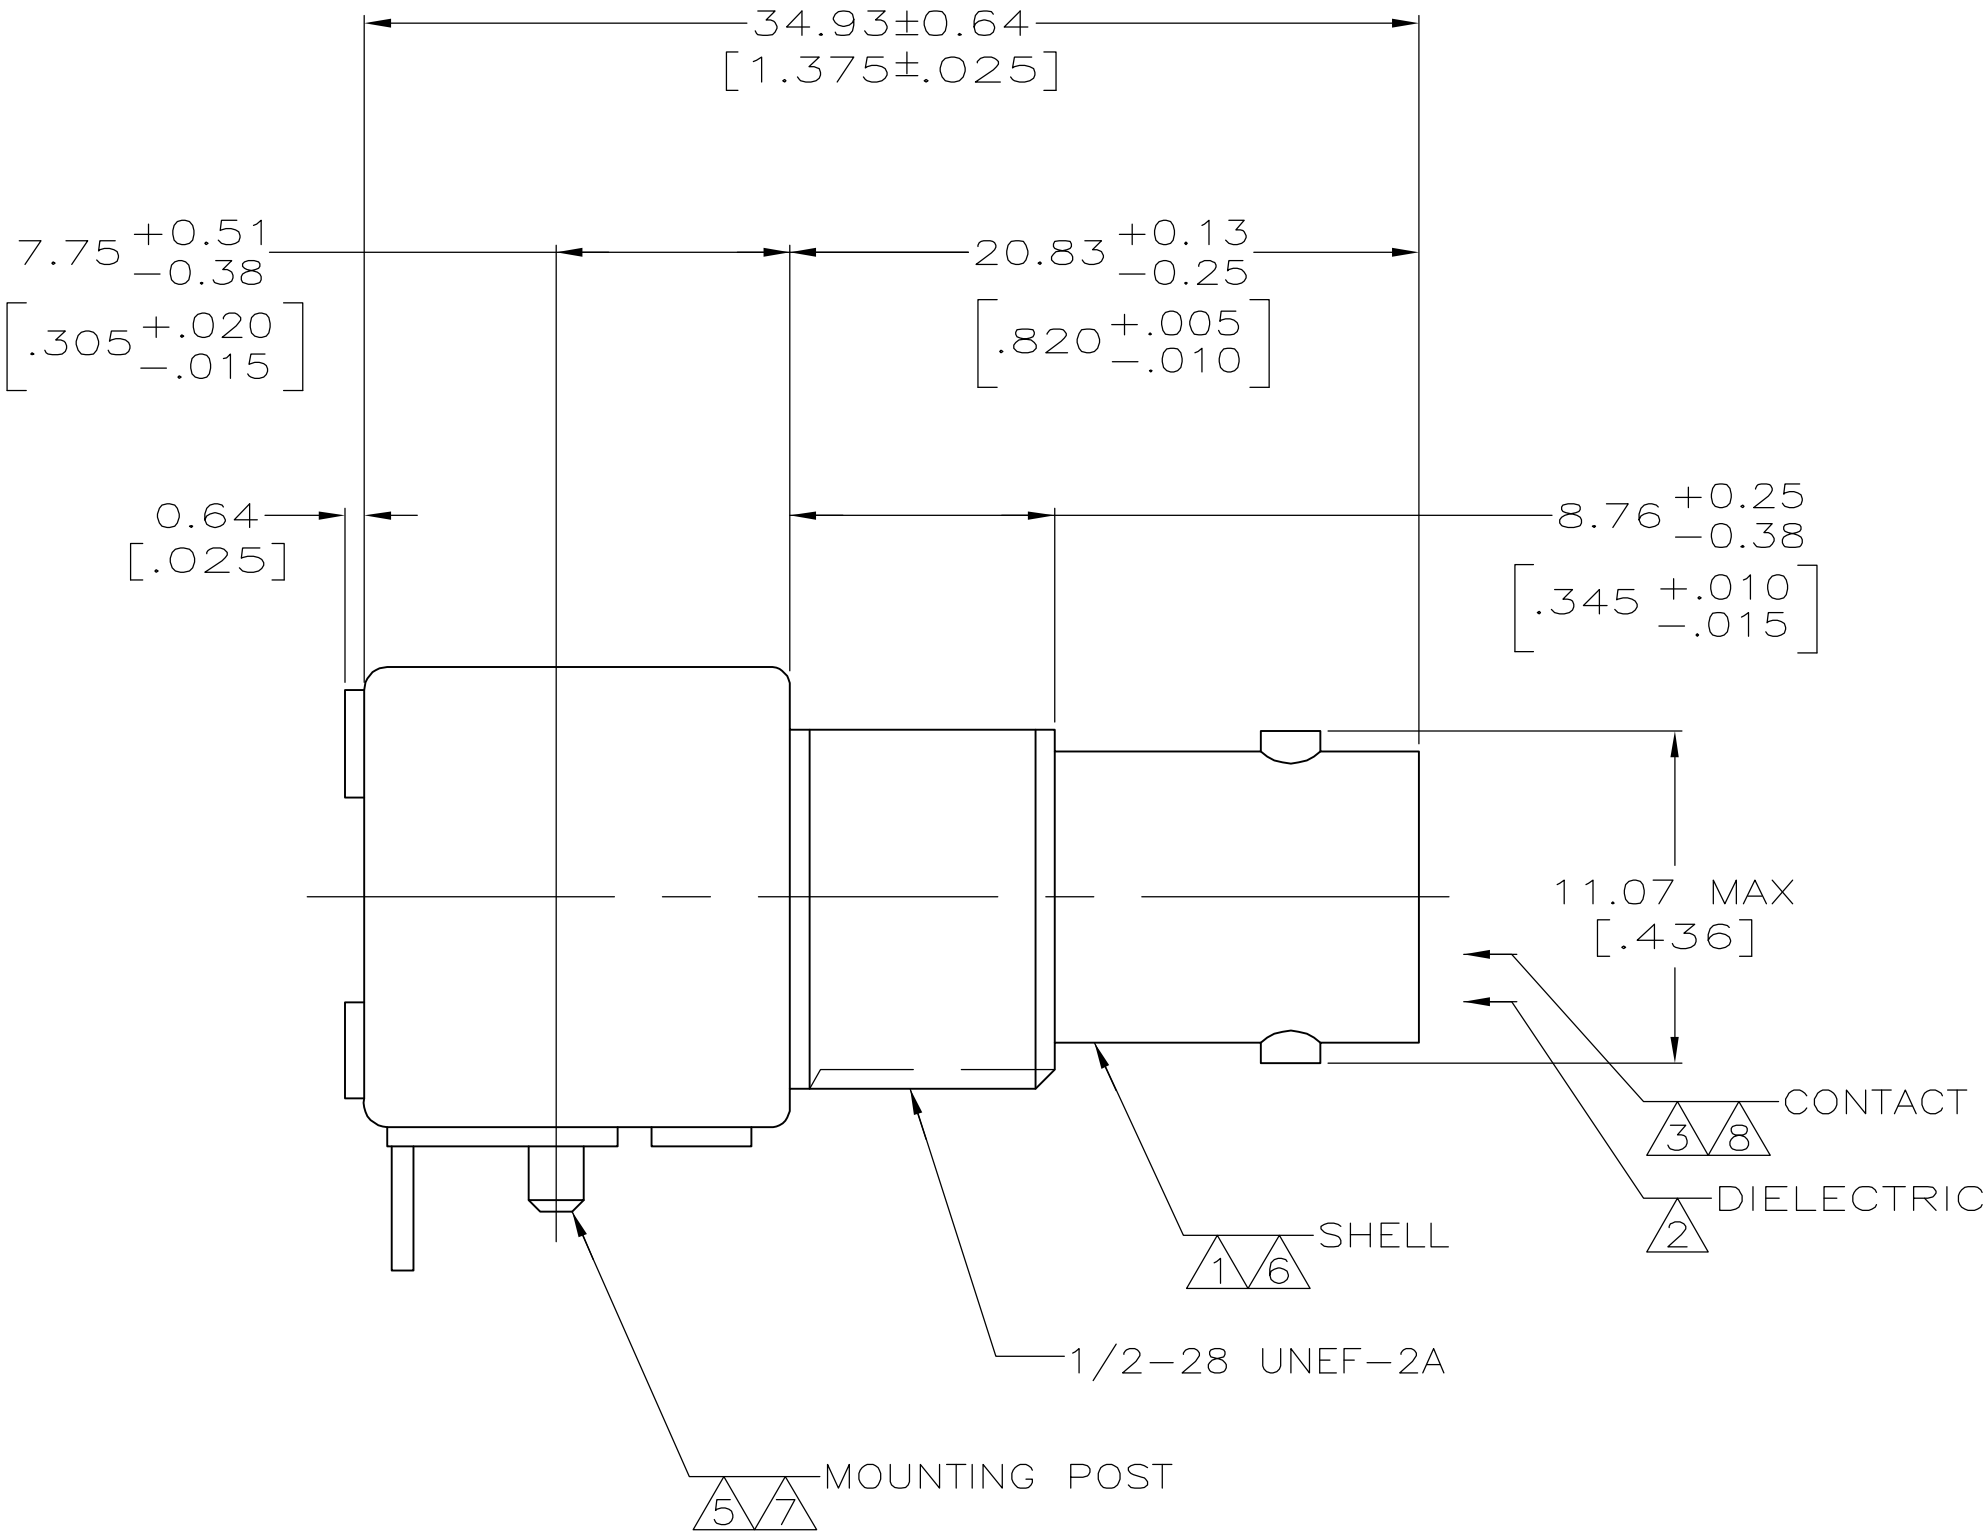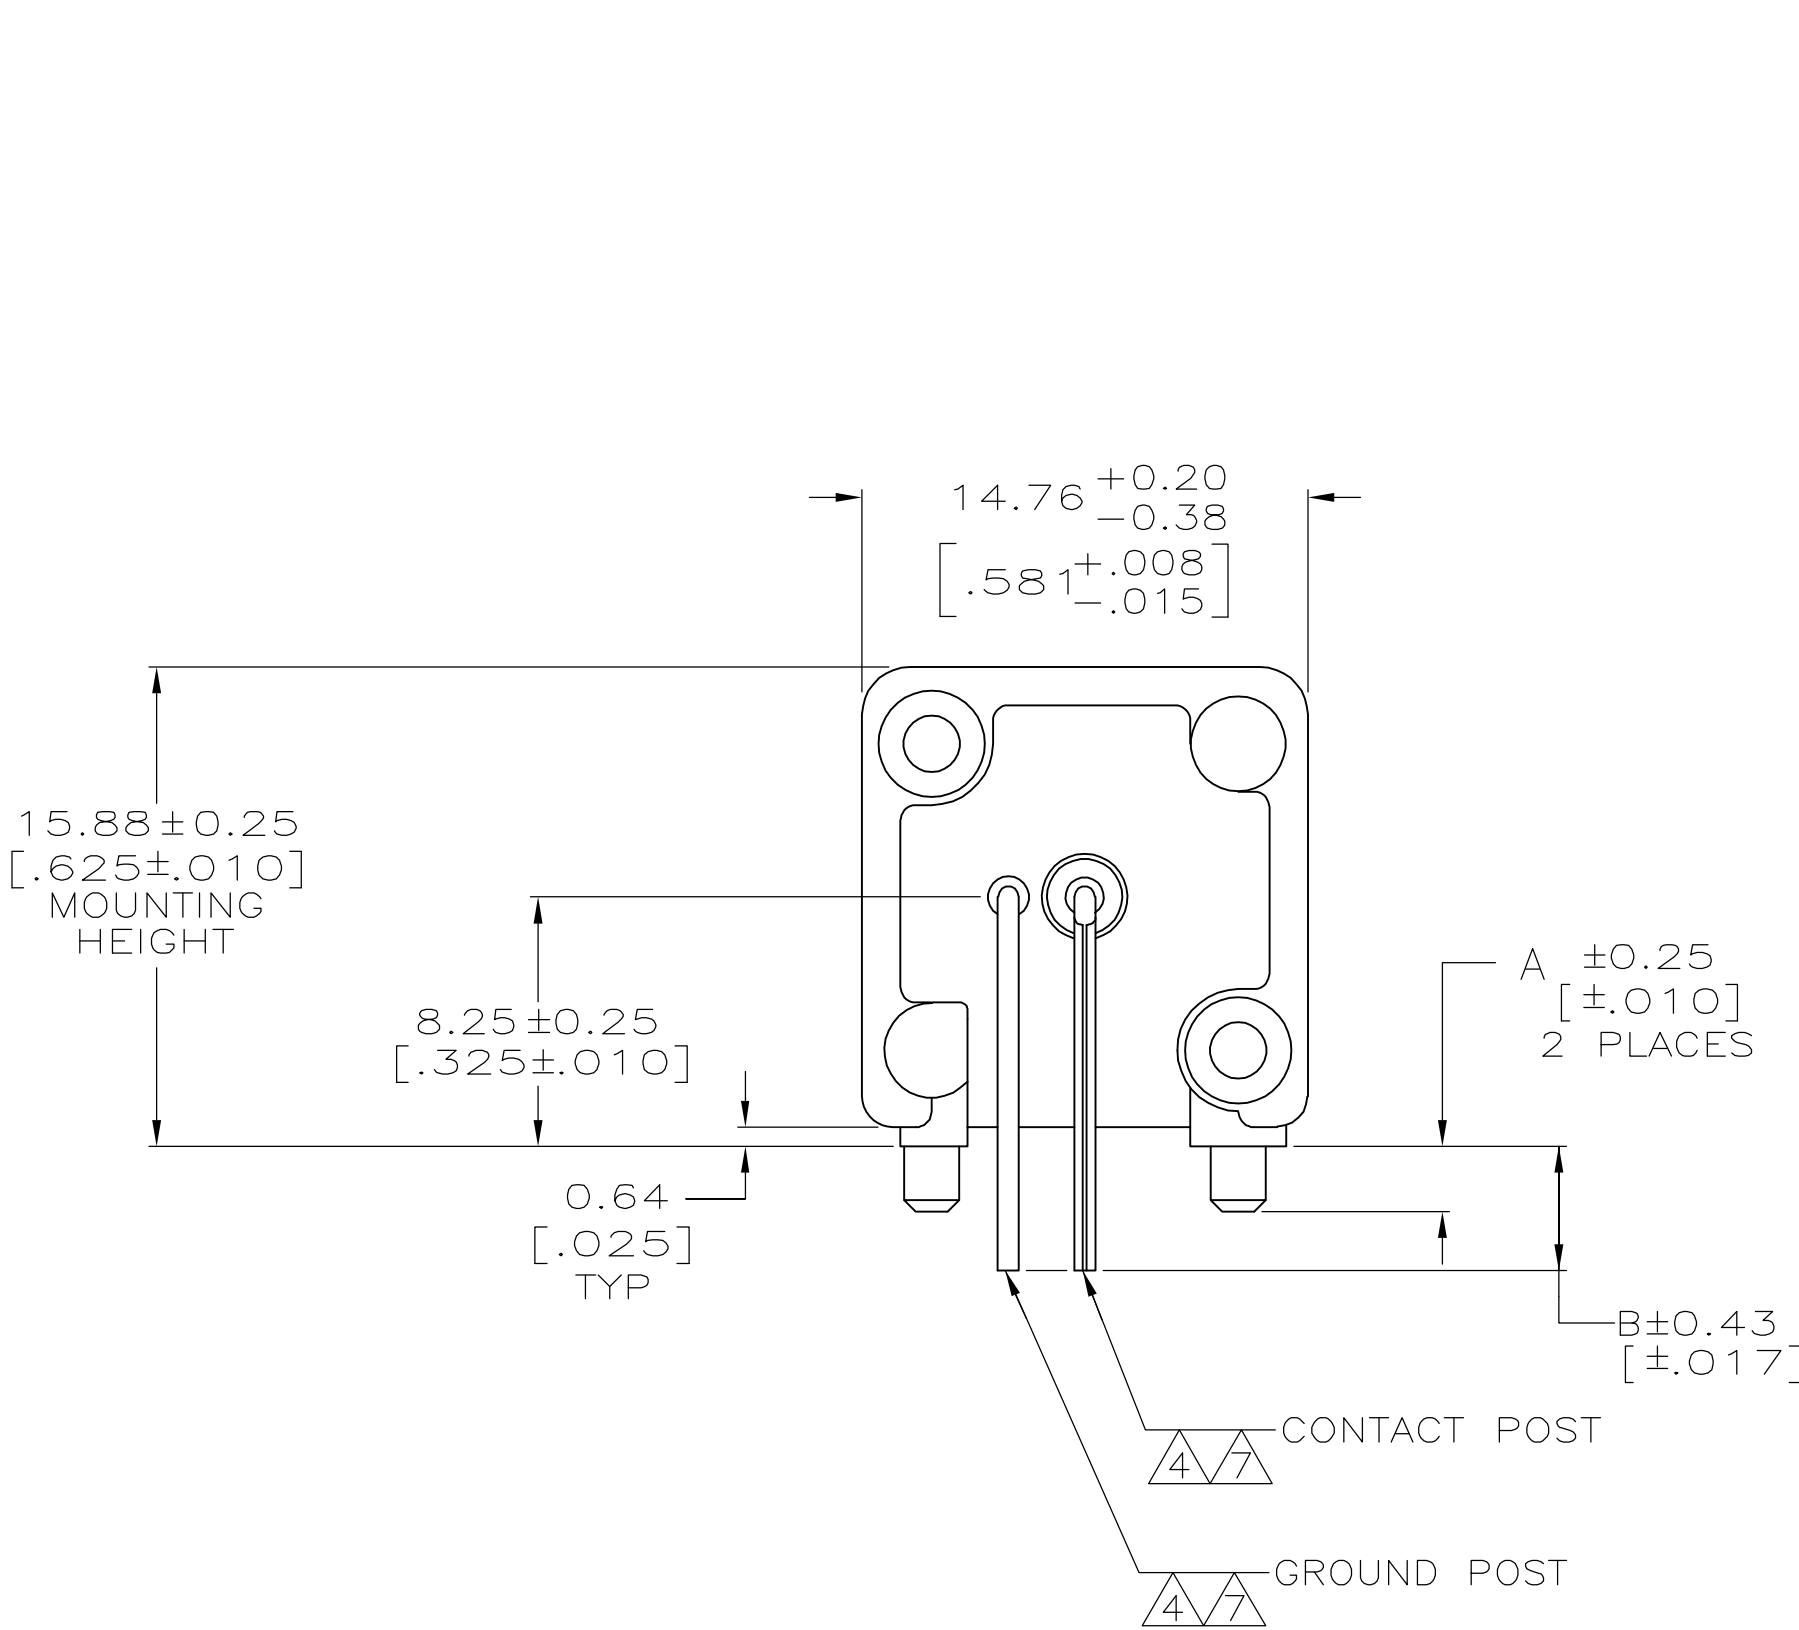


RECOMMENDED PANEL CUTOUT

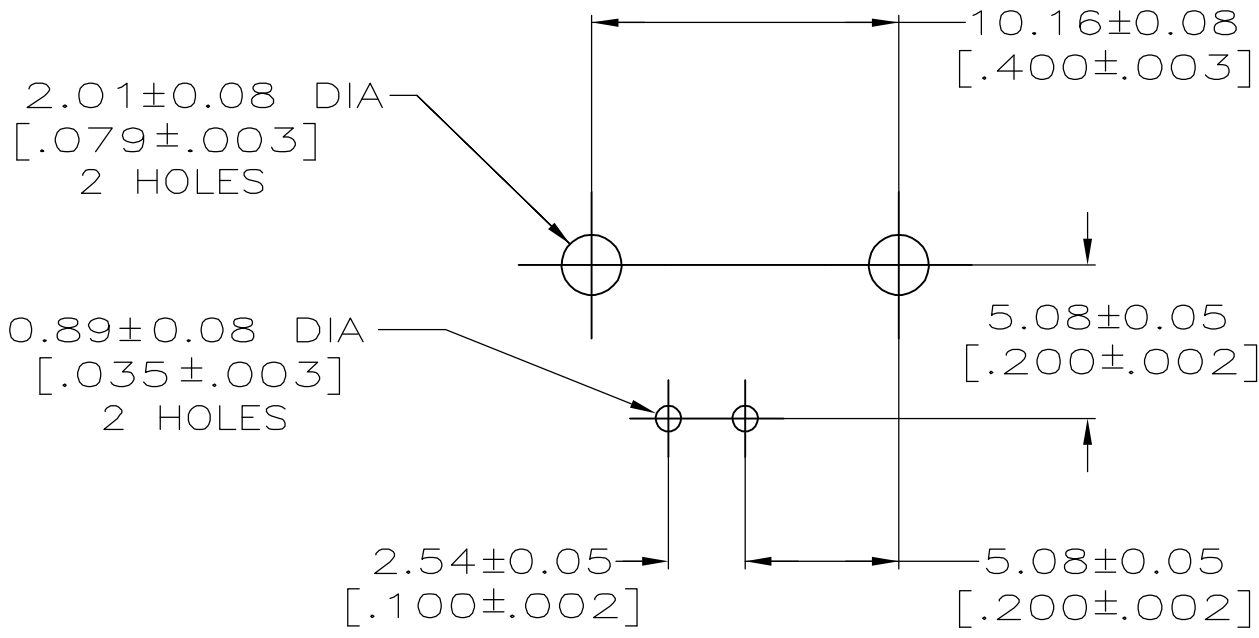

PCB CONFIGURATION

4.11 [.162]	3.48 [.137]	5222092-3
4.11 [.162]	2.16 [.085]	5222092-1
B	A	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN J. ALCORTA - 21APR2005			Tyco Electronics Corporation Harrisburg, Pa 17105-3608			
DIMENSIONS: mm [INCHES]		CHK J. HAVENER - 21APR2005	APVD J. LIPPERT - 21APR2005		NAME			
		TOLERANCES UNLESS OTHERWISE SPECIFIED:		PRODUCT SPEC				
		0 PLC ± —		APPLICATION SPEC				
		1 PLC ± —		—				
		2 PLC ± 0.20 [.008]		—				
MATERIAL SEE NOTES 1-5		FINISH SEE NOTES 6-8		SIZE A1		CAGE CODE 00779	DRAWING NO 5222092	RESTRICTED TO
CUSTOMER DRAWING		SCALE 4:1		SHEET 1 OF 1		REV A		