


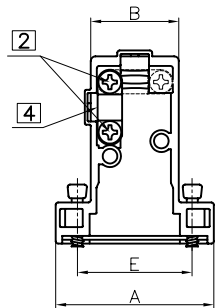


This document is the property of Amphenol Corporation and is delivered on the express condition that it is not to be disclosed, reproduced or used, in whole or in part, for manufacture or sale by anyone other than Amphenol Corporation without its prior consent, & that no right is granted to disclose or to use any information in this document.



Customer drawing




L17158706 /L17159706

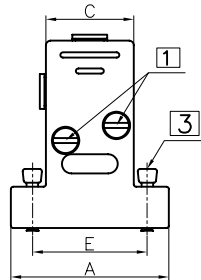


L17158706 /L17159706

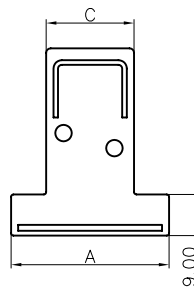


1
Screw
x2



2
Screw
x2



3
locking Screw
x2



4
Strain relief
x1



size	plastic/short screws	metalized / short screws	Dimension							
			A	B	C	D	E	F	G	H
E	L17-1587-06	L17-1597-06	34.5	19.3	-	40.9	25.0	8.15	16.3	6.4
A	L17-1588-06	L17-1598-06	42.9	27.6	-	48.0	33.3	8.15	16.3	9.5
B	L17-1589-06	L17-1599-06	56.6	41.3	32.5	48.0	47.0	8.15	16.3	9.5
C	L17-1590-06	L17-1600-06	73.0	57.7	35.6	53.1	63.5	8.15	16.3	13.5
D	L17-1591-06		70.6	55.4	39.8	53.1	61.1	9.65	19.2	13.5

REVISIONS				
SYM	ECN	DESCRIPTION	DATE	APPROVED
A	HK4729	Release new drawing	10/19/07	IP

D-SUB TECHNICAL DATA

Material and finish:

Shell: plastic type :plastic

metalized type :UL94 V-0 plastic material with plating

Locking screws: Steel , nickel plated

Long screws can be ordered separately:

P/N: L17D4J25401


Screws: Steel, nickel, indication of thread should be matched with the shell

Cable strain relief: Steel . nickel plated


Temperature range: -40°C to 120°C

UNLESS OTHERWISE SPECIFIED TOLERANCES		APPROVAL		DATE	Amphenol
U.S.	METRIC	DRAWN	Christina.cui	10/19/07	
.X +/-	0.50	CHECKED	Wk.wang	10/19/07	
.XX +/-	0.30	CHECKED			
.XXX +/-	0.20				TITLE Metalized and plastic HOOD
FRACTIONS +/-	5°				
ANGLES +/-					SIZE A4
FOR MATERIALS AND FINISHES SEE NOTES		DRAWING FILE :	drawing\Draw\CL71XXX06		
REMOVE SHARP EDGES		ANGLE OF PROJECTION			DRAWING NO. C L171XXX06
DIMENSIONS					
U.S. INCHES					SCALE NONE
METRIC MM					
					SHEET 1 OF 5





Customer drawing




L17158806 /L17159806

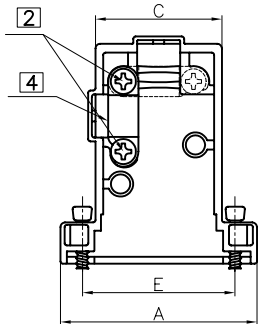


L17158806 /L17159806

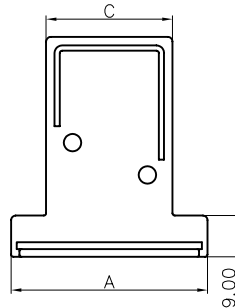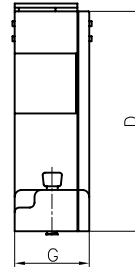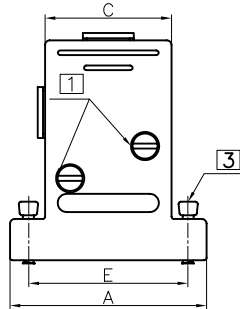


1
Screw
x2



2
Screw



3
locking Screw
x2



4
Strain relief
x1



size	plastic/short screws	metalized / short screws	Dimension							
			A	B	C	D	E	F	G	H
E	L17-1587-06	L17-1597-06	34.5	19.3	-	40.9	25.0	8.15	16.3	6.4
A	L17-1588-06	L17-1598-06	42.9	27.6	-	48.0	33.3	8.15	16.3	9.5
B	L17-1589-06	L17-1599-06	56.6	41.3	32.5	48.0	47.0	8.15	16.3	9.5
C	L17-1590-06	L17-1600-06	73.0	57.7	35.6	53.1	63.5	8.15	16.3	13.5
D	L17-1591-06		70.6	55.4	39.8	53.1	61.1	9.65	19.2	13.5

REVISIONS				
SYM	ECN	DESCRIPTION	DATE	APPROVED
A	HK4729	Release new drawing	10/19/07	IP

D-SUB TECHNICAL DATA

Material and finish:

Shell: plastic type :plastic

metalized type :UL94 V-0 plastic material with plating

Locking screws: Steel , nickel plated

Long screws can be ordered separately:

P/N: L17D4J25401

Screws: Steel, nickel, indication of thread should be matched with the shell


Cable strain relief: Steel . nickel plated

Temperature range: -40°C to 120°C


UNLESS OTHERWISE SPECIFIED TOLERANCES		APPROVAL		DATE		Amphenol		
U.S.		DRAWN	Christina.cui	10/19/07				
METRIC		CHECKED	Wk.wang	10/19/07				
		CHECKED						
.X +/- 0.50						TITLE		
.XX +/- 0.30								
.XXX +/- 0.20						Metalized and plastic HOOD		
FRACTIONS +/-								
ANGLES +/- 5°								
FOR MATERIALS AND FINISHES SEE NOTES		DRAWING FILE :		drawing\Draw\CL71XXX06				
REMOVE SHARP EDGES		ANGLE OF PROJECTION						
DIMENSIONS				SIZE		DRAWING NO.		REV.
U.S. INCHES				A4		C L171XXX06		
METRIC MM				SCALE		NONE		SHEET 2 OF 5

This document is the property of Amphenol Corporation and is delivered on the express condition that it is not to be disclosed, reproduced or used, in whole or in part, for manufacture or sale by anyone other than Amphenol Corporation without its prior consent, & that no right is granted to disclose or to use any information in this document.





Customer drawing




L17158906 /L17159906

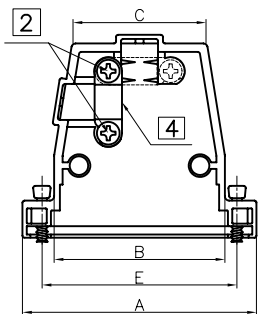


L17158906 /L17159906

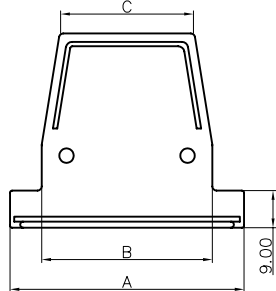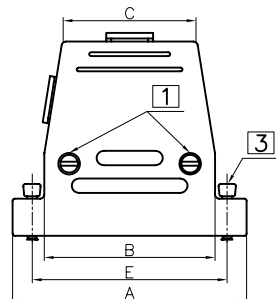


1
Screw
x2



2
Screw
x2



3
locking Screw
x2



4
Strain relief
x1



size	plastic/short screws	metalized / short screws	Dimension							
			A	B	C	D	E	F	G	H
E	L17-1587-06	L17-1597-06	34.5	19.3	-	40.9	25.0	8.15	16.3	6.4
A	L17-1588-06	L17-1598-06	42.9	27.6	-	48.0	33.3	8.15	16.3	9.5
B	L17-1589-06	L17-1599-06	56.6	41.3	32.5	48.0	47.0	8.15	16.3	9.5
C	L17-1590-06	L17-1600-06	73.0	57.7	35.6	53.1	63.5	8.15	16.3	13.5
D	L17-1591-06		70.6	55.4	39.8	53.1	61.1	9.65	19.2	13.5

REVISIONS				
SYM	ECN	DESCRIPTION	DATE	APPROVED
A	HK4729	Release new drawing	10/19/07	IP

D-SUB TECHNICAL DATA

Material and finish:

Shell: plastic type :plastic

metalized type :UL94 V-0 plastic material with plating

Locking screws: Steel , nickel plated


Long screws can be ordered separately:

P/N: L17D4J25401

Screws: Steel, nickel, indication of thread should be matched with the shell


Cable strain relief: Steel . nickel plated

Temperature range: -40°C to 120°C


UNLESS OTHERWISE SPECIFIED TOLERANCES		APPROVAL		DATE	Amphenol
U.S.	METRIC	DRAWN	Christina.cui	10/19/07	
.X +/-	0.50	CHECKED	lik.wang	10/19/07	
.XX +/-	0.30	CHECKED			
.XXX +/-	0.20				TITLE
FRACTIONS +/-					
ANGLES +/-	5°				Metalized and plastic HOOD
FOR MATERIALS AND FINISHES SEE NOTES		DRAWING FILE : drawing\Draw\L171XXX06			
REMOVE SHARP EDGES		ANGLE OF PROJECTION			SIZE
DIMENSIONS					
U.S.	INCHES				DRAWING NO.
METRIC	MM				
					REV.
					SCALE
					SHEET
					3 OF 5

This document is the property of Amphenol Corporation and is delivered on the express condition that it is not to be disclosed, reproduced or used, in whole or in part, for manufacture or sale by anyone other than Amphenol Corporation without its prior consent, & that no right is granted to disclose or to use any information in this document.


Customer drawing

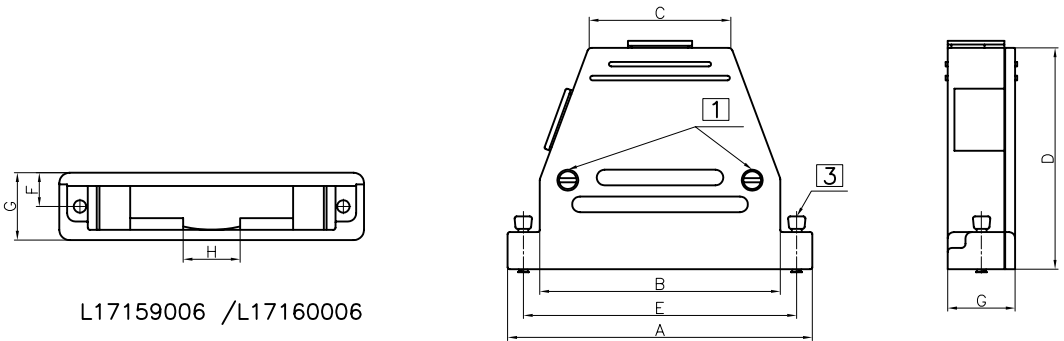

L17159006 /L17160006

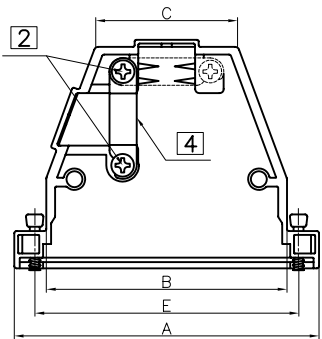

L17159006 /L17160006

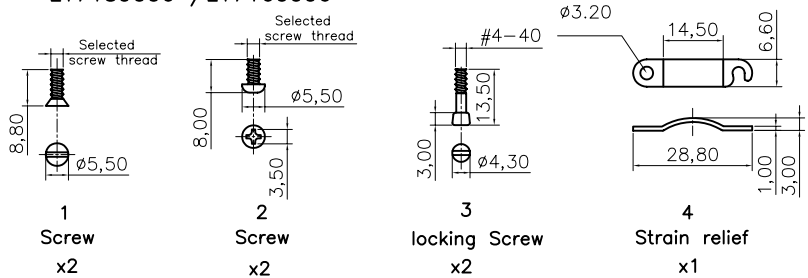

size	plastic/short screws	metalized / short screws	Dimension							
			A	B	C	D	E	F	G	H
E	L17-1587-06	L17-1597-06	34.5	19.3	-	40.9	25.0	8.15	16.3	6.4
A	L17-1588-06	L17-1598-06	42.9	27.6	-	48.0	33.3	8.15	16.3	9.5
B	L17-1589-06	L17-1599-06	56.6	41.3	32.5	48.0	47.0	8.15	16.3	9.5
C	L17-1590-06	L17-1600-06	73.0	57.7	35.6	53.1	63.5	8.15	16.3	13.5
D	L17-1591-06		70.6	55.4	39.8	53.1	61.1	9.65	19.2	13.5

REVISIONS				
SYM	ECN	DESCRIPTION	DATE	APPROVED
A	HK4729	Release new drawing	10/19/07	IP

D-SUB TECHNICAL DATA

Material and finish:
Shell: plastic type :plastic
metalized type :UL94 V-0 plastic material with plating
Locking screws: Steel , nickel plated
Long screws can be ordered separately:
P/N: L17D4J25401
Screws: Steel, nickel, indication of thread should be matched with the shell
Cable strain relief: Steel . nickel plated
Temperature range: -40°C to 120°C

UNLESS OTHERWISE SPECIFIED TOLERANCES		APPROVAL		DATE	Amphenol
U.S.	METRIC	DRAWN	Christina.cui	10/19/07	
.X +/-	0.50	CHECKED	lik.wang	10/19/07	
.XX +/-	0.30	CHECKED			
.XXX +/-	0.20				TITLE
FRACTIONS +/-	5°				
ANGLES +/-					Metalized and plastic HOOD
FOR MATERIALS AND FINISHES SEE NOTES		DRAWING FILE : drawing\Draw\CLF71XXX06			
REMOVE SHARP EDGES		ANGLE OF PROJECTION			SIZE DRAWING NO.
DIMENSIONS					
U.S.	INCHES				C L171XXX06
METRIC	MM				
					SCALE
					SHEET 4 OF 5


This document is the property of Amphenol Corporation and is delivered on the express condition that it is not to be disclosed, reproduced or used, in whole or in part, for manufacture or sale by anyone other than Amphenol Corporation without its prior consent, & that no right is granted to disclose or to use any information in this document.

Customer drawing

REVISIONS				
SYM	ECN	DESCRIPTION	DATE	APPROVED
A	HK4729	Release new drawing	10/19/07	IP

D-SUB TECHNICAL DATA

Material and finish:
Shell: plastic type :plastic
metalized type :UL94 V-0 plastic material with plating
Locking screws: Steel , nickel plated
Long screws can be ordered separately:
P/N: L17D4J25401
Screws: Steel, nickel, indication of thread should be matched
with the shell
Cable strain relief: Steel . nickel plated
Temperature range: -40°C to 120°C

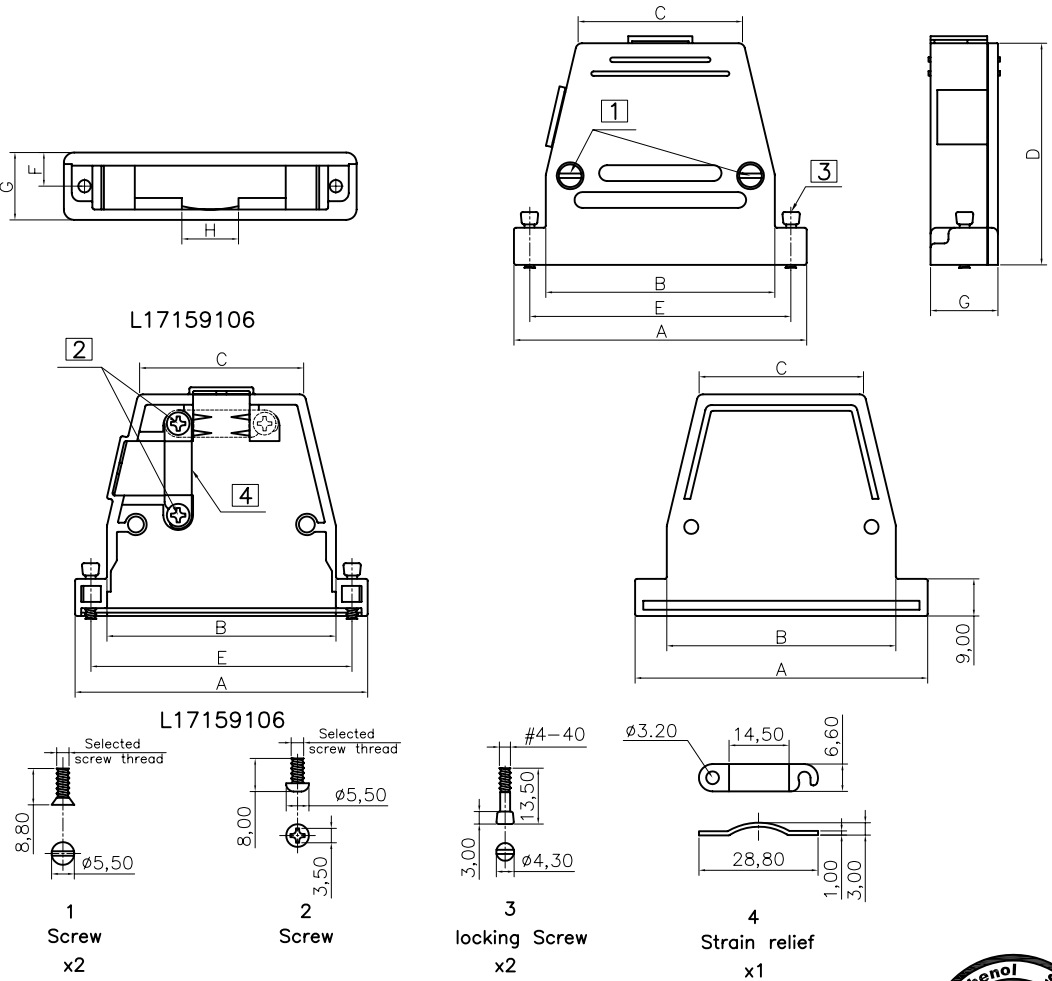

size	plastic/short screws	metalized / short screws	Dimension							
			A	B	C	D	E	F	G	H
E	L17-1587-06	L17-1597-06	34.5	19.3	-	40.9	25.0	8.15	16.3	6.4
A	L17-1588-06	L17-1598-06	42.9	27.6	-	48.0	33.3	8.15	16.3	9.5
B	L17-1589-06	L17-1599-06	56.6	41.3	32.5	48.0	47.0	8.15	16.3	9.5
C	L17-1590-06	L17-1600-06	73.0	57.7	35.6	53.1	63.5	8.15	16.3	13.5
D	L17-1591-06		70.6	55.4	39.8	53.1	61.1	9.65	19.2	13.5



UNLESS OTHERWISE SPECIFIED TOLERANCES		APPROVAL		DATE	Amphenol
U.S.	METRIC	DRAWN	Christina.cui	10/19/07	
.X +/-	0.50	CHECKED	Wk.wang	10/19/07	
.XX +/-	0.30	CHECKED			
.XXX +/-	0.20				TITLE
FRACTIONS +/-	5'				
ANGLES +/-					Metalized and plastic HOOD
FOR MATERIALS AND FINISHES SEE NOTES		DRAWING FILE :			SIZE
REMOVE SHARP EDGES		drawing\Draw\CL71XXX06			
DIMENSIONS		ANGLE OF PROJECTION			DRAWING NO.
U.S.	INCHES				
METRIC	MM				REV.
					SCALE
					SHEET
					5 OF 5